

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 849 948 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
13.03.2002 Bulletin 2002/11

(51) Int Cl.7: **H04N 7/16**

(21) Application number: **98100155.5**

(22) Date of filing: **02.12.1993**

(54) **Remote control for cable television delivery system**

Fernbedienung für Kabelfernsehverteilssysteme

Télécommande pour systèmes de distribution de télévision par câble

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IE IT LI NL PT SE

(30) Priority: **09.12.1992 US 991074**

(43) Date of publication of application:
24.06.1998 Bulletin 1998/26

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
94904392.1 / 0 673 583

(73) Proprietor: **DISCOVERY COMMUNICATIONS, INC.**
Bethesda, MD 20814-3522 (US)

(72) Inventors:
• **Hendricks, John**
Potomac, MD 20854 (US)
• **Bonner, Alfred**
Bethesda, MD 20817 (US)

• **Wunderlich, Richard**
Alpharetta, GA 30201 (US)
• **Berkobin, Eric**
Woodstock, GA 30188 (US)

(74) Representative: **Strehl Schübel-Hopf & Partner**
Maximilianstrasse 54
80538 München (DE)

(56) References cited:
WO-A-86/01962 WO-A-91/00670
US-A- 4 381 522 US-A- 5 144 663

• **PATENT ABSTRACTS OF JAPAN vol. 011, no.**
370 (P-642), 3 December 1987 & JP 62 140134 A
(MATSUSHITA ELECTRIC IND CO LTD), 23 June
1987,
• **PATENT ABSTRACTS OF JAPAN vol. 013, no.**
397 (P-928), 5 September 1989 & JP 01 142918 A
(MATSUSHITA ELECTRIC IND CO LTD), 5 June
1989,

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 849 948 B1

Description**RELATED APPLICATIONS**

- 5 [0001] This application is a continuation-in-part of application Serial Number 07/991,074 filed December 9, 1992, entitled TELEVISION PROGRAM PACKAGING AND DELIVERY SYSTEM WITH MENU DRIVEN SUBSCRIBER ACCESS. The following publications are also based on the above-referenced patent application: EP-A-0 673 578 to EP-A-0 673 582, EP-A-0 674 824, EP-A-0 732 027, EP-A-0 732 030, EP-A-0 732 031, and US-A-5 307 627.

10 **TECHNICAL FIELD**

[0002] The invention relates to television entertainment systems for providing television programming to consumer homes. More particularly, the invention relates to a remote control for a cable television delivery system.

15 **BACKGROUND OF THE INVENTION**

[0003] Advances in television entertainment have been primarily driven by breakthroughs in technology. In 1939, advances on Vladimir Zworykin's picture tube provided the stimulus for NBC to begin its first regular broadcasts. In 1975, advances in satellite technology provided consumers with increased programming to homes.

- 20 [0004] Many of these technology breakthroughs have produced inconvenient systems for consumers. One example is the ubiquitous three remote control home, having a separate and unique remote control for the TV, cable box and VCR. More recently, technology has provided cable users in certain parts of the country with 100 channels of programming. This increased program capacity is beyond the ability of many consumers to use effectively. No method of managing the program choices has been provided to consumers.

- 25 [0005] Consumers are demanding that future advances in television entertainment, particularly programs and program choices, be presented to the consumer in a user friendly manner. Consumer preferences, instead of technological breakthroughs, will drive the television entertainment market for at least the next 20 years. As computer vendors have experienced a switch from marketing new technology in computer hardware to marketing better useability, interfaces and service, the television entertainment industry will also experience a switch from new technology driving the market

- 30 to consumer useability driving the market.
[0006] Consumers want products incorporating new technology that are useful, and will no longer purchase new technology for the sake of novelty or status. Technological advances in sophisticated hardware are beginning to surpass the capability of the average consumer to use the new technology. Careful engineering must be done to make entertainment products incorporating new technology useful and desired by consumers.

- 35 [0007] PATENT ABSTRACTS OF JAPAN vol. 011, no. 370 (P-642), 3 December 1987 & JP 62 140134 A (MATSUSHITA ELECTRIC IND CO LTD), 23 June 1987, discloses an apparatus in which menus and submenus are selected according to cursor movements by using cursor shift means and cursor selecting means.

- [0008] US - A - 4 381 522 discloses a cable television system which allows to remotely order programs by establishing a connection over a telephone line with a computer at a cable headend side and dialling a number corresponding to the desired program.

- 40 [0009] WO - A - 86 01 962 discloses a subscription television system in which template pages corresponding to billing accounts can be received by a decoder on a program receiver side, basically according to a teletext process, with the corresponding possibility of remote control selection of pages.

- [0010] In order for new television entertainment products to be successful, the products must satisfy consumer demands. TV consumers wish to go from limited viewing choices to a variety of choices, from no control of programming to complete control. Consumers wish to advance from cumbersome and inconvenient television to easy and convenient television and keep costs down. Consumers do not wish to pay for one hundred channels when due to lack of programming information, they seldom, if ever, watch programming on many of these channels.

- 45 [0011] The concepts of interactive television, high definition television and 300 channel cable systems in consumer homes will not sell if they are not packaged, delivered and presented in a useable fashion to consumers. The problem is that TV programming is not being delivered and presented to consumers in a user friendly manner.

- [0012] Consumers are already being bombarded with programming options, numerous "free" cable channels, subscription cable channels and pay-per-view choices. Any further increase in TV entertainment choices, without a user friendly presentation and approach, will likely bewilder viewers with a mind-numbing array of choices.

- 50 [0013] The TV industry has traditionally marketed and sold its programs to consumers in bulk, such as continuous feed broadcast and long-term subscriptions to movie channels. The TV industry is unable to sell its programming in large quantities on a unit per unit basis, such as the ordering of one program. Consumers prefer a unit sales approach because it keeps costs down and allows the consumer to be more selective in their viewing.

[0014] In addition, viewership fragmentation, which has already begun, will increase. Programming not presented in a user friendly manner will suffer with a decrease in viewership and revenue. As programming presentation becomes more user friendly, users seek additional features and functional capabilities.

[0015] What is needed is a system which can deliver and present television programming through a user friendly interface which allows the consumer to easily select from among the many program choices.

[0016] What is needed is a set top converter that provides a user friendly interface for subscribers to access television programs.

[0017] What is needed is a set top converter with enhanced functionality.

[0018] What is needed is a set top converter that provides users with advanced features and capabilities.

[0019] What is needed is a method that allows efficient access to hundreds of television programming options.

[0020] What is needed is technology that upgrades the functionality of existing set top converters.

[0021] What is needed is hardware that provides an upgrade capability allowing the use of existing set top converter technology in advanced program delivery systems.

[0022] What is needed is a set top converter that provides an upstream communications capability between the set top converter and cable headend.

[0023] What is needed is a set top converter that provides a capability of generating menus for display.

[0024] What is needed is a set top converter that provides a simple way to select a program from a menu.

[0025] What is needed is a set top converter that allows users to subscribe on-screen to specialty channels.

[0026] What is needed is a set top converter that monitors subscriber viewing choices for statistical purposes.

[0027] What is needed is a set top converter that provides sophisticated on-screen television menus which can incorporate still video and moving video.

[0028] What is needed is a set top converter that provides a capability of scaling and redirecting video for menus. The present invention is addressed to fulfill these needs.

SUMMARY OF INVENTION

[0029] A method according to the present invention is set out in claim 1. Remote controls and a receiving interface system according to the present invention are set out in claims 10, 26 and 17 respectively.

[0030] The present invention can be used with a set top converter box or terminal for a television program delivery system. More specifically, the present invention can be used with an advanced set top converter box that acts as a terminal in the viewer home. The set top terminal is a key component of a digital cable television delivery system. The set top terminal is an upgradeable system that provides for the decompression of digital program signals. The preferred set top terminal provides both a menu generation capability as well as a number of advanced features and functional capabilities.

[0031] The preferred set top terminal may be achieved through a set of hardware upgrades to any of the following embodiments: (1) an existing set top converter upgraded with a circuit card (which has a microprocessor electronically connected to the set top converter); (2) an industry standard decompression converter upgradeable by either an upgrade module or a menu generation card; and (3) a set top converter box capable of both decompression and menu generation. The hardware upgrades provide additional advanced features and functional capabilities to any of these embodiments.

[0032] A number of advanced features and functional capabilities are supported by the preferred set top terminal. This set top terminal provides subscribers with a picture-on-picture capability without requiring a special television to support the capability. The set top terminal also supports a TV guide service, which provides subscribers with information on all programming available at its particular subscriber location. The set top terminal further includes the capability of querying viewers to establish, among other things, favorite channel lists, personal profile data and mood information. The set top terminal allows the subscriber to view promotional menus on future programming events.

[0033] The set top terminal supports additional capabilities using its hardware upgrades that allow subscribers to use other interactive services, for example, to engage in on-line question and answer sessions, to order and confirm airline tickets, and to access a variety of other data services. The set top terminal makes use of a digital tuner as a hardware upgrade to provide subscribers with a digital audio capability.

[0034] The preferred set top terminal may be used to control video tape machines, thereby simplifying the recording of programs. The set top terminal can, in conjunction with the program delivery system, easily support high definition television (HDTV). For subscribers living in remote locations, the set top terminal accommodates backyard satellite systems. In addition to all the features that the set top terminal supports with its current internal programming and upgradeability, additional features may be added or existing features increased through remote reprogramming of the set top terminal 220.

[0035] It is an object of the invention to provide a user friendly interface for subscribers to access television programs.

[0036] It is an object of the invention to allow users to easily navigate through hundreds of programming choices

using on-screen menus.

[0037] It is an object of this invention to efficiently access hundreds of television programming options.

[0038] It is an object of this invention to upgrade the functionality of existing set top converters.

5 [0039] It is an object of this invention to provide an upgrade capability allowing the use of existing set top converter technology in an advanced program delivery system.

[0040] It is an object of this invention to provide an upstream communications capability between the set top converter and cable headend.

[0041] It is an object of this invention to provide a set top terminal capable of generating menus for display.

[0042] It is an object of this invention to allow users to subscribe on-screen to specialty channels.

10 [0043] It is an object of this invention to monitor subscriber viewing choices for statistical purposes.

[0044] It is an object of this invention to provide sophisticated on-screen television menus which can incorporate still video and moving video.

[0045] These and other objects and advantages of the invention will become obvious to those skilled in the art upon review of the following description, the attached drawings and appended claims.

15

DESCRIPTION OF THE DRAWINGS

[0046] Figure 1 is a diagram of the primary components of the television delivery system.

[0047] Figure 2 is an overview of the television delivery system operations.

20 [0048] Figure 3 is a schematic of the operation of the primary components of the system.

[0049] Figure 4 is a block diagram of the hardware components of the set top terminal.

[0050] Figure 5a is a perspective front view of a set top terminal.

[0051] Figure 5b is a perspective rear view of a set top terminal.

[0052] Figure 6 is a schematic of a Turbo card upgrade for a set top terminal.

25 [0053] Figure 7a is a drawing of a frame format for program control information signal.

[0054] Figure 7b is a drawing of a frame format for a polling response from the set top terminal.

[0055] Figure 8 is a drawing of the basic menus used in the present invention, including the ten major menus represented by icons.

[0056] Figure 9a is a schematic of a basic decompression box with upgrade module and associated connections.

30 [0057] Figure 9b is a schematic of an alternative embodiment of a simple decompression box with upgrade module and associated connections.

[0058] Figure 10 is a more detailed block diagram of the components of a simple decompression box with upgrade module.

[0059] Figure 11 is a schematic of the set top terminal's upstream data transmission hardware.

35 [0060] Figure 12a is a schematic showing the components of the Level A, B, and C hardware upgrades.

[0061] Figure 12b is a schematic showing the components of the Level D hardware upgrade.

[0062] Figure 13a is a schematic showing the two parts of a remote control unit.

[0063] Figure 13b is a drawing of the preferred remote control unit.

[0064] Figure 14 is a diagram of the components of a set top terminal having a picture-on-picture capability.

40 [0065] Figure 15 is a drawing of a menu related to program catalogue services.

[0066] Figures 16a through 16d are drawings of viewer querying and mood question menus.

[0067] Figures 17a and 17b are drawings of the set top terminal hardware components that accommodate transparent channel switching.

[0068] Figure 18 is a drawing of an interactive television promotional menu for a set top terminal hardware upgrade.

45 [0069] Figures 19a and 19b are drawings of submenus for interactive television services using hardware upgrade Level A

[0070] Figures 20a through 20d are drawings of interactive services using hardware upgrade Level B, which are related to on-screen airline reservations.

[0071] Figure 21 is a drawing of a menu for digital audio services.

50 [0072] Figure 22 is a drawing of a menu related to program guide services.

[0073] Figure 23 is a drawing of a menu related to high definition television (HDTV) programming.

55

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**A. Television Program Delivery System Description****1. Introduction**

[0074] Figure 1 shows the present invention as part of an expanded cable television program delivery system 200 that dramatically increases programming capacity using compressed transmission of television program signals. Developments in digital bandwidth compression technology now allow much greater throughput of television program signals over existing or slightly modified transmission media. The program delivery system 200 shown provides subscribers with a user friendly interface to operate and exploit a six-fold or more increase in current program delivery capability.

[0075] Subscribers are able to access an expanded television program package and view selected programs through a menu-driven access scheme that allows each subscriber to select individual programs by sequencing a series of menus. The menus are sequenced by the subscriber using simple alpha-numeric and iconic character access or moving a cursor or highlight bar on the TV screen to access desired programs by simply pressing a single button, rather than recalling from memory and pressing the actual two or more digit numeric number assigned to a selection. Thus, with the press of a single button, the subscriber can advance from one menu to the next. In this fashion, the subscriber can sequence the menus and select a program from any given menu. The programs are grouped by category so that similar program offerings are found on the same menu.

2. Major System Components

[0076] In its most basic form, the system uses a program delivery system 200 in conjunction with a conventional concatenated cable television system 210. The program delivery system 200 generally includes (i) at least one operations center 202, where program packaging and control information are created and then assembled in the form of digital data, (ii) a digital compression system, where the digital data is compressed, combined/multiplexed, encoded, and mapped into digital signals for satellite transmission to the cable headend 208, and (iii) a set of in-home decompressors. The program delivery system 200 transports the digital signals to the cable headend 208 where the signals are transmitted through a concatenated cable television system 210. Within the cable headend 208, the received signals may be decoded, demultiplexed, managed by a local central distribution and switching mechanism, combined and then transmitted to the set top terminal 220 located in each subscriber's home over the cable system 210. Although concatenated cable systems 210 are the most prevalent transmission media to the home, telephone lines, cellular networks, fiberoptics, Personal Communication Networks and similar technology for transmitting to the home can be used interchangeably with this program delivery system 200.

[0077] The delivery system 200 has a reception region 207 with an in-home decompression capability. This capability is performed by a decompressor housed within a set top terminal 220 in each subscriber's home. The decompressor remains transparent from the subscriber's point of view and allows any of the compressed signals to be demultiplexed and individually extracted from the composite data stream and then individually decompressed upon selection by the subscriber. The decompressed video signals are converted into analog signals for television display. Such analog signals include NTSC formatted signals for use by a standard television. Control signals are likewise extracted and decompressed and then either executed immediately or placed in local storage such as a RAM. Multiple sets of decompression hardware may be used to decompress video and control signals. The set top terminal 220 may then overlay or combine different signals to form the desired display on the subscriber's television. Graphics on video or picture-on-picture are examples of such a display.

[0078] Although a single digital compression standard (e.g., MPEG) may be used for both the program delivery system 200 and the concatenated cable system 210, the compression technique used may differ between the two systems. When the compression standards differ between the two media, the signals received by the cable headend 208 must be decompressed before transmission from the headend 208 to the set top terminals 220. Subsequently, the cable headend 208 must recompress and transmit the signals to the set top terminal 220, which would then decompress the signals using a specific decompression algorithm.

[0079] The video signals and program control signals received by the set top terminal 220 correspond to specific television programs and menu selections that each subscriber may access through a subscriber interface. The subscriber interface is a device with buttons located on the set top terminal 220 or on a portable remote control 900. In the preferred system embodiment, the subscriber interface is a combined alpha-character, numeric and iconic remote control device 900, which provides direct or menu-driven program access. The preferred subscriber interface also contains cursor movement and go buttons as well as alpha, numeric and iconic buttons. This subscriber interface and menu arrangement enables the subscriber to sequence through menus by choosing from among several menu options

that are displayed on the television screen. In addition, a user may bypass several menu screens and immediately choose a program by selecting the appropriate alpha-character, numeric or iconic combinations on the subscriber interface. In the preferred embodiment, the set top terminal 220 generates the menus that are displayed on the television by creating arrays of particular menu templates, and the set top terminal 220 displays a specific menu or submenu option for each available video signal.

3. Operations Center and Digital Compression System

[0080] The operations center 202 performs two primary services, packaging television programs and generating the program control information signal. At the operations center 202, television programs are received from external program sources in both analog and digital form. Figure 2 shows an embodiment of the operations center receiving signals from various external sources 212. Examples of the external program sources are sporting events, children's programs, specialty channels, news or any other program source that can provide audio or visual signals. Once the programs are received from the external program sources, the operations center 202 digitizes (and preferably compresses) any program signals received in analog form. The operations center 202 may also maintain an internal storage of programs. The internally stored programs may be in analog or digital form and stored on permanent or volatile memory sources, including magnetic tape or RAM. Subsequent to receiving programming, the operations center 202 packages the programs into the groups and categories which provide the optimal marketing of the programs to subscribers. For example, the operations center 202 may package the same programs into different categories and menus for weekday, prime-time viewing and Saturday afternoon viewing. Also, the operations center 202 packages the television programs in a manner that enables both the various menus to easily represent the programs and the subscribers to easily access the programs through the menus.

[0081] The packaging of the digital signals is typically performed at the operations center 202 by computer assisted packaging equipment (CAP). The CAP system normally includes at least one computer monitor, keyboard, mouse, and standard video editing equipment. A programmer packages the signals by entering certain information into the CAP. This information includes the date, time slot, and program category of the various programs. The programmer and the CAP utilize demographic data and ratings in performing the packaging tasks. After the programmer selects the various programs from a pool of available programs and inputs the requisite information, the programmer, with assistance from the CAP, can select the price and allocate transponder space for the various programs. After the process is complete, the CAP displays draft menus or program schedules that correspond to the entries of the programmer. The CAP may also graphically display allocation of transponder space. The programmer may edit the menus and transponder allocation several times until satisfied with the programming schedule. During the editing, the programmer may direct the exact location of any program name on a menu with simple commands to the CAP.

[0082] The packaging process also accounts for any groupings by satellite transponder which are necessary. The operations center 202 may send different groups of programs to different cable headends 208 and/or set top terminals 220. One way the operations center 202 may accomplish this task is to send different program packages to each transponder. Each transponder, or set of transponders, then relays a specific program package to specific cable headends 208 and/or set top terminals 220. The allocation of transponder space is an important task performed by the operations center 202.

[0083] The operations center 202 may also "insert" directions for filling local available program time in the packaged signal to enable local cable and television companies to fill the program time with local advertising and/or local programming. Consequently, the local cable headends 208 are not constrained to show only programs transmitted from the operations center 202. New set top converters will incorporate both digital and analog channels. Therefore, the cable headend 208 may combine analog signals with the digital signals prior to transmitting the program signals to the set top terminals 220.

[0084] After the CAP packages the programs, it creates a program control information signal to be delivered with the program package to the cable headend 208 and/or set top terminal 220. The program control information signal contains a description of the contents of the program package, commands to be sent to the cable headend 208 and/or set top terminal 220, and other information relevant to the signal transmission.

[0085] In addition to packaging the signal, the operations center 202 employs digital compression techniques to increase existing satellite transponder capacity by at least a 4:1 ratio, resulting in a four-fold increase in program delivery capability. A number of digital compression algorithms currently exist which can achieve the resultant increase in capacity and improved signal quality desired for the system. The algorithms generally use one or more of three basic digital compression techniques: (1) within-frame (intraframe) compression, (2) frame-to-frame (interframe) compression, and (3) within carrier compression. Specifically, in the preferred embodiment, the MPEG 2 compression method is used. After digital compression, the signals are combined (multiplexed) and encoded. The combined signal is subsequently transmitted to various uplink sites 204.

[0086] There may be a single uplink site 204 or multiple uplink sites (represented by 204', shown in phantom in Figure

1) for each operation center 202. The uplink sites 204 may either be located in the same geographical place or may be located remotely from the operations center 202. Once the composite signal is transmitted to the uplink sites 204, the signal may be multiplexed with other signals, modulated, upconverted and amplified for transmission over satellite. Multiple cable headends 208 may receive such transmissions.

[0087] In addition to multiple uplinks, the delivery system 200 may also contain multiple operations centers. The preferred method for using multiple operations centers is to designate one of the operations centers as a master operations center and to designate the remaining operations centers as slave operations centers. In this configuration, the master operations center coordinates various functions among the slave operations centers such as synchronization of simultaneous transmissions and distributes the operations workload efficiently.

4. Cable Headend

[0088] After the operations center 202 has compressed and encoded the program signals and transmitted the signals to the satellite, the cable headend 208 receives and further processes the signals before they are relayed to each set top terminal 220. Each cable headend site is generally equipped with multiple satellite receiver dishes. Each dish is capable of handling multiple transponder signals from a single satellite and sometimes from multiple satellites.

[0089] As an intermediary between the set top terminals 220 and the operations center 202 (or other remote site), the cable headend 208 performs two primary functions. First, the cable headend 208 acts as a distribution center, or signal processor, by relaying the program signal to the set top terminal 220. In each subscriber's home. In addition, the cable headend 208 acts as a network controller 214 by receiving information from each set top terminal 220 and passing such information on to an information gathering site such as the operations center 202.

[0090] Figure 3 shows an embodiment where the cable headend 208 and the subscriber's home are linked by certain communications media 216. In this particular embodiment, analog signals, digitally compressed signals, other digital signals and up-stream/interactivity signals are sent and received over the media 216. The cable headend 208 provides such signaling capabilities in its dual roles as a signal processor 209 and network controller 214.

[0091] As a signal processor 209, the cable headend 208 prepares the program signals that are received by the cable headend 208 for transmission to each set top terminal 220. In the preferred system, the signal processor 209 re-routes or demultiplexes and recombines the signals and digital information received from the operations center 202 and allocates different portions of the signal to different frequency ranges. Cable headends 208 which offer different subscribers different program offerings may allocate the program signals from the operations center 202 in various manners to accommodate different viewers. The signal processor 209 may also incorporate local programming and/or local advertisements into the program signal and forward the revised signal to the set top terminals 220. To accommodate this local programming availability, the signal processor 209 must combine the local signal in digital or analog form with the operations center program signals. If the local cable system uses a compression standard that is different than the one used by the operations center 202, the signal processor 209 must also decompress and recompress incoming signals so they may be properly formatted for transmission to the set top terminals 220. This process becomes less important as standards develop (i.e., MPEG 2). In addition, the signal processor 209 performs any necessary signal decryption and/or encryption.

[0092] As a network controller 214, the cable headend 208 performs the system control functions for the system. The primary function of the network controller 214 is to manage the configuration of the set top terminals 220 and process signals received from the set top terminals 220. In the preferred embodiment, the network controller 214 monitors, among other things, automatic poll-back responses from the set top terminals 220 remotely located at each subscribers' home. The polling and automatic report-back cycle occurs frequently enough to allow the network controller 214 to maintain accurate account and billing information as well as monitor authorized channel access. In the simplest embodiment, information to be sent to the network controller 214 will be stored in RAM within each subscriber's set top terminal 220 and will be retrieved only upon polling by the network controller 214. Retrieval may, for example, occur on a daily, weekly or monthly basis. The network controller 214 allows the system to maintain complete information on all programs watched using a particular set top terminal 220.

[0093] The network controller 214 is also able to respond to the immediate needs of a set top terminal 220 by modifying a program control information signal received from the operations center 202. Therefore, the network controller 214 enables the delivery system to adapt to the specific requirements of individual set top terminals 220 when the requirements cannot be provided to the operations center 202 in advance. In other words, the network controller 214 is able to perform "on the fly programming" changes. With this capability, the network controller 214 can handle sophisticated local programming needs such as, for example, interactive television services, split screen video, and selection of different foreign languages for the same video. In addition, the network controller 214 controls and monitors all compressors and decompressors in the system.

[0094] The delivery system 200 and digital compression of the preferred embodiment provides a one-way path from the operations center 202 to the cable headend 208. Status and billing information is sent from the set top terminal

220 to the network controller 214 at the cable headend 208 and not directly to the operations center 202. Thus, program monitoring and selection control will take place only at the cable headend 208 by the local cable company and its decentralized network controllers 214 (i.e., decentralized relative to the operations center 202, which is central to the program delivery system 200). The local cable company will in turn be in communication with the operations center 202 or a regional control center (not shown) which accumulates return data from the set top terminal 220 for statistical or billing purposes. In alternative system embodiments, the operations center 202 and the statistical and billing sites are collocated. Further, telephone lines with modems are used to transfer information from the set top terminal 220 to the statistical and billing sites.

5. Set Top Terminal

[0095] The set top terminal 220 is the portion of the delivery system 200 that resides in the home of a subscriber. The set top terminal 220 is usually located above or below the subscriber's television, but it may be placed anywhere in or near the subscriber's home as long as it is within the range of the subscriber's remote control device 900. In some aspects, the set top terminal 220 may resemble converter boxes already used by many cable systems. For instance, each set top terminal 220 may include a variety of error detection, decryption, and coding techniques such as anti-taping encoding. However, it will become apparent from the discussion below that the set top terminal 220 is able to perform many functions that an ordinary converter box cannot perform.

[0096] The set top terminal 220 has a plurality of input and output ports to enable it to communicate with other local and remote devices. The set top terminal 220 has an input port that receives information from the cable headend 208. In addition, the unit has at least two output ports which provide communications from the set top terminal 220 to a television and a VCR. Certain menu selections may cause the set top terminal 220 to send control signals directly to the VCR to automatically program or operate the VCR. Also, the set top terminal 220 contains a phone jack which can be used for maintenance, trouble shooting, reprogramming and additional customer features. The set top terminal 220 may also contain stereo/audio output terminals and a satellite dish input port.

[0097] Functionally, the set top terminal 220 is the last component in the delivery system chain. The set top terminal 220 receives compressed program and control signals from the cable headend 208 (or, in some cases, directly from the operations center 202). After the set top terminal 220 receives the individually compressed program and control signals, the signals are demultiplexed, decompressed, converted to analog signals (if necessary) and either placed in local storage (from which the menu template may be created), executed immediately, or sent directly to the television screen.

[0098] After processing certain signals received from the cable headend 208, the set top terminal 220 is able to store menu templates for creating menus that are displayed on a subscriber's television by using an array of menu templates. Before a menu can be constructed, menu templates must be created and sent to the set top terminal 220 for storage. A microprocessor uses the control signals received from the operations center 202 or cable headend 208 to generate the menu templates for storage. Each menu template may be stored in volatile memory in the set top terminal 220. When the set top terminal receives template information it demultiplexes the program control signals received from the cable headend 208 into four primary parts: video, graphics, program logic and text. Each menu template represents a different portion of a whole menu, such as a menu background, television logo, cursor highlight overlay, or other miscellaneous components needed to build a menu. The menu templates may be deleted or altered using control signals received from the operations center 202 or cable headend 208.

[0099] Once the menu templates have been stored in memory, the set top terminal 220 can generate the appropriate menus. In the preferred embodiment, the basic menu format information is stored in memory located within the set top terminal 220 so that the microprocessor may locally access the information from the set top terminal instead of from an incoming signal. The microprocessor next generates the appropriate menus from the menu templates and the other menu information stored in memory. The set top terminal 220 then displays specific menus on the subscriber's television screen that correspond to the inputs the subscriber selects.

[0100] If the subscriber selects a specific program from a menu, the set top terminal 220 determines on which channel the program is being shown, demultiplexes and extracts the single channel transmitted from the cable headend 208. The set top terminal 220 then decompresses the channel and, if necessary, converts the program signal to an analog NTSC signal to enable the subscriber to view the selected program. The set top terminal 220 can be equipped to decompress more than one program signal, but this would unnecessarily add to the cost of the unit since a subscriber will generally only view one program at a time. However, two or three decompressors may be desirable to provide picture-on-picture capability, control signal decompression, enhanced channel switching or like features.

[0101] In addition to menu information, the set top terminal 220 may also store text transmitted from the cable headend 208 or the operations center 202. The text may inform the subscriber about upcoming events, billing and account status, new subscriptions, or other relevant information. The text will be stored in an appropriate memory location depending on the frequency and the duration of the use of the textual message.

[0102] Also, optional upgrades are available to enhance the performance of a subscriber's set top terminal 220. These upgrades may consist of a cartridge or computer card (not shown) that is inserted into an expansion slot in the set top terminal 220 or may consist of a feature offered by the cable headend 208 or operations center 202 to which the user may subscribe. Available upgrades may include on line data base services, interactive multi-media services, access to digital radio channels, and other services.

[0103] In the simplest embodiment, available converter boxes such as those manufactured by General Instruments or Scientific Atlanta, may be modified and upgraded to perform the functions of a set top terminal 220. The preferred upgrade is a circuit card with a microprocessor which is electronically connected to or inserted into the converter box.

6. Remote Control Device

[0104] The primary conduit for communication between the subscriber and the set top terminal 220 is through the subscriber interface, preferably a remote control device 900. Through this interface, the subscriber may select desired programming through the system's menu-driven scheme or by directly accessing a specific channel by entering the actual channel number. Using the interface, the subscriber can navigate through a series of informative program selection menus. By using menu-driven, iconic or alpha-character access, the subscriber can access desired programs by simply pressing a single button rather than recalling from memory and pressing the actual channel number to make a selection. The subscriber can access regular broadcast and basic cable television stations by using either the numeric keys on the remote control 900 (pressing the corresponding channel number), or one of the menu icon selection options.

[0105] In addition to enabling the subscriber to easily interact with the cable system 200, the physical characteristics of the subscriber interface 900 should also add to the user friendliness of the system. The remote control 900 should easily fit in the palm of the user's hand. The buttons of the preferred remote control 900 contain pictorial symbols that are easily identifiable by the subscriber. Also, buttons that perform similar functions may be color coordinated and consist of distinguishing textures to increase the user friendliness of the system.

7. Menu-Driven Program Selection

[0106] The menu-driven scheme provides the subscriber with one-step access to all major menus, ranging from hit movies to sport specials to specialty programs. From any of the major menus, the subscriber can in turn access submenus and minor menus by cursor or alpha-character access.

[0107] There are two different types of menus utilized by the preferred embodiment, the Program Selection menus and the During Program menus. The first series of menus, Program Selection menus, consists of an Introductory, a Home, Major menus, and Submenus. The second series of menus, During Program menus, consists of two primary types, Hidden menus and the Program Overlay menus.

[0108] Immediately after the subscriber turns on the set top terminal 220, the Introductory menu welcomes the subscriber to the system. The Introductory menu may display important announcements from the local cable franchise, advertisements from the cable provider, or other types of messages. In addition, the Introductory menu can inform the subscriber if the cable headend 208 has sent a personal message to the subscriber's particular set top terminal 220.

[0109] After the Introductory menu has been displayed the subscriber may advance to the next level of menus, namely the Home menu. In the preferred embodiment, after a certain period of time, the cable system will advance the subscriber by default to the Home menu. From the Home menu, the subscriber is able to access all of the programming options. The subscriber may either select a program directly by entering the appropriate channel number from the remote control 900, or the subscriber may sequence through incremental levels of menu options starting from the Home menu. The Home menu lists categories that correspond to the first level of menus called Major menus.

[0110] If the subscriber chooses to sequence through subsequent menus, the subscriber will be forwarded to the Major menu that corresponds to the chosen category from the Home menu. The Major menus further refine a subscriber's search and help guide the subscriber to the selection of his choice.

[0111] From the Major menus, the subscriber may access several submenus. From each submenu, the subscriber may access other submenus until the subscriber finds a desired television program. Similar to the Major menu, each successive level of Submenus further refines the subscriber's search. The system also enables the subscriber to skip certain menus or submenus and directly access a specific menu or television program by entering the appropriate commands on the remote control 900.

[0112] The During program menus (including Hidden Menus and Program Overlay Menus) are displayed by the set top terminal 220 only after the subscriber has selected a television program. In order to avoid disturbing the subscriber, the set top terminal 220 does not display the Hidden Menu until the subscriber selects the appropriate option to display a Hidden Menu. The Hidden Menus contain options that are relevant to the program selected by the viewer. For example, a Hidden Menu may contain options that enable a subscriber to enter an interactive mode or escape from the selected program.

[0113] Program Overlay Menus are similar to Hidden Menus because they occur during a program and are related to the program being viewed. However, the Program Overlay Menus are displayed concurrently with the program selected by the subscriber. Most Program Overlay Menus are small enough on the screen to allow the subscriber to continue viewing the selected program comfortably.

B. Detailed Set Top Terminal Description

[0114] The set top terminal 220 receives and manipulates signals from the cable headend 208. The set top terminal 220 is equipped with local computer memory and the capability of interpreting the digitally compressed signal to produce menus for the subscriber. The remote control 900 communicates the subscriber's selections to the set top terminal 220. The subscriber's selections are generally based upon menus or other prompts displayed on the television screen.

[0115] It is preferred that the signal reaches the subscriber's home in a compressed format and is decompressed prior to viewing. Included in the delivered program signal is information that enables equipment at the subscriber's home to display menus for choosing particular programs. Depending on the particular embodiment, the television program signal may arrive at the subscriber's home through one or more connections such as coaxial cables, fiber cables, twisted pairs, cellular telephone connections, or personal communications network (PCN) hookups.

[0116] The program control information signal is generated by the operations center 202 and provides the network controller 214 with data on the scheduling and description of programs. In an alternate configuration, this data is sent directly to the set top terminal 220 for display to the subscriber. In the preferred embodiment, the program control information signal is stored and modified by the network controller 214 and sent to the set top terminal 220 in the form of a set top terminal control information stream (STTCIS). The set top terminal 220 integrates either the program control information signal or the STTCIS with data stored in the memory of the set top terminal 220 to generate on-screen menus that assist the subscriber in choosing programs for display.

[0117] The types of information that can be sent using the program control signal include: number of program categories, names of program categories, what channels are assigned to a specific category (such as specialty channels), names of channels, names of programs on each channel, program start times, length of programs, description of programs, menu assignment for each program, pricing, whether there is a sample video clip for advertisement for the program, and any other program, menu or product information.

[0118] With a minimal amount of information being communicated to the set top terminal 220 on a regular basis, the set top terminal 220 is able to determine the proper menu location for each program and the proper time and channel to activate for the subscriber after a menu selection. The program control information signal and STTCIS can be formatted in a variety of ways and the on-screen menus can be produced using many different methods. For instance, if the program control information signal carries no menu format information, the menu format for creating the menus can be fixed in ROM at the set top terminal 220. In the preferred embodiment, the menu format information is stored at the set top terminal 220 in a temporary memory device such as a RAM or EPROM. New menu format information is sent via the program control information signal or the STTCIS to the set top terminals 200 whenever a change to a menu format is desired.

[0119] In the simplest embodiment, the menu formats remain fixed and only the text changes. In this way the program control information signal can be limited to primarily text and a text generator can be employed in the set top terminal 220. Another simple embodiment uses a separate channel full-time (large bandwidth) just for the menu information.

[0120] Live video signals may be used in windows of certain menus. These video signals can be transmitted using the program control information signal or STTCIS, or can be taken off channels being transmitted simultaneously with the menu display. Video for menus, promos or demos may be sent to the set top terminal 220 in several formats, including (1) on a dedicated channel, (2) on a regular program channel and scaled to size, or (3) along with the program control information signal. However, in the preferred embodiment, a large number of short promos or demo video is sent using a split screen technique on a dedicated channel. A multiple window technique may be used with the menus to display a description of a program and one or more video frames that assist the subscriber in selecting the program.

[0121] Figure 4 shows the basic hardware components of the set top terminal 220. The set top terminal 220 has a tuner 603, digital demodulator 606, decryptor 600, and demultiplexers 609, 616 as well as audio equipment 612 and a remote control interface 626 for receiving and processing signals from the remote control unit 900. An optional modem 627 allows communication between a microprocessor 602 and the cable headend 208. An NTSC encoder 625 provides a standard NTSC video output.

[0122] The microprocessor 602 is capable of executing program instructions stored in memory. These instructions allow a user to access various menus by making selections on the remote control 900.

[0123] The manner in which the video is decompressed and the menus are generated from the program control information signal or STTCIS varies depending on the specific embodiment of the invention. Video decompressors 618 and 622 may be used if the video is compressed. The program control information signal may be demultiplexed into its component parts, and a video decompressor 618, graphic decompressor, text generator and video combiner

624 may be used to assist in creating the menus.

[0124] In addition to the menu format information that is stored in graphics memory, the set top terminal 220 also stores data, tracking those programs that have been selected for viewing. By gathering this data, the set top terminal 220 can maintain an accurate record of all programs accessed/watched by storing the data in EEPROM or RAM. Subsequently, this data can be transmitted to the cable headend 208, where it can be used in carrying out network control and monitoring functions. Such data transmissions between the set top terminal 220 and cable headend 208 can be accomplished, for example, through upstream transmission over the cable network or over telephone lines through the use of telephone modems. Where upstream transmission over the cable network is used, the set top terminals 220 can complete data transmissions on a scheduled (e.g., using a polling response or status report to respond to polling requests sent from the cable headend 208) or as-needed (e.g., using a random access technique) basis.

[0125] Figure 5a shows the front panel of the set top terminal 220, which includes an infrared sensor 630 and a series of LED displays 640. The LED displays 640 may indicate with an icon or a letter (e.g. A-K) the major menu currently selected by the set top terminal 220 or the channels selected directly by a user, or menu channel selections (e.g., from 1 to 50). Further displays may include current channel, time, volume level, sleep time, parental lock (security), account balance, use of a hardware upgrade, second channel being recorded by VCR, use of the Level D music hardware upgrade in a separate room, and any other displays useful to a subscriber to indicate the current status of the set top terminal 220. The LEDs 640 may also provide an indication of the digital audio channel currently tuned.

[0126] The set top terminal 220 includes a flapped opening 635 on its front that allows the insertion of a magnetic cartridge (or similar portable storage device, including optical disk, ROM, EPROM, etc. not shown). This cartridge opening 635 allows the set top terminal 220 to be upgraded or reprogrammed locally with the use of a magnetic tape cartridge.

[0127] On the top or cover of the set top terminal 220 are located pushbutton controls 645. Any function that can be performed on the remote 900 may also be performed at the set top terminal 220 using the duplicative pushbutton controls 645.

[0128] Figure 5b shows the back of the set top terminal 220, which includes a pair of output terminals 650, pair of input terminals 652, pair of stereo/audio output terminals 654, satellite dish input port 656, telephone jack 658 and an RS-422 port 660. In addition, an upgrade port 662 and a cover plate 664 are held in place by a series of sheet metal screws. One of the output terminals 650 is for a television and the other is for a VCR. The set top terminal 220 is equipped to handle incoming signals on one or two cables using the input terminals 652. The phone jack 658 and an RS-232 or RS-422 port 660 are provided for maintenance, trouble shooting, reprogramming and additional customer features. In alternate embodiments, the telephone jack 658 may be used as the primary mode of communication between the cable headend 208 and the set top terminal 220. This connection is possible through the local telephone, cellular telephone or a personal communications network (PCN).

[0129] The basic programming of each set top terminal 220 is located on ROM within the set top terminal 220. Random access memory, the magnetic cartridge capability, and the expansion card slot 635 each allow upgrades and changes to be easily made to the set top terminal 220.

[0130] In the preferred embodiment, the set top terminal 220 includes a hardware upgrade port 662, in addition to expansion card slots. The hardware upgrade port 662 accommodates a four-wire (or more) connection for: (1) error corrected, decrypted data output of the set top terminal 220, (2) a control interface, (3) decompressed video output, and (4) a video input port. In the preferred embodiment, multiple wires are used to perform each of the four functions. The four sets of wires are combined in a single cable with a single multipin connector.

[0131] In the preferred embodiment, multipin connections may be used for the multiwire cable. The multipin connection 662 may range from DB9 to DB25. A variety of small computer systems interface (SCSI) ports may also be provided. Alternatively, four or more ports may be provided instead of the single port depicted.

[0132] Another port 662 is used to attach the various hardware upgrades described below to a set top terminal 220. The preferred embodiment has a number of hardware upgrades available for use with a set top terminal 220, including: (1) a Level A interactive unit, (2) a Level B interactive unit, (3) a Level C interactive unit with compact disc capability, (4) a Level D digital radio tuner for separate room use, and (5) a Level E information download unit. Each of these upgrades may be connected to the set top terminal 220 unit through the upgrade port 662 described earlier. The same four wires in a single cable described earlier may be used.

[0133] Existing set top converter boxes such as those made by Scientific Atlanta or General Instruments are presently unequipped to handle the menu selection system of the present invention. Thus, hardware modifications are necessary in order to use the menu selection system with existing set top converter technology.

[0134] A Turbo Card addition to a set top converter is depicted in Figure 6. The Turbo Card 700 shown provides the additional functionality needed to utilize the menu system with existing set top converter technology. The primary functions the Turbo Card 700 adds to the set top converter are the interpreting of program control information signals, generating of menus, sequencing of menus, and, ultimately, the ability of the viewer to select a channel through the

menu system without entering any channel identifying information. The turbo card also provides a method for a remote location, such as the cable headend 208, to receive information on programs watched and control the operation of the set top converter and Turbo Card 700. The programs watched information and control commands may be passed from the cable headend 208 to the Turbo Card 700 using telephone lines.

[0135] The primary components of the Turbo Card 700 are a PC chip CPU 702, a VGA graphic controller 704, a video combiner 706, logic circuitry 708, NTSC encoder 710, a receiver 712, demodulator 714, and a dialer 716. The Turbo Card 700 operates by receiving the program control information signal from the cable headend 208 through the coaxial cable. The logic circuitry 708 of the Turbo Card 700 receives data, infrared commands, and synchronization signals from the set top converter. Menu selections made by the viewer on the remote control 900 are received by the set top converter's IR equipment and passed through to the Turbo Card 700. The Turbo Card 700 interprets the IR signal and determines the program (or menu) the viewer has selected. The Turbo Card 700 modifies the IR command to send the program selection information to the set top converter 221. The modified IR command contains the channel information needed by the set top converter. Using the phone line and dialer 716, the Turbo Card 700 is able to transmit program access information to the cable headend 208.

[0136] In the preferred embodiment, program access information, that is what programs the viewer watched, is stored at each set top terminal 220 until it is polled by the network controller 214 using a polling request message format as shown in Figure 7a. This frame format 920 consists of six fields, namely: (1) a leading flag 922 at the beginning of the message, (2) an address field 924, (3) a subscriber region designation 926, (4) a set top terminal identifier 928 that includes a polling command/response (or P/F) bit 930, (5) an information field 932, and (6) a trailing flag 934 at the end of the message. Figure 7b shows a response frame format 920' (similar to the frame format 920 end, therefore, commonly numbered with the frame depicted in Figure 7a, but with the prime indicator added for clarity) for information communicated by the set top terminal 220 to the network controller 214 in response to the polling request of Figure 7a.

[0137] The eight-bit flag sequence 922 that appears at the beginning and end of a frame is used to establish and maintain synchronization. Such a sequence typically consists of a "01111110" bit-stream. The address field 924 designates a 4-bit address for a given set top terminal 220. The subscriber region designation 926 is a 4-bit field that indicates the geographical region in which the subscriber's set top terminal 220 is housed. The set top terminal identifier 928 is a 16-bit field that uniquely identifies each set top terminal 220 with a 15-bit designation followed by an appended P/F bit 930. Although field size is provided by this example, a variety of sizes can be used with the present invention.

[0138] The P/F bit 930 is used to command a polling response from the set top terminal 220 addressed, as described below. The response frame format 920' also provides a variable-length information field 932' for other data transmissions, such as information on system updates. The frame format 920' ends with an 8-bit flag (or trailing flag) 934' that is identical in format to the leading flag 922', as set forth above. Other frame formats (e.g., MPEG) will be apparent to one skilled in the art and can be easily adapted for use with the system.

[0139] As summarized above, images or programs may be selected for display by sequencing through a series of menus. Figure 8 is an example of one possible structure for a series of menus. Generally, the sequence of menus is structured with an introductory menu, a home menu, various major menus and a multitude of submenus. The submenus can include promo menus and during program menus. For example, at the home menu portion of the sequence of menus and corresponding software routines, a subscriber may select one of the major menus and start a sequence of menu displays. Alternatively, a subscriber may go directly to a major menu by depressing a menu select button on remote control 900.

[0140] At any time during the menu sequence, the subscriber may depress a major menu button to move into another series of menus. In this way, a subscriber may move from major menu to major menu.

[0141] The various software subroutines executed by the microprocessor 602 allow a subscriber to sequence the menus, navigating through the various menus of the present invention. A subscriber may sequence back through menus or return to the home menu with a single touch of the home menu button on remote 900.

[0142] An introductory menu screen 1000 automatically appears upon power-up and Initialization of the set top terminal 220. From this introductory menu screen 1000, the set top terminal software will normally advance the subscriber to the home menu screen 1010. The home menu 1010 is the basic menu that the subscriber will return to in order to make the first level of viewing decisions. When the set top terminal software is displaying the home menu 1010, the subscriber is able to access any television programming option. The software allows programming options to be entered through cursor movement on the screen and directly by button selection on the remote control 900.

[0143] In the normal progression through the menu screens, the software will forward the subscriber to a major menu screen 1020 in response to the subscriber's remote control 900 selection or highlighted cursor selection from the home menu screen 1010. The selections displayed on the home menu 1010 are for large categories of programming options.

[0144] Following the major menu 1020, the subscriber may navigate through one or more submenu screens 1050 from which the subscriber may choose one particular program for viewing. For most programming selections, the user will proceed from the home menu 1010 to a major menu 1020 and then to one or more submenus 1050. However, for certain programming options or functions of the set top terminal 220, the user may skip one or more menus in the

sequence.

[0145] The During Program Menus 1200 are submenus enabled by the set top terminal software only after the subscriber has selected a television program. These menus provide the subscriber with additional functionality and/or additional information while viewing a selected program. The During Program Menus 1200 sequence can be further subdivided into at least two types of menus, Hidden Menu 1380 and Program Overlay Menu 1390.

[0146] To avoid disturbing a subscriber during viewing of a program, the Hidden Menu 1380 are not shown to the subscriber but instead "reside" at the set top terminal 220 microprocessor 602. The microprocessor 602 awaits a button entry either from the remote control 900 or set top terminal 220 buttons before executing or displaying any Hidden Menu 1380 options. The set top terminal software provides the subscriber with additional functions such as entering an interactive mode or escaping from a selected program through use of Hidden Menu 1380.

[0147] Program Overlay Menu 1390 are similar to Hidden Menu 1380. However, the Program Overlay Menu 1390 are overlayed onto portions of the displayed video and not hidden. The software for the Program Overlay Menu 1390 allows the subscriber to continue to watch the selected television program with audio but places graphical information on a portion of the television screen. Most Program Overlay Menu 1390 are graphically generated to cover small portions of video. Some Overlays 1390 which are by their nature more important than the program being viewed will overlay onto greater portions of the video. Examples of types of overlay menus 1390 include Notification Menu 1392 and Confirmation Menu 1394. In the preferred embodiment, the software for the Program Overlay Menu 1390 controls the reduction or scales down the (entire) programs video and redirects the video to a portion of the screen.

[0148] Submenus provide the cost of viewing the program and the program's length in hours and minutes. From the submenu, the subscriber is given at least three options: (1) to purchase a program, (2) to return to the previous menu, and (3) to press "go" and return to regular TV. The subscriber may also be given other options such as previewing the program.

[0149] Using an on-screen menu approach to program selection, there is nearly an unlimited number of menus that can be shown to the subscriber. The memory capability of the set top terminal 220 and the quantity of information that is sent using the program control information signal are the only limits on the number of menus and amount of information that can be displayed to the subscriber. The approach of using a series of menus in a simple tree sequence is both easy for the subscriber to use and simply implemented by the set top terminal 220 and remote control device 900 with cursor movement. A user interface software programmer will find many obvious variations from the preferred embodiment described.

[0150] The set top terminal 220 generates and creates menus using, in part, information stored in its graphics memory. A background graphics file 800 will store menu backgrounds and a logo graphics file will store any necessary logos. A menu display and cursor graphics file will store menu display blocks and cursor highlight overlays as well as any other miscellaneous files needed to build the menus. Using this method of storing menus, the menus can be changed by reprogramming the graphics memory of the set top terminal 220 through instructions from either the network controller 214 or operations center 202.

[0151] The microprocessor 602 performs the steps required to create a menu using stored information. The microprocessor 602 fetches a background file, logo file, menu display and cursor file in most instances. The microprocessor 602 fetches text from long-term, intermediate-term, or short-term storage depending on where the text is stored. Using a video combiner (or like device), the stored information is combined with video and the entire image is sent to the television screen for display.

[0152] In the preferred embodiment, a graphics controller is used to assist the set top terminal 220 in generating menus. Menu generation by the set top terminal 220 begins with the building of a major menu screen, which includes background graphics for that major menu. The background graphics may include an upper sash across the top of the screen and a lower sash across the bottom of the screen. The background graphics may be generated from the background graphics file 800 in the memory files of the graphics memory (preferably EEPROM). In addition, logo graphics may be generated. Such graphics typically include an icon window, a cable company logo, a channel company logo, and two "go" buttons.

[0153] Preferably, the text for each major menu is generated separately by a text generator in the set top terminal 220. Those portions of the text that generally remain the same for a period of weeks or months may be stored in EEPROM or other local storage. Text which changes on a regular basis, such as the movie titles (or other program selections), is transmitted to the set top terminal 220 by either the operations center 202 or the network controller 214 of the cable headend 208. In this manner, the cable headend 208 may change the program selections available on any major menu 1020 by modifying the program control information signal sent by the operations center 202 and transmitting any changes using the STTCIS.

[0154] Day, date and time information are added to each major menu. This information is sent from the operations center 202, the cable headend 208 (signal processor 209 or network controller 214), the uplink site, or generated by the set top terminal 220 internally.

[0155] The creation and display of program description submenus is performed by the set top terminal 220 in a

manner similar to that described above. Each submenu may be created in parts and combined before being sent to the television screen. Preferably, background graphics and upper and lower sashes are used. Likewise, a video window and half-strip window can be generated from information in storage on the EEPROM.

[0156] In addition to graphics and text, some submenus include windows that show video. Such video may be still or moving pictures. Still pictures may be stored in a compressed format (such as JPEG) at the set top terminal 220. Video stills may be transmitted by the operations center 202 through the program control information signal from time to time.

[0157] Moving video picture is obtained directly from a current video feed as described above. Depending on video window size, this may require manipulation of the video signal, including scaling down the size of the video and redirecting the video to the portion of the menu screen which is within the video window of the menu. Alternatively, the video may be obtained from a split screen channel. Such a method involves the use of split screen video techniques to send multiple video clips on a single channel at a given time. The set top terminal 220 would scale the picture, if necessary, and redirect it to the correct position on the screen using known scaling and positioning techniques. Additional circuitry may be required in the set top terminal 220 to perform adequate scaling and repositioning.

[0158] To avoid the need for redirecting video into the portion of the screen which houses the video window, masking and menu graphics may be used to cover the portions of the channel video that are not needed. This masking technique allows the split screen video to remain in the same portion of the screen that it is transmitted by the operations center 202. The masking is then adjusted to cover the undesired portions of the screen. These masks are stored in the background graphics file similarly to other background files for menus.

[0159] The split screen video technique may also be used for promoting television programming. Since a great number of short video clips may be sent continuously, full or partial screen promotionals (or informationals) may be provided to the subscriber. With this large quantity of promotional video, the subscriber is given the opportunity to "graze" through new movie or television programming selections. The subscriber simply grazes from promotional video to promotional video until the desired television program is discovered.

C. Detailed Description of Advanced Set Top Terminal

1. Overview

[0160] The present invention relates to advances in the set top terminal 220 described above. In particular, the present invention may be achieved through a set of hardware upgrades or additions to the following embodiments: (1) an existing set top converter (not shown) upgraded with a Turbo Card 700 or the like; (2) an industry standard digital decompression converter box (as shown in Figures 9a and 9b below) upgradeable by either an upgrade module or a menu generation card; or (3) a set top terminal 200 capable of both decompression and menu generation. The set of hardware upgrades described below can be used to provide additional advanced features and functional capabilities to any of these embodiments.

[0161] Table A shows several exemplary hardware configurations that may be used to achieve the goals of the present invention. In particular, Table A shows four columns of set top converter technology, which may be modified to produce the various set top capabilities shown in the three rows of the table.

TABLE A

	Existing Analog Set Top Converter	Set Top Converter With Digital Decompression Capability	Set Top Converter With Digital Decompression and Menu Generation Capabilities	Advanced Set Top Terminal
Decompression Capability	N/A	Built-In	Built-In	Built-In
Menu Generation Capability	Turbo Card	Upgrade Module or Menu Generation Card	Built-In	Built-In
Advanced Features	Level A-C Hardware Upgrades or Expansion Card	Level A-E Hardware Upgrades or Expansion Card	Level A-E Hardware Upgrades or Expansion Card	Built-In

[0162] The table shows the various inherent functional capabilities of each set top converter, and how each may be modified or upgraded, if necessary, to achieve the objectives of the present invention. From left to right, the columns of the table span the various alternatives for balancing those capabilities that may be built into set top converters or terminals, on the one hand, and those capabilities that can be provided through, for example, an upgrade module, expansion card or hardware upgrade of the present invention, on the other. This balance allows a designer or manufacturer of set top converters to choose between adding advanced functionality to an existing converter box or, instead, producing a converter with additional built-in features that increase cost and complexity of the converter or terminal.

[0163] The first column of Table A shows how an existing analog set top converter can be modified to provide menu generation capability through the use of the Turbo Card. In addition to the Turbo Card, such an existing analog set top converter may be further modified to provide any of the advanced features described below through the use of the Level A, Level B and Level C hardware upgrades or an expansion card. Such existing set top converter boxes are currently manufactured by Scientific Atlanta and General Instruments, among others. These converter boxes have been designed for use with analog waveforms and, as a result, digital decompression capabilities are not applicable.

[0164] The second column of Table A shows a set top converter with digital decompression capability. This converter is a simple decompression box which may eventually become the industry standard. The simple decompression boxes may be modified to provide the enhanced functionality of the present invention. For example, a simple decompression box may be modified to produce menu generation capability through the use of an upgrade module or menu generation card. In addition, other advanced features may be added to a simple decompression box through modifications that include any of the Level A through E hardware upgrades or an expansion card. Each of these modifications are described below.

[0165] The third column of Table A shows a set top converter that has built-in digital decompression and menu generation capabilities. Thus, in order to achieve the enhanced functionality of the present invention, other advanced features may be provided through hardware modification. Such modification may be accomplished through the use of any of the Level A through E hardware upgrades or the expansion card, as explained below.

[0166] The fourth column of Table A shows an advanced set top terminal having decompression, menu generation, and advanced functional capabilities. Each of these capabilities are built in to the terminal itself. In this way, achieving the enhanced performance of the set top terminal in accordance with the present invention would require no hardware modification.

[0167] In the preferred embodiment, the advanced set top terminal 220 of the present invention has the capability, among other things, of receiving tiered programming from the network controller. Tiered programming allows different users to view different video even though the subscribers are "tuned" to the same channel. For example, the network controller 214 may know the demographics of its subscribers through a database, by "learning" from prior subscriber choices, from an interactive selection, or from other means. Using the demographics information, the network controller 214 may target commercials to the correct audience by showing different commercials to subscribers with different demographics. Even though subscribers will believe they are "tuned" to one channel, each subscriber will be switched to a different channel for the tiered video. Alternatively, subscribers may be offered an option of several commercials from which to choose.

[0168] To accommodate foreign speaking subscribers, multiple audio channels for television programming may be provided. In this way, the subscriber may be shown menus of programs available in the subscriber's native language. The function of choosing the correct audio to correspond to the selected language may be handled by either the set top terminal 220 or the network controller 214 depending upon the configuration. Local programming in several languages or additional audio channels for a foreign language translation of a popular television program may be provided by the network controller 214. Using a picture-on-picture feature, sign language may be similarly made available to certain set top terminals 220 for the deaf. Also, a text overlay may easily be produced on the lower part of the screen for the deaf.

[0169] Typically, each video signal is received at the set top terminal 220 along with four audio channels. Two of these audio channels will preferably be used for left and right stereo audio reception of the video signal being displayed. The remaining two audio signals may be used for alternative languages. For example, where a video signal is received by the set top terminal 220, two of the audio channels will provide the stereo audio signals for that video in English, with the other two audio channels providing mono audio signals in French and Spanish. In this way, each video signal received at the set top terminal 220 can accommodate at least two foreign languages. Where stereo audio channels are not desired, the audio channels in English can be set to a single signal, providing mono audio reception, and increasing the multiple language audio channel capability to three foreign languages.

[0170] In other embodiments, the network controller 214 can act as a central computer and provide intra-set top terminal interactive games, inter-set top terminal interactive games, computer bulletin board type services, message services (Electronic mail) etc. For example, a subscriber may play war games with five (anonymous) fellow subscribers each in their own home each operating a separate tank. The network controller 214 gathers the players via set top terminal 220 communications and acts as the referee. A bulletin board or message system can be set up to discuss a

particular program such as "Twin Peaks Whodunit" for enthusiasts. These interactive features are further described below with the interactive services level B menu and the set top terminal hardware upgrade level B interactive unit.

[0171] In order to achieve the required throughput of video and audio information for the system, digital compression techniques for video are employed. As a result, the set top terminal 220 typically must decompress any digitally compressed program signals that it receives. Methods of decompression are a function of the compression technique used in the program delivery system.

[0172] There are three basic digital compression techniques: within-frame (intraframe), frame-to-frame (interframe), and within-carrier compression. Various compression methods may be used with these techniques. Such methods of compression, which include vector quantization and discrete cosine transform methodologies, are known to those skilled in the art.

[0173] Several standard digital formats representing both digitizing standards and compression standards have also been developed. For example, JPEG (joint photographic experts group) is a standard for single picture digitization. Motion picture digitization may be represented by standards such as MPEG or MPEG 2 (motion picture engineering group specification). In addition to these standards, other proprietary standards have been developed. Although MPEG and MPEG 2 for motion pictures are preferred in the present invention, any reliable digital format with compression may be used.

[0174] Various hybrids of the above compression techniques and methods have been developed by several companies including AT&T, Compression Labs, Inc., General Instruments, Scientific-Atlanta, Philips, and Zenith. Any of the compression techniques developed by these companies, as well as other techniques known to those skilled in the art, may be used with the present invention.

2. Advanced Set Top Terminal Major Components and Upgrades

a. Decompression Box with Upgrade Module

[0175] The preferred program delivery system uses digitally compressed signals and, as a result, the preferred subscriber equipment configuration must be capable of decompressing and processing such digitally compressed signals. Figure 9a diagrams the basic interplay between an upgrade module 700 and a simple decompression box 302. The upgrade module 300 can be connected to the decompression box 302 through a port similar to the upgrade port 662 described above (Figure 5b). The simple decompression box 302 shown is preferably a future industry standard decompression box capable of communicating with an upgrade module 300 to enhance functionality.

[0176] The upgrade module 300 provides menu generation capability to the simple decompression box 302. The microprocessor of the simple decompression box 302 communicates with the microprocessor in the upgrade module 300 to provide the full functionality of a set top terminal 220.

[0177] In the preferred embodiment, multipin connections may be used for a multiwire cable connecting the simple decompression box 302 with the upgrade module 300. The multipin connection may range from DB9 to DB25. A SCSI, or small computer systems interface, port (not shown) may also be provided. Alternatively, four or more ports may be provided instead of the single port depicted. If a port is not provided, the upgrade module may, alternatively, be hardwired to the simple decompression box 302.

[0178] As represented generally at 304, the digital data set of output wires of the simple decompression box 302 will preferably output error corrected and decrypted data to the upgrade module 300. The second set of wires, providing the interface connection, allows the microprocessor in the upgrade module 300 to communicate with the microprocessor of the simple decompression box 302. In this manner, the video circuitry of the upgrade module 300 and the simple decompression box 302 may maintain synchronization. The third set of wires, providing the decompressed video output, provide the upgrade module 300 with a decompressed video signal to manipulate. The fourth set of wires, comprising the video input set, allows the simple decompression box 302 to accept a video signal that is a combined text, graphics, and video signal.

[0179] Figure 9a further shows the CATV input 306, video input 308, and video and audio outputs 310, 312, as part of the simple decompression box 302. This embodiment reduces the component cost of upgrade module 300, and thus, is preferred. The upgrade module 300 may simply be a cartridge (not shown) insertable into the simple decompression box 302. Alternatively, as shown in commonly numbered Figure 9b, the CATV input 306, video input 308 and video and audio outputs 310, 312 may be included as part of the upgrade module 300. In this embodiment, the simple decompression box 302 is primarily used for decompressing the video.

[0180] Referring to Figure 10, the upgrade module 300 preferably includes the following circuitry: a video graphics and text demultiplexer 314; a text and graphics video plane combiner 316; a run length graphics decompressor 318; and, a run length compressed graphics memory 320 (nonvolatile RAM, ROM, EPROM, or EEPROM). By means of communications through the multiwire connection between the upgrade module 300 and the simple decompression box 302, compressed video and control signals may be demultiplexed by the demultiplexer 314 within the upgrade

module 300. The run length graphics decompressor 318, through communications with the run length compressed graphics RAM 320, permits decompression of the input compressed video signal. The text and graphics video plane combiner 316 allows demultiplexed and decompressed signals to be output, through the simple decompression box 302, to a subscriber's television 222 showing both video and overlay menus with text.

[0181] Figure 10 shows the elements of a simple decompression box 302 (numbered commonly with the elements of the set top terminal 220 depicted in Figure 4) with the upgrade module 300 described above. Generated menus and video are combined in the combiner 316 and output to an antitaping encoder 619. Any method of antitaping encoding known by those skilled in the art may be used with the present invention.

[0182] Figure 10 also depicts an expansion card 320 and an expansion card interface 320 for receiving the card 320. In addition, error correction circuitry 324 is shown receiving the demodulated signal, prior to demultiplexing the signal.

[0183] The enhanced functionality of the upgrade module 300 may alternatively be included on the expansion card 320. In this embodiment, the upgrade module 300 becomes an internal component of the simple decompression box 302 and internally upgrades the box 302 to include menu generation capability without using an external hardware upgrade module 300. Other variations in the upgrade module 300 configuration are also possible.

b. Upstream Data Transmission Hardware

[0184] Figure 11 shows a preferred set top terminal 220 that includes a data receiver 332 and a data transmitter 344. The data transmitter 344 provides upstream data communications capability between the set top terminal 220 and the cable headend 208. Upstream data transmissions are accomplished using the polling system described with reference to Figures 7a and 7b above, and, in particular, using a data transmitter 344. Both receiver 332 and transmitter 344 may be built into the set top terminal 220 itself or added through an upgrade module 300. Regardless of the specific hardware configuration, the set top terminal's data transmission capabilities may be accomplished using the hardware shown in Figure 11.

[0185] Figure 11 shows RF signals, depicted at 330, being received at by a data receiver 332 and tuner 603 working in unison. Both of these devices are interfaced with the microprocessor 602, which receives inputs, depicted at 338, from the subscriber, either through the set top terminal's keypad 645 or remote control unit 900. All cable signals intended for reception on the subscriber's TV are accessed by the tuner 603 and subsequently processed by the processing circuitry 340. This processing circuitry 340 typically includes additional components for descrambling, demodulation, volume control and remodulation on a Channel 3 or 4 TV carrier.

[0186] Data targeted to individual set top terminals 220 is received by the data receiver 332 according to each set top terminal's specific address or ID (e.g. set top ID 928, 928'). In this way, each addressable set top terminal 220 only receives its own data. The data receiver 332 may receive set top terminal specific data in the information field of the program control information signal frame described with reference to Figure 7a or on a separate data carrier located at a convenient frequency in the incoming spectrum.

[0187] Any received data includes information regarding channels and programs available for selection. The subscriber may enter a series of commands using the keypad 645 or remote control 900 in order to choose a channel or program. Upon receipt of such commands, the set top terminal's microprocessor 602 instructs the tuner 603 to tune to the proper frequency of the channel or program desired and subsequently instructs the processing circuitry 340 to begin descrambling of this channel or program.

[0188] Upon selection of a channel or program, the microprocessor 602 stores any selection information in local memory for later data transmission back to the cable headend 208. Typically, the data transmitter 344 operates in the return frequency band between 5 and 30 MHz. In an alternative embodiment, the frequency band of 10 to 15 MHz may be used. Regardless, however, of the frequency band used, the data transmitter 344 sends information to the cable headend 208 or network controller 214 in the information field of the frame described with reference to figure 7b. Those skilled in the art will recognize that a number of variations and combinations of the above-described set top terminal 220 hardware components may be used to accomplish upstream data transmissions.

c. Hardware Upgrades

[0189] In order to enhance a set top terminal's 220 functionality, the following hardware upgrades may be used:

- (1) a Level A interactive unit, (2) a Level B interactive unit.
- (3) a Level C interactive unit with compact disc capability.
- (4) a Level D digital radio tuner for separate room use, and
- (5) a Level E information download unit. Each of these upgrades is connected to the set top terminal 220 unit through the upgrade port 662 described earlier.

[0190] Level A, B and C hardware upgrades have similar hardware components. Figure 12a diagrams the basic components of the Level A, B and C hardware upgrades, indicated generally at 100. The figure diagrams the interaction between the hardware upgrades 100 and the set top terminal's 220 basic components. As seen in the figure, CATV input signals are received by the set top terminal 220 using a tuner 603 and various receiver components described above (but denoted generally at 601 in Figures 12a and 12b). The set top terminal's microprocessor coordinates all CATV signal reception and also interacts with various upstream data transmission components 604, which have been described above.

[0191] The Level A, B and C hardware upgrades 100 each include a microprocessor 104, interactive software 106, processing circuitry 108, bubble memory 112, and a long-term memory device 116. In addition to these basic components, the Level B hardware upgrade makes use of an additional telephone modem 120, while the Level C hardware upgrade makes use of an additional CD-ROM storage device 122.

[0192] Along with their basic components, the Level A, B and C hardware upgrades 100 each use their own interactive software 106. This software may be used to provide the enhanced functional capabilities described below. The Level A, B and C hardware upgrades also make use of processing circuitry 108, which allows the set top terminal 220 to pass the subscriber's interactive input to the Level A, B and C hardware upgrades 100 for interpretation. These commands are passed through the interface linking the set top terminal's microprocessor with the microprocessor of the Level A, B and C hardware upgrades 100. In this way, subscriber inputs, entered through the set top terminal keypad or remote control, can be transferred to any of the hardware upgrades for processing and responses generated therein can then be sent back to the set top terminal 220 for display. In the preferred embodiment the IR commands are transferred from set top terminal to hardware upgrade.

[0193] The Level A, B and C hardware upgrades 100 also include a long-term memory component or device 116 that allows each hardware upgrade to internally store data used with each interactive service. Such data may include, for example, customized menu templates used by the individual interactive services. In addition, the Level A, B and C hardware upgrades include a bubble memory 112 for the temporary storage of, for example, interactive questions and responses used in each particular interactive service.

[0194] The Level A interactive unit allows the subscriber to access interactive services offering additional information about programs such as quizzes, geographical facts, etc. This information may be received by the set top terminal 220 in several data formats, including using the vertical blanking interval (VBI) or the program control information signal. The Level A interactive unit enables the subscriber to engage in textual interactivity with the current television program using overlay menus. Some examples are quizzes, fast facts, more info, where in the world, products, etc, all of which provide the subscriber with an interactive question and answer capability. Although the Level A interactive capability can easily be built into the set top terminal 220, such an embodiment increases the cost of the basic set top terminal 220.

[0195] The Level B interactive unit provides the user with access to online data base services for applications such as home shopping, airline reservations, news, financial services, classified advertising, home banking, and interactive teletext services. For example, with this upgrade, a user will be able to reserve plane tickets or buy consumer electronics. The primary feature of this upgrade unit is that it allows actual transactions using two-way communications over modem with outside services. This added two-way communications capability may be with the cable headend 208 or, alternatively, over cellular networks, PCN or other communications media.

[0196] The Level C interactive unit employs a high volume local storage capacity, including compact disc or other random access digital data formats (e.g., CD-ROM 122). This unit allows use of interactive multi-media applications. Such applications include, for example, computer games, multi-media educational software, encyclopedias, other reference volumes (e.g. Shakespeare library), etc. In the preferred embodiment, many of these applications will interact with live programming providing additional information and interactivity to the basic program feed. For example, a viewer watching a show set in a foreign country may be able to retrieve additional information, maps, economic data, as well as other information about that country that are stored on the compact disc. In the Level C applications, the upgrade hardware may closely monitor the television broadcast through additional data channels (e.g., vertical blanking interval, or other digital data encoded within live video) providing context sensitive interactivity.

[0197] Figure 12b diagrams the interaction between the set top terminal 220 and the Level D hardware upgrade, indicated generally at 130. As shown in the figure, the CATV signals are input to the set top terminal 220 through its tuner 603 and receiver components 601. As described above, the microprocessor 602 coordinates all cable television signal reception by the set top terminal 220. The Level D hardware upgrade 130 makes use of a microprocessor 132, a tuner 134, a demodulator 136, a demultiplexer 138, a decryptor 140 and an audio decompressor 142.

[0198] As shown in the figure, the set top terminal 220 and the Level D hardware upgrade 130 interact through the interface linking the respective devices. The set top terminal's microprocessor 602 instructs received signals to be transferred to the Level D hardware upgrade 130 for further processing. These received signals are input to the Level D hardware upgrade, passed through the signal path comprising the tuner 134 and other digital audio reception components (i.e., demodulator 136, demultiplexer 138, decryptor 140 and audio decompressor 142). Through the use of the hardware as configured in Figure 12b, the subscriber can select a digital audio program for listening. The subscriber

can accomplish such selection through a subscriber interface (not shown), which may exist at the set top terminal 220 or, alternatively, at the Level D hardware upgrade.

[0199] The Level D hardware upgrade allows the subscriber separate access to the digital radio channels while other programming (not necessarily radio) is being viewed on the television. Typically, this upgrade would be used for digital radio usage in a separate room from that of the television. The upgrade has a separate tuner, decompressor, and visual display. In the preferred embodiment a second remote control (which is preferably a scaled-down version of the set top terminal remote control, described below) is provided to access the digital audio system. This remote is equipped with a display.

[0200] The Level E hardware upgrade allows the subscriber to download large volumes of information from the operations center 202 or cable headend 208. The Level E hardware upgrade will enable subscribers to download data, such as books and magazines, to local storage. Primarily, the Level E hardware upgrade is an additional local storage unit (e.g., hard disk, floppy, optical disk or magnetic cartridge). Preferably, a small portable reader, called "Every-Book™", is also provided with the upgrade to enable downloaded text to be read without the use of a TV. The portable reader is equipped with a screen.

[0201] The downloadable information may be text or video supplied by the operations center 202 or cable headend 208. With this upgrade, books may be downloaded and read anywhere with the portable reader. Using this upgrade, video may be downloaded and stored in compressed form for later decompression. The video would be decompressed only at the time of viewing. Important text that the public desires immediate access may be made available through this system. Text such as the President's speech, a new law, or a recent abortion decision rendered by the Supreme Court may be made immediately available.

[0202] Using a more sophisticated port, such as the SCSI port, multiple hardware upgrade units may be connected, or "daisy-chained" together, to operate simultaneously. Although these upgrade units are described separately, the units may be combined or built into the set top terminal 220. Those skilled in the art will recognize variations on such combinations of and additions to the set top terminal hardware.

d. Expansion Card Slot

[0203] In order to provide the greatest flexibility possible and prevent a set top terminal 220 from becoming outdated during the terminal's useful life, additional electronic expansion card slots have been built into the preferred embodiment. The expansion slots 665 (depicted in phantom in Figure 5b) are covered by the metal plate cover 664 as shown in Figure 5b. It is anticipated that additional memory or capabilities may be needed for certain customer features and also to update the system as the cable delivery system's capabilities increase.

[0204] In addition to providing an additional memory capability, the expansion card slot provides an easy method to upgrade the set top terminal hardware. In particular, expansion cards can be used to internally provide any of the Level A through E hardware upgrade features described above. Such embodiments, however, use the upstream data transmission hardware, also described above (or built-in modem).

[0205] Functionally, the expansion card (not shown) may be inserted into an expansion card slot 665, causing the connector on the expansion card to electrically link with a connector on the set top terminal 220. Preferably, the frame of the set top terminal has a shelf or rack position to hold the expansion card. The connector on the set top terminal 220 may simply be an electrical connection to the set top terminal's microprocessor and/or memory device or devices. Alternatively, the interface between the expansion card and the set top terminal 220 may be an electrical bus that allows the memory resources of the set top terminal 220 to be directly expanded. In this case, the expansion card itself contains a memory device or devices that expand the amount of program information or data that the set top terminal 220 may access. Such memory devices include RAM, ROM, EPROM or EEPROM. In addition, the interface may be a "mailbox," which resides in the set top terminal 220 as a single memory location. This embodiment facilitates the transfer of data between the set top terminal 220 and the expansion card in either serial or parallel format. Such transfers are coordinated and controlled by the set top terminal's microprocessor 602.

[0206] The use of expansion cards lowers the cost of the set top terminal 220 itself, while also increasing its potential functionality. Thus, an expansion card may include enhanced functional capabilities described as part of the upgrade module discussion above and be designed to accommodate any hardware upgrade compatible with the set top terminal 220.

3. Remote Control and Subscriber Access of Set Top Terminal

[0207] The subscriber can access programs televised by the system through the set top terminal 220 using a remote control 900. Figure 13a shows a two-section remote control 900 that accommodates such access. To reduce costs and make the set top terminal 220 as user friendly as possible, a standard television remote control 350, such as a Jerrold RC 650 remote control or the like, may be augmented by adding a new section 352 that provides the additional

digital menu access and ordering functions. Figure 13a depicts the addition of menu access and cursor movement control to the remote control 900.

[0208] The remote control 900 has an ordering button 354 and four-way cursor movement 356 that includes a "go" button 358 and menu access buttons 360. The preferred remote control 900 operates using infrared (IR) signals, with the signals being received by the infrared (IR) sensor 630 on the front of the set top terminal 220.

[0209] In the simplest embodiment, the remote 900, may be built with only cursor movement and a go button. In more sophisticated embodiments, the remote control 900 may be provided with buttons that are programmable to perform specific functions for a series of entries. An intelligent or smart remote control 900 would increase both the cost and capability of the set top terminal 220 system. Using the augmented remote control 900 depicted in Figure 13a, a subscriber can navigate the program menu system of the set top terminal 220.

[0210] Figure 13b shows an alternative and preferred embodiment of the remote control 900 for use in the present invention. Standard television receiver remote control switches or buttons 362 may be used, including volume control, channel select, power and signal source buttons, as well as other menu buttons 364, including cursor movement, cursor select, menu select, and pay television buttons arranged longitudinally on the remote control 900, as opposed to the width-wise separation, as shown in Figure 13a. The color of the buttons or the surrounding background may differ between the standard television remote control buttons 362 and the menu buttons 264 to differentiate visually between these two groups of buttons.

[0211] The width and depth of the remote control unit 900 are considerably less than the length to allow the remote control unit 900 to fit easily within a user's palm. The remote control unit 900 preferably has its center of mass balanced substantially near the longitudinal middle. This balance allows a user's thumb to naturally be placed in substantially the middle portion of the remote control unit 900, when it is picked up by a user.

[0212] Since the center of mass of the remote control unit 900 is placed substantially near the longitudinal middle of the remote control unit 900 (thereby having a user's thumb naturally fall in this same center region), the standard remote buttons 362 and menu access switches or buttons 364 most frequently accessed and depressed by a user are placed in the central region of the remote control unit 900 within easy reach of the user's thumb. Channel and volume increment and decrement buttons 366 are placed near this center of mass and longitudinal center line. The channel buttons 366 are preferably beveled in opposing directions to allow a user to feel for and press a desired button without looking down at remote 900. Similarly, the volume buttons 368 are preferably beveled in opposing directions for the same reason. Additionally, the channel buttons 366 could have a surface texture different from those of the volume buttons 368 to allow even easier differentiation.

[0213] Also placed in the longitudinal center, within easy reach of a user's thumb, are cursor movement buttons 370 and a "go" button 372. The "go" button 372 selects an option corresponding to the placement of the cursor. As opposed to buttons, a joystick may be used with a selection on the stick, or a trackball, depressible for selecting a desired choice. The cursor buttons 370 are placed ninety degrees apart, with the "go" button 372 placed within the center of the cursor movement buttons 370, as shown in Figure 13b. The cursor movement buttons 370 are preferably beveled inwardly toward the "go" button 372 and the "go" button 372 is recessed below the level of the cursor movement buttons 370 so that it is not accidentally pressed while depressing the cursor movement buttons 370. In addition to the beveling on the cursor movement buttons 370, these buttons may also have a surface texture to allow a user to feel for and select the appropriate button without looking down at the remote 900 and directional arrows could be raised or recessed on the surface of the cursor movement buttons 370 for this same purpose.

[0214] Menu select buttons 374 are placed near buttons 370 as shown in Figure 13b. Menu select buttons 374 are preferably the largest buttons on the remote control unit 900. Menu select buttons 374 preferably have icons or other graphics imprinted on their top surface or adjacent to corresponding buttons. For example, a button for the sports major menu may contain a baseball icon. The icons represent the programming available on the particular major menu selected by the menu select buttons 374. The icons may also be raised above the level of the menu select buttons to provide a textured surface. This textured surface would allow a user to select an appropriate menu button 374 by feel, without looking at the remote control unit 900. The icons would require substantial differences in texture, while still providing a meaningful graphic related to the associated menu.

[0215] As shown in Figure 13b, labels and icons are provided for the following major menus: movies, sports, children's programming, documentary/news, entertainment, magazines, programming guide, HDTV (high definition television), interactive TV, music, and an additional button 376 for further programming. Menu select buttons 374 may also be labeled A through J for the above programs, with the last button for all additional major menus labeled K-Z.

[0216] Although the remote control unit 900 is described with a variety of channel selection buttons, nearly all buttons from a standard remote control (section 362 buttons) could be eliminated. The present invention would allow a subscriber to use a remote control unit 900 containing only menu select buttons 374 and/or cursor movement and select buttons, 370, 374, respectively.

[0217] As used herein, "button" is contemplated to include all manner of switches or touch sensitive circuitry to activate a particular function in the remote control unit 900. Additionally, although the remote control unit 900 commu-

nicates with the set top box by means of infrared transmission, other forms of communication are contemplated, including ultra-sound, radio frequency and other electromagnetic frequency communication.

4. Advanced Features and Functional Capabilities

a. Overview

[0218] In the preferred embodiment, the set top terminal 220 will include features that are now being adopted in the industry, including parental controls and locks, electronic diagnostics and error detection, muting, on-screen volume control, sleep timer, recall of last selection, etc. Each of these features has a corresponding menu (or overlay menu) that allows on-screen customizing and activation of the feature.

[0219] The preferred set top terminal 220 also supports a number of advanced features and functional capabilities. This set top terminal 220 provides subscribers with a picture-on-picture capability without requiring a special television to support the capability. The set top terminal 220 also supports a program catalogue Service, which provides subscribers with information on all programming available at its particular subscriber location. The set top terminal 220 further includes the capability of querying viewers to establish, among other things, favorite channel lists, personal profile data and mood information. The set top terminal 220 allows the subscriber to view promotional menus on future programming events.

[0220] The set top terminal 220 supports additional capabilities using its hardware upgrades that allow subscribers to use other interactive services, for example, to engage in on-line question and answer sessions, to order and confirm airline tickets, and to access a variety of other data services. The set top terminal 220 makes use of a digital tuner as a hardware upgrade to provide subscribers with a digital audio capability.

[0221] The preferred set top terminal 220 may be used to control video tape machines, thereby simplifying the recording of programs. The set top terminal 220 can, in conjunction with the program delivery system, easily support high definition television (HDTV). For subscribers living in remote locations, the set top terminal 220 accommodates backyard satellite systems.

[0222] In addition to all the features that the set top terminal 220 supports with its current internal programming and upgradeability, additional features may be added or existing features increased through remote reprogramming of the set top terminal 220. Utilizing the resident operating system on the read only memory (ROM), the cable headend 208 is able to reprogram the random access memory (RAM) of the set top terminal 220. With this capability, the cable headend 208 can remotely upgrade software on the set top terminals 220.

[0223] Reprogramming will occur by using the program control information signal, with the appropriate signals sent over this signal. In an alternative embodiment, one channel is dedicated for the special programming needs. When reprogramming is to occur, the cable head end will send an interruption sequence on the program control information channel that informs the set top terminal 220 that reprogramming information is to follow.

b. Picture-On-Picture Capability

[0224] Although the preferred embodiment of the present invention decompresses one channel at a time for the viewer, users who desire a picture-on-picture capability can be provided with a set top terminal 220 have upgraded hardware components that allow two channels to be tuned and decompressed at any given time. Once two signals are available, the picture-on-picture capability can be made fully available in the set top terminal 220, without requiring a special television.

[0225] Figure 15 diagrams one embodiment for implementing the picture-on-picture capability. Such implementation necessarily requires the use of two tuners 603, 603' and two decompressors 618, 618' so that two separate video programs may be displayed simultaneously on the subscriber's television screen. As shown in the figure, the CATV input signal is received by the set top terminal 220 and input into two separate tuners. These tuners will each tune to a separate television program, both of which will be simultaneously displayed on the subscriber's television. The two television programs are extracted from the CATV input signal by the two parallel signals paths depicted in Figure 15.

[0226] Each signal path is substantially identical (therefore the components thereof are commonly numbered, with callout numbers of the components of one path carrying the prime indicator) and thus, only one path will be described. Each signal path shown includes a tuner 603, a demodulator 606, a demultiplexor 609, a decryptor 600 and various decompression devices. As the respective signals pass through these devices, the microprocessor 602 coordinates the signal processing to produce a decrypted program signal. The decrypted program signal is further partitioned between audio, on the one hand, and video, graphics and text, on the other. The audio signals extracted are passed to an audio decompressor 612, which further processes the audio for output to the subscriber's television.

[0227] The embodiment diagramed in Figure 15 shows only single audio channels for each video channel tuned by the individual tuners. As described above, the number of audio channels will typically include four audio signals cor-

responding to a single video channel. At least two of these audio signals may be used for stereo television play. Although the subscriber can view two separate video pictures simultaneously through the picture-on-picture capability, the subscriber's television can only accommodate a single audio signal at a time (or two audio signals for stereo audio reception). Thus, the set top terminal hardware shown in Figure 15 must also include a switch (not shown), which accommodates the simple switching between each audio signal or signals that correspond to one video picture or another. Such an audio switch, which is a component well known in the art, allows the subscriber to listen to the audio of one picture or the other. The video, graphics and text portion of the program signal are routed through another demultiplexor 314, which, in turn, separates all video, graphics and text of the signals. These signal parts are stored in a memory device 620 within the set top terminal 220. This memory device may be a ROM, RAM, EPROM, or EEPROM.

[0228] The microprocessor 602 initiates and coordinates further decompression of the video, graphics and text for each of the program signals. Once these signal parts are decompressed within the set top terminal 220, these components are passed to a video combiner 316. The video combiner correlates and combines the video, graphics and text of the two program signals. The video combiner outputs these two signals for display on the subscriber's television. These signals may also pass through an NTSC encoder 625 to produce analog NTSC video waveforms, which may likewise be displayed on the subscriber's television. Such display necessarily requires that each signal pass through an RF modulator 605 in order to be input into a television. In this way, two separate RF video outputs are produced. Each video signal produced by the RF modulators has its own corresponding audio outputs produced by each audio decompressor.

[0229] Each video signal (and its corresponding audio signal) produced by the two tuner configuration can be simultaneously displayed on the subscriber's television, which has a picture-on-picture capability, or, alternatively, the set top terminal 220 itself can create the picture-on-picture image for display. Such display involves the scaling and repositioning of one of the video (and audio) signals so that both pictures produced can be viewed simultaneously. In so doing, the subscriber's television can display one of the pictures as a full screen display, with the other picture being displayed as a scaled and repositioned display overlayed on the full screen display. To implement such a technique, the set top terminal 220 must include the hardware components necessary to produce a picture-on-picture capability, including hardware capable of scaling, repositioning and overlaying images. Such an advanced set top terminal 220 allows the subscriber to make use of a picture-on-picture capability even though the subscriber's television cannot alone produce such a result.

c. Program Catalogue Service

[0230] Referring to Figure 15 and to Figure 8, in the preferred embodiment of the present invention, program catalogue menu 1100 listing programs available on network schedules, will be available as a major menu of the type shown as 1020. In the preferred embodiment, the major program catalogue menu 1100 would offer submenus, such as network schedules for the next seven days, today's network schedules for the next six hours, and TV program catalogue picks for the next seven days.

[0231] In order for the set top terminal 220 to provide a program catalogue service, the set top terminal 220 must receive information on all programming available at its particular subscriber location. This information will be sent to each set top terminal 220 as part of the program control information signal or STTCIS. The program control information signal would include, among other things, all programming scheduled for the next 7 days. This programming information would, for example, include the name of each program, the type of program, the program start time, the length of the program, the date the program will be shown, a brief description of the program and whether or not the program is closed-captioned, among other information.

[0232] All programming information sent to the set top terminal 220 for use with the program catalogue service will be stored in the set top terminal's internal memory. Upon selection of the program catalogue service by the subscriber, the microprocessor accesses the memory device during its menu generation and creation process. In this way, the programming information will be combined with the program catalogue menu or submenu template to produce the Program catalogue service. The program catalogue service may involve the use of more than one menu, especially where the network scheduling information covers time frames longer than a few days.

[0233] If the particular set top terminal 220 has been subscribed to the program catalogue service, the subscriber may proceed to a submenu showing schedules of programs. If the subscriber chooses the network schedule submenu 1102, he is offered a list of network schedules to choose from. If a subscriber were to choose, for instance, HBO, an HBO-specific submenu (not shown) would appear and allow a subscriber to choose a date of interest to see what programs are available on that particular date.

d. Querying Viewer

[0234] To support a variety of services, the set top terminal 220 is capable of querying the viewer and recording

viewer responses. For example, in order for the set top terminal 220 to establish a favorite channel list as shown at 1100 in Figure 16a depicting the broadcast TV menu 1112, menus querying the subscriber and allowing the subscriber to input his selection of eight favorite channels is displayed.

[0235] After querying the subscriber for a list of popular shows the terminal displays a submenu allowing the subscriber to choose one of the subscriber's favorite or popular shows for viewing. Although various embodiments of menus are possible, the goals of each are the same -- to eliminate or augment printed guides to television programs. In an alternative embodiment, a program viewing suggestion feature is available as an additional feature. This feature gives the indecisive or lazy viewer suggestions as to which programs the viewer should watch. The set top terminal 220 uses a matching algorithm to accomplish this program suggestion feature. This program suggestion feature is described in detail in EP-A-0 673 582.

[0236] In order for the set top terminal 220 to make decisions on which programs the subscriber should watch, the terminal must create a personal profile for the particular viewer. From the data in the particular viewer's personal profile and the television program information available in the program control information signal, the set top terminal 220 is able to select a group of programs which the particular viewer is most likely to watch.

[0237] In order for this feature to operate, a personal profile for each viewer can be gathered by the set top terminal 220 and stored in a memory file. The personal profile consists of demographic information that may be gathered in a number of ways. The set top terminal 220 builds the personal profile for each viewer and stores the information in a memory file by viewer name. To build a personal profile in the preferred system, the viewer answers a series of questions presented on a series of menu screens. These personal profile screens request the viewer to input information such as name, sex, age, place of birth, place of lower school education, employment type, level of education, amount of television program viewing per week, and the number of shows in particular categories that the viewer watches in a given week such as, sports, movies, documentaries, sitcoms, etc. Any demographic information which will assist the set top terminal 220 in targeting advertisements to the viewer or suggesting programs may be used.

[0238] Once a personal profile has been created (in a particular set top terminal 220), it can be indefinitely stored in nonvolatile memory. A selection at the home menu screen 1010 (Figure 8) activates the program selection feature. Following activation of the feature, the set top terminal 220 will present the viewer with a series of brief questions to determine the viewer's mood at that particular time, as shown in Figure 16b. For example, the first mood question screen 1114 may ask the viewer to select whether the viewer desires a short (30 minute), medium (30-60 minute), or long (60 plus minute) program selection. The second mood question screen 1116 requests the viewer to select between a serious program, a thoughtful program, or a light program, as shown in Figure 16c. And the third mood question screen 1118 requests whether the user desires a passive program or an active program, as shown in Figure 16d. The viewer makes a selection in each question menu, utilizing the cursor movement keys and "go" button on the remote control unit 900.

[0239] After the viewer has responded to the mood question menus which determine his mood, the set top terminal 220 uses the personal profile information and mood information to find the best programming matches for the viewer. The set top terminal 220 displays an offering of several suggested programs to the viewer. With this program selection feature, the set top terminal 220 can intelligently assist the specific viewer in selecting a television program.

[0240] The personal profile information may also be used in targeting advertisements. In the preferred embodiment, the network controller 214 can target specific advertisements to individual cable distribution network nodes or, alternatively, to individual subscribers. In order to accomplish the advertisement targeting capability, the network controller 214 transmits packages of advertisements to the cable distribution network nodes or subscribers for eventual display on the set top terminal 220. When the video that the subscriber is watching nears a break for a commercial, a specific advertisement or set of advertisements is specifically targeted to a particular set top terminal 220 based on the personal profile information described above. Although the network controller 214 is the component in the program delivery system which provides this targeting capability, the set top terminal 220 accommodates transparent channel switches to display the targeted advertisement. In this way, although the subscriber thinks that the set top terminal 220 is tuned to a specific channel, an advertisement from another channel is displayed on the subscriber's television.

[0241] The hardware required to accommodate such transparent channel switching capabilities are shown in Figures 17a and 17b. Figure 17a shows the set top terminal hardware components which accommodate channel switching within a single 6 MHz channel bandwidth. These components include a tuner 603, a demodulator 606, a demultiplexer 609, a multiplexer 400, a decompressor 622, a microprocessor 602, and local memory M. The tuner 603 operates by tuning to a specific 6 MHz bandwidth which includes the displayed video and a number of channels carrying advertisements. The demodulator 606 processes these signals and sends them to the demultiplexer 609, which converts the received signal into separate program and advertisement signals. During this processing, the microprocessor 602 coordinates the demultiplexing of the programming signals. Once the video signal pauses for a commercial break, the microprocessor 602 instructs the multiplexer 400 to select the advertisement or advertisements for decompression and subsequent display on the subscriber's television. This hardware configuration allows the set top terminal 220 to switch between channels within the 6 MHz bandwidth and display various advertisements for viewing, regardless of

the video currently being watched by the subscriber.

[0242] Where a targeted advertisement falls outside the tuned 6 MHz bandwidth containing the video that the subscriber is currently watching, the hardware configuration shown in Figure 17b is used. In this configuration, the microprocessor 602 instructs the tuner 603 to retune to another 6 MHz channel bandwidth, as represented by bi-directional arrow A.

[0243] Working together, the microprocessor 602 and tuner 603 allow targeted advertisements, which have been transmitted in another 6 MHz bandwidth, to be tuned with minimal acquisition time and delay. In particular, this configuration allows the set top terminal 220 to tune outside a given 6 MHz bandwidth (to another 6 MHz bandwidth) in order to select a targeted advertisement for display. This alternative embodiment may require the use of a full screen mask in order to minimize any annoying screen rolling during the tuning process. The masking is intended to cover any glitches which would otherwise be displayed during the acquisition time (e.g., 0.5 seconds) for retuning to another 6 MHz channel bandwidth.

[0244] Where the acquisition time or delay becomes unreasonable, an alternative embodiment (not depicted) can include the use of two tuners similar to the configuration used above for the picture-on-picture capability. This alternative configuration using two tuners trades an increased cost for lower acquisition times. Those skilled in the art will recognize a number of other configurations of set top terminal hardware that will accommodate a transparent channel switching feature. A more detailed description of target advertising and channel switching is provided in EPA-0 673 579.

e. Promotional Menus

[0245] Figure 18 depicts the use of a promotional menu 1120 used to sell subscriptions to services in the system 200. This promotional menu is tailored to Level B interactive services which include a variety of on-line type services such as Prodigy, Yellow Pages, Airline Reservations, etc. A similar menu is used for Level A interactive services that offers subscribers additional information about programs such as quizzes, geographical facts, etc. Such information may be received by the set top terminal 220 in several data formats, including in the vertical blanking interval (VBI) and in the program control information signal.

[0246] Other promotion menus similar to menu 1120 may be used for the Level C interactive services. The Level C interactive services utilize local storage such as CD technology (e.g., 122) to offer an enormous range of multi-media experiences. The Level C interactive services require a hardware upgrade as described earlier. Specially adopted CD-I and CD-ROM 122 units are used for this service.

[0247] Typically, promotional menus may be generated when a subscriber selects a nonexistent channel, creating a virtual channel. Such virtual channels do not require any additional bandwidth since these channels do not carry any of the data required to create a promotional menu. Instead, when the subscriber selects a channel that does not exist (e.g., Channel 166), a virtual channel is created using data sent to the set top terminal in a number of ways. For example, the data may be sent in the vertical blanking interval (VBI) of another channel, out-of-band, or with the menu information sent from the headend 208 in the set top terminal control information stream (STTCIS). The data will be used to create graphics stored locally at the set top terminal 220 as an NTSC video signal which may be displayed on the subscriber's television. In this way, a promotional menu may be drawn and a virtual channel is created. This capability simply provides the set top terminal 220 with the ability to display a promotional menu or graphics display whenever a nonexistent channel is selected by the subscriber.

f. Other Interactive Services

[0248] Figures 19a and 19b show menus (1130 and 1132, respectively) that are available using the interactive Level A services. Referring to Figure 19a, when interactive Levels A services are available for a television program, the system will display an interactive logo 1134 consisting of the letter -r and two arrows with semicircular tails. In the preferred embodiment, the set top terminal 220 will place the interactive logo on the television screen as an overlay menu. In the preferred embodiment, the set top terminal 220 will detect that there is data or information available about a television program which can be displayed to a subscriber using the interactive service. When the set top terminal 220 senses that there is interactive information available, it will generate the interactive logo overlay menu 1134 and place it on the television screen. For example, the set top terminal 220 will detect that information on a television program is being sent in the vertical blanking interval (VBI) and generate an interactive logo overlay menu 1134 which will appear on the subscriber's television screen for approximately fifteen seconds during each ten minute interval of programming. Similarly, the set top terminal 220 can sense that the programming has closed caption information available and place a closed caption logo on the screen.

[0249] Referring to Figure 19b, when the subscriber sees the interactive logo 1134 on the television screen, the subscriber is made aware of the fact that interactive services are available in conjunction with his television program. If the subscriber presses the interactive remote control button, another overlay menu 1133 will be generated by the

set top terminal 220 and placed on the screen. This overlay menu 1133 is shown in Figure 19b being overlaid on an interactive television program. From this menu 1133, the subscriber may select a variety of different types of textual interactivity with the current television program, as at 1134, including quizzes, fast facts, more info, where in the world, products, etc. At any time during the interactive submenus, the user may return to the television program without interactive features.

[0250] Another submenu 1136 gives additional information related to the television program to the viewer in textual form in the lower half of the screen. In Figure 19b, the submenu 1136 shows the available interactive options for the subcategory "quiz." In this interactive subcategory, the user is presented with questions and a series of possible answers. If the subscriber desires, the subscriber selects one of the answers to the quiz question. After the selection, the set top terminal 220 sequences to another menu. The set top terminal 220 sequences to the interactive quiz answers submenu which informs the subscriber whether the correct answer was or was not chosen. Subsequently, another submenu would show correctly or incorrectly answered quiz question.

[0251] Figure 20a is an example of a submenu for Level B interactive services. From this menu screen 1141, any of a number of on-line data services could be accessed. One service, the airline reservations selection 1142, has been chosen by the subscriber on this menu.

[0252] In selecting airline reservations, the subscriber encounters a sequence of menus as for any on-line data service. Referring to Figure 20b, the subscriber is typically shown a submenu, such as submenu 1144, for the data service offering various options. In each of these submenus related to a data service, the subscriber is able to exit, returning to the home menu 1010 or regular cable TV.

[0253] Figure 20b, the airline information and reservation submenu 1144, allows a subscriber to view six available flights. A subscriber may select one of the flights to check on its availability. Another similar submenu allows a subscriber to enter the month, day and year for the availability date desired. In this submenu, the subscriber is offered the option of correcting any errors in the entered information.

[0254] Figure 20c is another airline submenu 1150 that allows a subscriber to view remaining seats available on a flight, enabling the selection of a seat assignment. This interactive submenu 1150 is an example of how information may be graphically shown to a subscriber using a portion of the menu and different coloring schemes. In this interactive menu, the lower half of the screen 1152 shows the passenger compartment of an airplane with all the seat locations graphically represented by square blocks. By coloring the available seat locations in blue and the unavailable seat locations in a different color, the menu can present a great deal of information in a limited amount of space. This graphic presentation of information for the interactive on-line data services is an important method of visually displaying large amounts of information to the subscriber.

[0255] Referring to Figure 20d, another submenu 1156 allows the subscriber to choose a one-way or round-trip ticket, to confirm reservations and to charge an airline ticket by credit card, choosing the appropriate strip menu on the lower part of the screen. In this particular menu 1156, the subscriber is charging a round-trip plane ticket on a credit card. The subscriber simply needs to enter the credit card number, expiration date, and credit card type to charge an airline ticket. Other submenus may process the subscriber's credit card charge for the airline ticket, confirm the subscriber's airline ticket purchase, and pass this information to the location where the ticket is printed.

[0256] Using the methods and hardware described, a variety of interactive services are possible. Those skilled in the art will recognize that such interactive services may be accommodated by the preferred set top terminal 220.

g. Caller ID

[0257] Using the capability of the set top terminal and a connected modem, the set top terminal is able to perform the function of caller ID. The caller ID function of the set top terminal assists the viewer in a manner similar to the caller ID function provided by telephone companies. However, the set top terminal is able to use the television as its display means to communicate to the viewer information about incoming telephone calls. Also, the strong local processing capability of the set top terminal allows the caller ID function to be much more user friendly-and convenient.

[0258] If the set top terminal senses that a viewer is using the system and watching television, then the caller ID feature would automatically be activated. When the caller ID function is active, the set top terminal software will monitor incoming telephone calls to the viewer through the modem. After the set top terminal senses that the phone is ringing, signals are received on the tip and ring lines of the telephone, the system will immediately look for incoming telephone data identifying the telephone number from which the telephone call was initiated.

[0259] Upon receiving the telephone number from which the call was initiated, the preferred embodiment of the caller ID compares the telephone number with a list of telephone numbers stored in memory. The list of telephone numbers stored in memory is cross referenced to a list of names, other textual data or graphics. When the set top terminal finds a match between the telephone number and a number stored in memory, the corresponding text or graphics are displayed on the television screen. For example, "GRANDMA" and a "smiley face" graphic can be flashed across the television screen using an overlay menu.

[0260] In this manner the viewer may see the name (and identifying icon graphics) of the person placing the call and can decide whether to activate an automatic telephone message recording system or answer the telephone call. After generating an overlay menu, the set top terminal software awaits an IR command signifying a viewer response. With the simple depression of a button on the remote control, the viewer can instruct the set top terminal to send an activation signal to the automatic telephone message system (through a set top terminal port). Thus, the viewer can continue to watch a program and know the identity of a caller without taking his or her eyes off the television. If a dumb telephone message system is used, the viewer can simply allow the telephone to ring the requisite number of rings until the telephone answering machine normally activates and answers the call.

[0261] In an alternative embodiment, having no stored telephone numbers, the set top terminal may just flash the incoming telephone number on the screen using an overlay menu. In a more sophisticated embodiment, a microphone is provided in the set top terminal or remote control unit. Using the television's speakers, a remote control, and a microphone, the viewer is able to answer the telephone using the keys of the remote control without taking his or her eyes off the television screen.

h. Digital Audio Capability

[0262] Referring to Figure 21, the digital audio feature of the invention allows a subscriber to listen to CD quality audio selections through the subscriber's stereo (not shown). This can be accomplished by running cables directly from the set top terminal 220 (which may include a Level D hardware upgrade) to the subscriber's amplifier/stereo system. Alternatively, the subscriber may listen to audio selections through the subscriber's television system.

[0263] In the preferred embodiment, the digital audio feature uses a Level D hardware upgrade as a digital radio tuner. This Level D hardware upgrade enables a subscriber to use the program delivery system's digital audio signaling capability. Digital audio transmissions require much less bandwidth than that used for the transmission of a digital video signals. Thus, hundreds of digital audio programs are delivered to each set top terminal 220 in limited segments of bandwidth.

[0264] Where digital audio programs are delivered to the set top terminal 220, the Level D upgrade (shown in Figure 13b) provides the subscriber with the means to select a given digital audio program for listening. The Level D hardware upgrade makes use of a tuner 603 that is separate from the tuner 603 used by the set top terminal 220 for video display. The digital audio signal is received at the set top terminal 220 over the CATV transmission media. The set top terminal 220, in turn, routes the digital audio signal to the components of the Level D hardware upgrade. These components may include: a tuner 603, demodulator 606, demultiplexer 609, decryptor, decompressor 622, remote control interface and microprocessor 602.

[0265] The Level D hardware upgrade will use its tuner 603 to tune to the specific digital audio program selected by the subscriber and subsequently demodulate, demultiplex and decrypt the digital audio signal. Upon completion of this processing, the digital audio signal will be decompressed to produce a processed digital audio signal ready to be output to the subscriber's stereo or directly to speakers.

[0266] The Level D hardware upgrade includes ports for the digital audio signal output, which provide the necessary connections for transmission of the signal from the Level D hardware upgrade to the subscriber's stereo. In addition, the Level D hardware upgrade include a small LED display that can show the channel number of the program selected, date and time, among other display fields.

[0267] The Level D hardware upgrade can be physically located in a different room from that of the television and set top terminal 220. Thus, the Level D hardware upgrade will have its own remote control device (not shown), albeit with less available options and keys than the set top terminal's remote control 900 described above. This Level D hardware upgrade remote control is more limited than the set top terminal's remote control 900 since the Level D remote control will be used exclusively for digital audio program selection. This limited remote control, nevertheless, includes a small LED or LCD display that is used to display the channel number of the digital audio program selected. Alternatively, the set top terminal's remote control may be programmed for use with the Level D hardware upgrade so that an additional remote control is not required to use the digital audio feature.

[0268] Using either remote control embodiment, the subscriber accesses the Level D hardware upgrade to select a digital audio program. The remote control sends an IR command signal to the Level D hardware upgrade, instructing the unit's microprocessor 602 to initiate the selection of a given program. The desired program is processed (i.e., tuned, demultiplexed, decrypted and decompressed) as described above and transmitted to the subscriber's stereo for listening.

[0269] The selection of a digital audio program does not necessarily require interaction with the subscriber's television. Instead, all communications required to select a digital audio program may occur between a remote control and the Level D hardware upgrade. As a result, the subscriber's television need not be turned on for the digital audio capability to operate.

[0270] Alternatively, the Level D hardware upgrade can be co-located with the set top terminal 220 and the subscriber

can select a digital audio program through a menu displayed on the subscriber's television. In this embodiment, the subscriber would use the set top terminal remote control to access a digital audio program selection menu.

[0271] In an alternative embodiment, the set top terminal 220 includes all the features of the Level D upgrade and, therefore, no upgrade is necessary. Those skilled in the art will recognize other alternatives that allow digital audio reception.

[0272] Figure 21 is a major menu 1160 displaying the digital audio program choices which are available for subscribers who have paid the monthly fee. In a chart format 1162, the major menu shows the top five, ten, and forty songs available in six different categories of music. Below the chart, the system is able to provide a text message 1164 describing the particulars of the audio program selected. Using the same logos and menu format, the system can provide a text description enticing the subscriber to pay the monthly fee and join the service. For example, one menu may allow the user to test the system with a free demonstration. Another menu allows the subscriber to request additional promotional information about the system. Such menus may be used throughout the menu system. From any of the menu screens for the digital audio feature, the subscriber may return to regular cable TV with the press of a single button.

i. VCR Control

[0273] Referring to Figure 22, the advanced system of the set top terminal 220 is used to control video tape machines and simplify recording programs using a Guide Record feature. The set top terminal 220 has a separate output 650 for a VCR. Control signals are transmitted through the VCR output of the set top terminal 220 and input to the VCR to allow the VCR to be automatically controlled by the set top terminal 220. Using the set top terminal 220, certain programs are selected by a subscriber from menus, and the VCR will be automatically activated to record the selected program.

[0274] In order to accommodate the VCR control feature, the set top terminal 220 sends instructions or control signals to the VCR. Such control signals are initiated by the set top terminal's microprocessor 602 and passed to the VCR either using a separate connection or as part of the video signals processed for display on the subscriber's television. These control signals are sent directly from the advanced set top terminal 220 to the VCR, instructing the VCR when to begin and end taping of a particular program.

[0275] The microprocessor 602 coordinates the dissemination of control signals sent to the VCR, storing the content of such signals in local memory. Upon nearing the time for the program to be displayed, the microprocessor 602 activates the menu generation software to display a notification menu or screen, notifying the subscriber that the program is nearing the time for display. This reminder will also request the subscriber to check whether a tape has been inserted into the VCR itself.

[0276] The subscriber can initiate the VCR control feature by accessing a VCR control submenu, which requests whether the subscriber wishes to record a program selected for future viewing. In this way the subscriber interactively enters such information on the menu screen or display using any of the hardware described above that accommodates subscriber interactive response capabilities.

[0277] In the preferred embodiment, the subscriber will use a movie library in conjunction with his VCR or other video taping machinery. The movie library is a menu selectable list of available movies. In that way, a subscriber may tape movies which are shown at inconvenient start times for later viewing. By enabling the proper features of the set top terminal 220, a subscriber can have the terminal activate the television and the VCR and perform all the functions necessary to tape a movie.

[0278] After the VCR control feature is initiated, a menu screen confirms the movie selection, start date and start time and informs the subscriber that the VCR will be automatically turned on. During this submenu, the user may return to the movie library major menu, or regular TV or cancel the movie library order by pressing the escape button. This menu shows that the subscriber has chosen to return to regular TV. The subscriber's VCR or other video taping equipment must be connected to the set top terminal 220 for the automatic taping feature to operate.

[0279] Following a program choice, a program description submenu is placed on the television screen. In addition, from this program description submenu, the viewer may choose to record the selected program on his VCR using the guide record feature. If the guide record feature is chosen, the guide record submenu 1170 shown in Figure 22 provides the subscriber with further instructions. In order for the set top terminal 220 to perform the guide record functions and operate the VCR, control signals are sent from the set top terminal 220 to the VCR via the video connection 650 or through a separate connection between the set top terminal 220 and the VCR. The VCR is capable of interpreting these control signals from the set top terminal 220 and performing the desired function (such as, activating the record feature). In the preferred embodiment, the VCR control signals are sent with the video signal and output from the output 650, as described above. Alternatively, a separate connection between the set top terminal 220 and VCR may be used.

j. HDTV Capability

[0280] The set top terminal 220 and program delivery system of the preferred embodiment can easily support high definition television (HDTV). The combination of digital video, compression and no restricted bandwidth limitation per channel makes the preferred system ideal for HDTV. The greater information flow of HDTV causes no problems for the system. The menu selection system of the preferred embodiment is a user friendly manner of presenting HDTV programming to the subscriber.

[0281] Figure 23 shows the integration of HDTV services into the menu-driven program delivery system. If the subscriber selects the major menu for HDTV 1032, the subscriber will receive either a description of the service with a suggestion to order the system, or a text note that the subscription is current and a listing of the currently available program selections in HDTV. If the subscriber has not paid to join the particular service, HDTV, the subscriber may be allowed to join one of the programs in progress for a limited time as a demo to entice the subscriber to order.

[0282] If a subscriber has paid the HDTV fees, the subscriber proceeds as in any other major menu screen. This particular major menu shows an example of how a follow-on or second screen may exist for the same menu. In this particular case, a second screen exists for the major menu HDTV 1032. The subscriber may access the second screen by selecting the last menu display block 1172 "Other HDTV Selections" in the lower part of the screen. Following this selection, the subscriber will be given a second screen of program selections. In this manner, any menu can have multiple screens with many program choices. This type of screen pagination on one menu allows the operations center 202 packager to avoid categorizing program selections within that same menu. In an alternative embodiment, the options available to the subscriber may be scrolled on one menu screen with the text within the menu display blocks changing as the subscriber scrolls up or scrolls down. Many variations of this HDTV example can be used with the described system.

k. Backyard System

[0283] In an alternative configuration, in areas without cable services where subscribers use backyard satellite systems (TV RO) to receive packaged television services, the set top terminal 220 will include the appropriate hardware to allow connection to the satellite 206 reception equipment through port 656. In this configuration, the menu system within the set top terminal 220 will be programmed directly from the operations center 202. Additionally, an upstream communication mechanism must be in place at the subscriber's home (i.e. modem) to communicate information to the operations center.

[0284] The hardware components that allow the set top terminal 220 to operate in a backyard system typically will not be included within the set top terminal shell itself. Instead, any such components accommodating the set top terminal's interoperability with a backyard program delivery system will typically reside outside the subscriber's home. As a result, the set top terminal 220 will operate as described above, notwithstanding any change in program delivery transmission media.

Claims

1. A method for selecting a program category submenu on a television system using a main menu having a menu cursor and menu options corresponding to program categories and using a remote control with menu select buttons, a cursor movement control, and a go button, the method comprising the steps of:

generating a main menu with menu options corresponding to program category submenus, the menu options being selectable by using a menu cursor;

selecting a program category submenu from the main menu comprising the steps of:

moving the menu cursor to a menu option corresponding to a desired program category submenu using the cursor movement control on the remote control; and

depressing the go button on the remote control when the cursor is located at the desired menu option; and

wherein the desired program category submenu is additionally selectable at any time by performing the step of depressing one of the menu select buttons, each menu select button corresponding to one of the program category submenus; and

generating the selected program category submenu.

2. The method of claim 1, wherein the cursor movement control is a joystick and the step of moving the menu cursor

comprises the step of:

pivoting the joystick to move the cursor in a direction corresponding the direction the joystick is pivoted.

- 5 3. The method of claim 1 or 2, wherein the cursor movement control is a ball and the step of moving the menu cursor comprises the step of:

rotating the ball to move the cursor in a direction corresponding the direction the ball is rotated.

- 10 4. The method of claim 3, wherein the ball is a depressible ball and the step of depressing the go button comprises the step of:

depressing the depressible ball.

- 15 5. The method of any of claims 1 to 4, wherein the cursor movement control is a plurality of cursor movement buttons, each representing a different direction of cursor travel, and wherein the step of moving the menu cursor comprises the step of:

20 depressing a cursor movement button to move the cursor in a direction corresponding to the direction of cursor travel represented by the depressed button.

6. The method of claim 5, wherein the cursor movement buttons are textured and the step of moving the menu cursor further comprises the step of:

25 identifying a cursor movement button by physically feeling its texture.

7. The method of claims 5 or 6, wherein the cursor movement buttons are colored differently from the menu select buttons, and the step of selecting a program category submenu further comprises the step of:

30 distinguishing between the cursor movement buttons and the menu select buttons by visually observing button color.

8. The method of claims 5, 6, or 7, wherein the cursor movement buttons are each bevelled and the step of moving the menu cursor further comprises the step of:

35 identifying a cursor movement button by physically feeling the direction in which the cursor movement button is bevelled.

- 40 9. The method of any of claims 1 to 8, wherein the menu select buttons each have an icon representing a program category disposed thereon, and wherein the step of depressing one of the menu select buttons comprises the step of:

45 identifying the menu select button to depress by visually observing an icon on the menu select button which corresponds to the program category desired to select.

10. A remote control for use with a set top terminal, the set top terminal generating a plurality of menus that may be sequenced from a main menu to a first level of menus to a second level of menus, the remote control comprising:

50 a first section for providing television remote control functions, and comprising:

at least one volume control button;
at least one channel select button; and
at least one power button;

55 a second section for providing menu access functions and comprising:

a plurality of menu select buttons for directly selecting second level menus, each menu select button corresponding to one of the second level menus so that depression of one of the menu select buttons directly selects the corresponding second level menu without accessing the first level menus; and

a cursor movement means for moving a cursor on the plurality of menus;

wherein the first section controls volume, channel and power functions of a television;

and wherein the second section augments the first section to provide an integrated remote control with volume, channel, power, menu selection, and cursor movement functions.

11. The remote control of claim 10, wherein the plurality of menu select buttons are coloured differently than the cursor movement means.

12. The remote control of claims 10 or 11, wherein the cursor movement means are textured.

13. The remote control of claims 10, 11, or 12, further comprising a means for communicating with the set top terminal and wherein selection of any one of the plurality of menu select buttons initiates generation of one of the plurality of menus by the set top terminal.

14. The remote control of any of claims 10 to 13, wherein the first and second sections are physically separable and the cursor movement means comprises a plurality of cursor movement buttons.

15. The remote control of any of claims 10 to 14, wherein the cursor movement means comprises a group of four directional buttons.

16. The remote control of claims 14 or 15, wherein the cursor movement buttons are bevelled.

17. An interface system for receiving a plurality of television signals and for generating a plurality of menus including main menus and submenus, each of the plurality of menus using menu content data, the interface system comprising:

a set top terminal for processing the menu content data and generating menus;

a remote control unit for effecting the set top terminal's generating of menus comprising:

menu select buttons for directly selecting one of the submenus from the plurality of submenus, each menu select button representing a different submenu available for selection, wherein the selected submenu is directly selected by depressing the menu select button that corresponds to that selected submenu without first selecting one of the main menus; and

means, coupled to the menu select buttons, for communicating with the set top terminal, wherein depressing the menu select button that corresponds to the selected submenu causes the selected submenu to be generated by the set top terminal.

18. The interface system of claim 17, wherein at least one of the received television signals includes a digital program control information signal, and wherein a portion of the menu content data is carried on the digital program control information signal.

19. The interface system of claims 17 or 18, wherein the menu select buttons further comprise icons representing the different submenus and wherein each menu select button includes one icon representing one of the different submenus.

20. The interface system of any of claims 17 to 19, wherein some of the plurality of menus have menu options, the remote control comprising:

means for choosing any of the menu options.

21. The interface system of any of claims 17 to 20, further comprising a television for visually displaying the selected submenu.

22. The interface system of any of claims 17 or 21, wherein some of the plurality of menus and submenus have a cursor and wherein the remote control unit further comprises:

cursor movement buttons, coupled to the communicating means, for causing a cursor to change position on

the selected menu or submenu.

23. The interface system of claim 22, wherein the menu select buttons are colored differently than the cursor movement buttons.

24. The interface system of claims 22 or 23, wherein the cursor movement buttons are textured.

25. The interface system of any of claims 17 to 24, wherein the set top terminal uses program instructions and further comprises:

a means for receiving a television programming signal;
a means for generating menus, including the main menus and submenus, using the television programming signal;
a means for receiving communications from the remote control unit;
a means for effecting the execution order of the program instructions using the received communications; and
a means for sequencing through the main menus and submenus, using the received remote control communications.

26. A remote control unit for use with a set top terminal generating a plurality of menus, each menu displaying a set of menu options, the plurality of menus divided into at least two levels of menus, a first level of menus and a second level of menus, the remote control unit comprising:

menu select buttons for selecting one of the second level menus, each menu select button representing one of the second level menus, wherein depression of the menu select button that represents the selected second level menu directly accesses that second level menu and bypasses the first level of menus; and
means, coupled to the menu select buttons, for communicating with the set top terminal, wherein selection of any one of the menu select buttons is communicated to the set top terminal effecting the generating of menus in the set top terminal and causing the selected second level menu to be generated.

27. The remote control of claim 26, wherein some menus use a movable cursor, the remote control further comprising:

cursor movement buttons for causing the cursor to move on the menus.

28. The remote control of claims 26 or 27, wherein the some of the menus are generated using menu content data, and wherein the set top terminal receives a digital program control information signal containing at least a portion of the menu content data.

29. The remote control of any of claims 26 to 28, wherein the second level of menus includes program category menus which correspond to program categories in which programs of like kind are grouped together for selection, and using icons to indicate the program categories, each menu select button further comprising an icon for visually indicating the program category menu represented by the menu select button.

30. The remote control unit of any of claims 26 to 29, further comprising a joystick for moving a cursor on the menus.

31. The remote control unit of any of claims 26 to 30, further comprising a ball for moving a cursor on the menus.

32. The remote control unit of any of claims 26 to 31, further comprising a rolling-depressible button for moving a cursor on the menus.

33. The remote control unit of any of claims 27 to 32, wherein the menu select buttons are colored differently than the cursor movement buttons.

34. The remote control unit of any of claims 27 to 33, wherein the cursor movement buttons are textured.

35. The remote control of any of claims 27 to 34, further comprising a go button, wherein the cursor movement buttons comprise four directional cursor movement buttons and wherein a first directional cursor movement button opposes a second directional cursor movement button along the length of the remote control to form a lengthwise pair of directional buttons and a third directional cursor movement button opposes a fourth directional cursor movement

button transverse to the remote control to form a transverse pair of directional buttons, and wherein the lengthwise and transverse pairs of directional buttons are centered and perpendicular to each other with the go button positioned in an area between the lengthwise and transverse pair of directional buttons; and

5 wherein each of the four directional cursor movement buttons comprises a bevelled face wherein the beveled face bevels down towards the go button.

36. The remote control of claim 35, wherein the go button is recessed below the bevelled face of the four directional cursor movement buttons.

10 37. The remote control of any of claims 26 to 36, wherein the remote control further comprises standard buttons, a go button and pay television buttons, and wherein:

the standard buttons comprise channel select, volume, and signal source buttons; and
the standard buttons are longitudinally separated from the cursor, go, menu select, and pay television buttons.

15 38. The remote control of any of claims 26 to 37, wherein the remote control further comprises standard buttons, cursor movement buttons, a go button and pay television buttons, and wherein:

20 the standard buttons comprise channel select, volume, and signal source buttons; and
the standard buttons are transversely separated from the cursor movement, go, menu select, and pay television buttons.

39. The remote control unit of any of claims 26 to 38, further comprising a go button to select a menu option.

25 40. The remote control unit of any of claims 35 to 39, wherein the go button is colored differently from the menu select buttons.

41. The remote control unit of any of claims 26 to 40, wherein the remote control unit further comprises standard buttons, and wherein the menu select buttons are physically distinguishable from the standard buttons.

30 42. The remote control unit of any of claims 26 to 37 or 39 to 41, wherein the remote control contains a plurality of buttons, including a standard group comprising volume control and channel select buttons, and a special group including cursor movement buttons and the menu select buttons, whereby the two groups of buttons are physically separated from each other on the remote control unit by a line at or above the center of mass of the remote control unit.

43. The remote control unit of any of claims 26 to 42, further comprising a plurality of standard buttons, and wherein at least one menu select button is colored differently from the standard buttons.

40 44. The remote control of any of claims 26 to 43, wherein icons are used, each menu select button further comprising an icon for visually indicating the second level menu represented by the menu select button.

45 45. The remote control unit of any of claims 26 to 44, wherein the second level of menus includes program category menus which correspond to program categories in which programs of like kind are grouped together for selection, and wherein the first level of menus contains one or more menu options for selecting a second level menu, the remote control further comprising:

50 cursor movement buttons to move a cursor on at least the first level of menus to overlay a menu option; and
a go button to select a menu option which is overlayed by the cursor; and

wherein a program category menu may be selected by either using the menu select buttons or the cursor movement buttons and go button.

55 46. The remote control unit of any of claims 26 to 45, comprising one or more additional menu levels, wherein one or more menu select buttons each comprise an icon representing a program category menu, and wherein four directional cursor movement buttons and a go button are used to sequence through adjacent menu levels and each menu select button is used to directly access a program category menu corresponding to the category represented by its icon.

47. The remote control unit of any of claims 26 to 46, wherein one or more menus from the second level of menus may be selected from menu options displayed on the first level of menus, the remote control further comprising:

a plurality of standard buttons;
 cursor movement buttons for moving a cursor through the menu options presented on the first level of menus;
 a go button for selecting a menu option corresponding to the cursor location; and

wherein the cursor movement buttons, go button, and menu select buttons are coupled to the communicating means and are physically distinguishable by touch from each other and from the standard buttons, enabling a user to easily access and depress a cursor movement button, the go button or a menu select button without looking at the remote control unit.

48. The remote control unit of any of claims 26 to 47, wherein one or more menus from the second level of menus may be selected from menu options displayed on the first level of menus, the remote control further comprising:

a face plate with labeling;
 four directional cursor movement buttons, protruding from the face plate and coupled to the means for communicating, for moving a cursor displayed on the television to overlay a menu option; and
 a go button, protruding from the face plate and coupled to the means for communicating, for choosing the menu option currently overlayed by the cursor,

wherein depression of the go button on the remote control unit effects processing of software at the set top terminal, and wherein the four directional cursor movement buttons and the go button are used to sequence through any of the second level menus.

49. The remote control unit of any of claims 27 to 48, further comprising pay television buttons and a power button, and wherein:

the cursor movement buttons are textured;
 the menu select buttons are the largest buttons on the remote control; and
 the pay television buttons, power button and go button are colored differently than other buttons on the remote control.

50. The remote control unit of any of claims 26 to 49, wherein one or more menus from the second level of menus may be selected from menu options displayed on the first level of menus, and wherein the second level of menus includes program category menus which correspond to program categories in which programs of like kind are grouped together for selection, the remote control further comprising:

a face plate with labeling;
 at least one cursor movement button, protruding from the face plate and coupled to the means for communicating, for moving a cursor on the menu options;
 a go button, protruding from the face plate and coupled to the means for communicating, for selecting a menu option at the cursor location;
 a power button protruding from the face plate and coupled to the means for communicating; and
 standard buttons including a channel up button, a channel down button, and numerical buttons numbered zero through nine;

wherein a program category may be selected for viewing using the menu select buttons or the cursor movement buttons.

51. The remote control of any of claims 26 to 50, wherein the menu select buttons are included on a first section of the remote control unit, the first section further comprising:

a cursor movement means for moving a cursor over menu options on the menus; and
 a selection means for selecting the menu option at the cursor location; and wherein the remote control unit further comprises:

a second section comprising:

at least one volume control button;
at least one channel select button; and
at least one power button;

5 wherein the second section controls volume, channel and power functions of a television; and
wherein the first section augments the second section and is physically separable from the second section,
and wherein the remote control unit provides an integrated remote control with volume, channel, power, menu
selection, and cursor movement functions.

10 52. The remote control of any of claims 10-16, wherein each of the plurality of menu select buttons directly select one
of a plurality of program category menus.

53. The remote control of claim 52, wherein at least one of the plurality of program category menus display programs
for selection for viewing.

15 54. The remote control of claim 53, wherein program signals are received at the set top terminal from a cable headend
and a program selected for viewing from the program category menus is viewed as the program signals are re-
ceived.

20 55. The remote control of any of claims 10-16 or 52-54, wherein depression of each of the menu select buttons performs
a single function.

56. The remote control of claim 55, wherein every depression of a particular menu select button directly selects the
same program category menu.

25 57. The interface system of any of claims 17-25, wherein the buttons are depressible.

58. The remote control unit of any of claims 26-51, wherein the buttons are depressible.

30

Patentansprüche

1. Verfahren zum Auswählen eines Programmkategorie-Untermenüs auf einem Fernsehsystem unter Benutzung
eines Hauptmenüs mit einem Menücursor und Menüoptionen, die zu Programmkategorien gehören, und unter
35 Benutzung einer Fernbedienung mit Menü-Auswahltasten, einer Cursor-Bewegungssteuerung und einer Go-Ta-
ste, umfassend die Schritte:

Erzeugen eines Hauptmenüs mit Menüoptionen, die zu Programmkategorie-Untermenüs gehören, wobei die
Menüoptionen durch Nutzung eines Menücursors auswählbar sind;
40 Auswählen eines Programmkategorie-Untermenüs aus dem Hauptmenü, umfassend die Schritte:

Bewegen des Menücursors auf eine Menüoption, die zu einem gewünschten Programmkategorie-Unter-
menü gehört, unter Verwendung der Cursor-Bewegungssteuerung auf der Fernbedienung; und
Drücken der Go-Taste auf der Fernbedienung, wenn der Cursor sich auf der gewünschten Menüoption
45 befindet; und

wobei das gewünschte Programmkategorie-Untermenü zusätzlich zu jeder Zeit wählbar ist durch Ausführung
des Schrittes des Drückens einer der Menü-Auswahltasten,
wobei eine jeweilige Menü-Auswahltaste zu einem der Programmkategorie-Untermenüs gehört; und
50 Erzeugen des ausgewählten Programmkategorie-Untermenüs.

2. Verfahren nach Anspruch 1, wobei die Cursor-Bewegungssteuerung ein Joystick ist und das Bewegen des Me-
nücursors den Schritt beinhaltet:

55 Schwenken des Joysticks, um den Cursor in eine zu der Richtung, in die der Joystick geschwenkt wurde,
gehörende Richtung zu bewegen.

3. Verfahren nach Anspruch 1 oder 2, wobei die Cursor-Bewegungssteuerung eine Kugel ist und das Bewegen des

Menücursors folgenden Schritt beinhaltet:

Drehen der Kugel, um den Cursor in eine zu der Richtung, in die die Kugel gedreht wurde, gehörende Richtung zu bewegen.

5

4. Verfahren nach Anspruch 3, wobei die Kugel eine niederdrückbare Kugel ist, und das Drücken der Go-Taste folgenden Schritt beinhaltet:

Drücken der niederdrückbaren Kugel.

10

5. Verfahren nach einem der Ansprüche 1 bis 4, wobei die Cursor-Bewegungssteuerung aus einer Vielzahl von Cursor-Bewegungstasten besteht, die jeweils eine unterschiedliche Richtung der Cursorbewegung darstellen, und wobei das Bewegen des Menücursors folgenden Schritt beinhaltet:

Drücken einer Cursor-Bewegungstaste, um den Cursor in eine Richtung zu bewegen, die der durch die gedrückte Taste entsprechenden Richtung der Cursorbewegung zugehört.

15

6. Verfahren nach Anspruch 5, wobei die Cursor-Bewegungstasten texturiert sind und das Bewegen des Menücursors weiterhin den Schritt beinhaltet:

Identifizieren einer Cursor-Bewegungstaste durch körperliches Erfühlen ihrer Textur.

20

7. Verfahren nach Anspruch 5 oder 6, wobei die Cursor-Bewegungstasten anders als die Menü-Auswahlstasten gefärbt sind, und das Auswählen eines Programmkategorie-Untermenüs weiterhin den Schritt umfaßt:

Unterscheiden zwischen den Cursor-Bewegungstasten und den Menü-Auswahlstasten durch visuelles Erfassen der Tastenfarbe.

25

8. Verfahren nach einem der Ansprüche 5 bis 7, wobei die Cursor-Bewegungstasten jeweils abgeschrägt sind, und das Bewegen des Menücursors weiterhin den Schritt umfaßt:

Identifizieren einer Cursor-Bewegungstaste durch körperliches Erfühlen der Richtung, in welche die Cursor-Bewegungstaste abgeschrägt ist.

30

9. Verfahren nach einem der Ansprüche 1 bis 8, wobei die Menü-Auswahlstasten jeweils ein Icon aufweisen, das eine darauf abgelegte Programmkategorie repräsentiert, und wobei das Drücken einer der Menü-Auswahlstasten den Schritt umfaßt:

Identifizieren der zu drückenden Menü-Auswahlstaste durch visuelles Erfassen eines Icons auf der Menü-Auswahlstaste, die zu der Programmkategorie gehört, die auszuwählen gewünscht ist.

40

10. Fernbedienung zum Gebrauch mit einem Set-Top-Terminal, wobei das Set-Top-Terminal eine Vielzahl von Menüs erzeugt, die von einem Hauptmenü zu einer ersten Ebene von Menüs zu einer zweiten Ebene von Menüs in Folge angeordnet sein können, umfassend:

einen ersten Abschnitt zum Verfügbarmachen von Fernseh-Fernbedienungsfunktionen und umfassend:

mindestens eine Lautstärke-Steuertaste;

mindestens eine Kanal-Auswahlstaste; und

mindestens eine Netz-Taste;

einen zweiten Abschnitt zum Verfügbarmachen von Menüzugriffs-Funktionen und umfassend:

50

eine Vielzahl von Menü-Auswahlstasten zum direkten Auswählen von Zweite-Ebene-Menüs, wobei eine jeweilige Menü-Auswahlstaste zu einem der Zweite-Ebene-Menüs gehört, so daß das Drücken einer der Menü-Auswahlstasten das zugehörige Zweite-Ebene-Menü ohne Zugriff auf die Erste-Ebene-Menüs direkt auswählt; und

Cursor-Bewegungseinrichtungen zum Bewegen des Cursors auf der Vielzahl von Menüs;

55

wobei der erste Abschnitt die Lautstärke, den Kanal und die Netzfunktion eines Fernsehers steuert;
und wobei der zweite Abschnitt eine Erweiterung des ersten Abschnitts darstellt, um eine integrierte Fernbedienung mit Lautstärke-, Kanal-, Netz-, Menüauswahl- und Cursorbewegungs-Funktionen zur Verfügung zu stellen.

5

11. Fernbedienung nach Anspruch 10, wobei die Vielzahl von Menü-Auswahltasten anders als die Cursor-Bewegungseinrichtungen gefärbt ist.

12. Fernbedienung nach Anspruch 10 oder 11, wobei die Cursor-Bewegungseinrichtungen texturiert sind.

10

13. Fernbedienung nach einem der Ansprüche 10 bis 12, weiterhin umfassend eine Einrichtung zum Kommunizieren mit dem Set-Top-Terminal, wobei die Auswahl irgendeiner der Menü-Auswahltasten die Erzeugung eines Menüs durch das Set-Top-Terminal auslöst.

15

14. Fernbedienung nach einem der Ansprüche 10 bis 13, wobei der erste und der zweite Abschnitt physikalisch trennbar sind, und die Cursor-Bewegungseinrichtung eine Vielzahl von Cursor-Bewegungstasten umfaßt.

15. Fernbedienung nach einem der Ansprüche 10 bis 14, wobei die Cursor-Bewegungseinrichtung eine Gruppe von vier gerichteten Tasten umfaßt.

20

16. Fernbedienung nach Anspruch 14 oder 15, wobei die Cursor-Bewegungstasten abgeschrägt sind.

17. Schnittstellensystem zum Empfangen einer Vielzahl von Fernsehsignalen und zum Erzeugen einer Vielzahl von Menüs einschließlich Haupt- und Untermenüs, wobei ein jeweiliges aus der Vielzahl von Menüs Menüinhaltsdaten verwendet, und das Schnittstellensystem umfaßt:

25

ein Set-Top-Terminal zum Verarbeiten der Menüinhaltsdaten und zum Erzeugen von Menüs;
eine Fernbedienungseinheit zum Auslösen der Erzeugung von Menüs durch das Set-Top-Terminal, umfassend:

30

Menü-Auswahltasten zum direkten Auswählen eines der Untermenüs aus der Vielzahl von Untermenüs, wobei eine jeweilige Menü-Auswahltaste ein anderes zur Auswahl stehendes Untermenü repräsentiert, wobei das ausgewählte Untermenü direkt durch Drücken der Menü-Auswahltaste, die zu dem gewählten Untermenü gehört, ausgewählt wird, ohne erst eines der Hauptmenüs auszuwählen; und
eine mit den Menü-Auswahltasten verbundene Einrichtung zum Kommunizieren mit dem Set-Top-Terminal, wobei das Drücken der Menü-Auswahltaste, die zu dem gewählten Untermenü gehört, bewirkt, daß das ausgewählte Untermenü durch das Set-Top-Terminal erzeugt wird.

35

18. System nach Anspruch 17, wobei mindestens eines der empfangenen Fernsehsignale ein Steuerinformationssignal für ein digitales Programm beinhaltet, und wobei ein Bereich der Menüinhaltsdaten mit dem Steuerinformationssignal für das digitale Programm übertragen wird.

40

19. System nach Anspruch 17 oder 18, wobei die Menü-Auswahltasten weiterhin Icons umfassen, die die verschiedenen Untermenüs repräsentieren, und wobei eine jeweilige Menü-Auswahltaste ein Icon beinhaltet, das eines der verschiedenen Untermenüs repräsentiert.

45

20. System nach einem der Ansprüche 17 bis 19, wobei einige der Vielzahl von Menüs Menüoptionen aufweisen, wobei die Fernbedienung umfaßt:

50

eine Einrichtung zum Auswählen einer der Menüoptionen.

21. System nach einem der Ansprüche 17 bis 20, weiterhin umfassend einen Fernseher zur visuellen Darstellung des ausgewählten Untermenüs.

55

22. System nach Anspruch 17 oder 21, wobei einige der Vielzahl von Menüs und Untermenüs einen Cursor aufweisen, und wobei die Fernbedienungseinheit weiterhin umfaßt:

mit der Kommunikationseinrichtung verbundene Cursor-Steuertasten zum Bewirken einer Positionsänderung

des Cursors auf dem ausgewählten Menü oder Untermenü.

23. System nach Anspruch 22, wobei die Menü-Auswahlkosten anders als die Cursor-Bewegungstasten gefärbt sind.
- 5 24. System nach Anspruch 22 oder 23, wobei die Cursor-Bewegungstasten texturiert sind.
25. System nach einem der Ansprüche 17 bis 24, wobei das Set-Top-Terminal Programmanweisungen verwendet und weiterhin beinhaltet:
- 10 eine Einrichtung zum Empfangen eines Fernseher-Programmiersignals;
eine Einrichtung zum Erzeugen von Menüs, eingeschlossen Hauptmenüs und Untermenüs, unter Verwendung des Fernseher-Programmiersignals;
eine Einrichtung zum Empfangen von Übermittlungen von der Fernbedienungseinheit;
15 eine Einrichtung zum Bewirken der Ausführanweisung der Programmanweisungen unter Verwendung der empfangenen Übermittlungen; und
eine Einrichtung zum aufeinanderfolgenden Durchlaufen der Hauptmenüs und Untermenüs unter Verwendung der empfangenen Übermittlungen von der Fernbedienung.
- 20 26. Fernbedienungseinheit zur Benutzung mit einem Set-Top-Terminal, das eine Vielzahl von Menüs erzeugt, wobei ein jeweiliges Menü eine Menge von Menüoptionen anzeigt, wobei die Vielzahl von Menüs in mindestens zwei Ebenen von Menüs, eine erste Ebene von Menüs und eine zweite Ebene von Menüs, geteilt ist, wobei die Fernbedienungseinheit umfaßt:
- 25 Menü-Auswahlkosten zum Auswählen eines der Zweite-Ebene-Menüs, wobei eine jeweilige Menü-Auswahlkosten eines der Zweite-Ebene-Menüs repräsentiert, wobei das Drücken der Menü-Auswahlkosten, die das ausgewählte Zweite-Ebene-Menü repräsentiert, auf dieses Zweite-Ebene-Menü direkt zugreift und die erste Ebene der Menüs umgeht; und
eine mit den Menü-Auswahlkosten verbundene Einrichtung zum Kommunizieren mit dem Set-Top-Terminal, wobei die Auswahl irgendeiner der Menü-Auswahlkosten an das Set-Top-Terminal übermittelt wird und die
30 Erzeugung von Menüs in dem Set-Top-Terminal auslöst und bewirkt, daß das ausgewählte Zweite-Ebene-Menü erzeugt wird.
27. Fernbedienung nach Anspruch 26, wobei einige Menüs einen bewegbaren Cursor verwenden, weiterhin umfassend:
- 35 Cursor-Bewegungstasten zum Bewirken, daß der Cursor sich auf den Menüs bewegt.
28. Fernbedienung nach Anspruch 26 oder 27, wobei einige der Menüs unter Verwendung von Menüinhaltsdaten erzeugt werden, und wobei das Set-Top-Terminal ein Steuerinformationssignal für ein digitales Programm empfängt, das zumindest einen Teil der Menüinhaltsdaten enthält.
- 40 29. Fernbedienung nach einem der Ansprüche 26 bis 28, wobei die zweite Ebene der Menüs Programmkategorienmenüs beinhaltet, die zu Programmkategorien gehören, in die Programme ähnlicher Beschaffenheit zur Auswahl gruppiert sind, und wobei Icons benutzt werden, um die Programmkategorien zu bezeichnen, wobei eine jeweilige Menü-Auswahlkosten weiterhin ein Icon zum visuellen Anzeigen des Programmkategorienmenüs, das durch die Menü-Auswahlkosten repräsentiert ist, umfaßt.
- 45 30. Fernbedienungseinheit nach einem der Ansprüche 26 bis 29, weiterhin umfassend einen Joystick zum Bewegen eines Cursors auf den Menüs.
- 50 31. Fernbedienungseinheit nach einem der Ansprüche 26 bis 30, weiterhin umfassend eine Kugel zum Bewegen eines Cursors auf den Menüs.
32. Fernbedienungseinheit nach einem der Ansprüche 26 bis 31, weiterhin umfassend eine rollbare, niederdrückbare Taste zum Bewegen eines Cursors auf dem Menü.
- 55 33. Fernbedienungseinheit nach einem der Ansprüche 27 bis 32, wobei die Menü-Auswahlkosten anders als die Cursor-Bewegungstasten gefärbt sind.

34. Fernbedienungseinheit nach einem der Ansprüche 27 bis 33, wobei die Cursor-Bewegungstasten texturiert sind.
35. Fernbedienung nach einem der Ansprüche 27 bis 34, weiterhin umfassend eine Go-Taste, wobei die Cursor-Bewegungstasten vier gerichtete Cursor-Bewegungstasten umfassen, und wobei eine erste gerichtete Cursor-Bewegungstaste einer zweiten gerichteten Cursor-Bewegungstaste entlang der Längsseite der Fernbedienung gegenüberliegt, um ein längsseitiges Paar von gerichteten Tasten zu bilden, und wobei eine dritte gerichtete Cursor-Bewegungstaste einer vierten gerichteten Cursor-Bewegungstaste in Querrichtung der Fernbedienung gegenüberliegt, um ein querseitiges Paar gerichteter Tasten zu bilden, und wobei die längsseitigen und querseitigen Paare gerichteter Tasten zentriert und rechtwinklig zueinander angeordnet sind, wobei die Go-Taste in einem Bereich zwischen dem längsseitigen und querseitigen Paar gerichteter Tasten angeordnet ist; und wobei eine jeweilige der vier gerichteten Cursor-Bewegungstasten eine abgeschrägte Fläche umfaßt, wobei die abgeschrägte Fläche in Richtung der Go-Taste nach unten abgeschrägt ist.
36. Fernbedienung nach Anspruch 35, wobei die Go-Taste unterhalb der abgeschrägten Flächen der vier gerichteten Cursor-Bewegungstasten eingelassen ist.
37. Fernbedienung nach einem der Ansprüche 26 bis 36, wobei die Fernbedienung weiterhin Standardtasten, eine Go-Taste und Bezahlfernsehen-Tasten umfaßt und wobei:
- die Standardtasten Kanalauswahl-, Lautstärke- und Signalquellen-Tasten umfassen; und
- wobei die Standardtasten in Längsrichtung von den Cursor-, der Go-, den Menüauswahl- und den Bezahlfernsehen-Tasten getrennt sind.
38. Fernbedienung nach einem der Ansprüche 26 bis 37, wobei die Fernbedienung weiterhin Standardtasten, Cursor-Bewegungstasten, eine Go-Taste und Bezahlfernsehen-Tasten umfaßt und wobei:
- die Standardtasten Kanalauswahl-, Lautstärke- und Signalquellen-Tasten umfassen; und
- wobei die Standardtasten in Querrichtung von den Cursorbewegungs-, der Go-, den Menüauswahl- und den Bezahlfernsehen-Tasten getrennt sind.
39. Fernbedienungseinheit nach einem der Ansprüche 26 bis 38, weiterhin umfassend eine Go-Taste, um eine Menüoption auszuwählen.
40. Fernbedienungseinheit nach einem der Ansprüche 35 bis 39, wobei die Go-Taste anders als die Menü-Auswahl-tasten gefärbt ist.
41. Fernbedienungseinheit nach einem der Ansprüche 26 bis 40, weiterhin umfassend Standardtasten, wobei die Menü-Auswahl-tasten von den Standardtasten körperlich unterscheidbar sind.
42. Fernbedienungseinheit nach einem der Ansprüche 26 bis 37 und 39 bis 41, wobei die Fernbedienung eine Vielzahl von Tasten beinhaltet, einschließlich einer Lautstärke-Steuer- und Kanal-Auswahl-tasten umfassenden Standardgruppe, und einer Cursor-Bewegungstasten und die Menü-Auswahl-tasten beinhaltenden speziellen Gruppe, wobei die zwei Gruppen von Tasten auf der Fernbedienungseinheit durch eine Linie am oder über dem Schwerpunkt der Fernbedienungseinheit voneinander physikalisch getrennt sind.
43. Fernbedienungseinheit nach einem der Ansprüche 26 bis 42, weiterhin umfassend eine Vielzahl von Standardtasten, wobei mindestens eine Menü-Auswahl-taste anders als die Standardtasten gefärbt ist.
44. Fernbedienung nach einem der Ansprüche 26 bis 43, wobei Icons verwendet werden, wobei eine jeweilige Menü-Auswahl-taste weiterhin ein Icon zum visuellen Anzeigen des durch die Menü-Auswahl-taste repräsentierten Zweite-Ebene-Menüs umfaßt.
45. Fernbedienungseinheit nach einem der Ansprüche 26 bis 44, wobei die zweite Ebene der Menüs Programmkategorienmenüs beinhaltet, die zu Programmkategorien gehören, in denen Programme ähnlicher Beschaffenheit zur Auswahl zusammen gruppiert sind, und wobei die erste Ebene von Menüs eine oder mehrere Menüoptionen zum

Auswählen eines Zweite-Ebene-Menüs beinhaltet, wobei die Fernbedienung weiterhin umfaßt:

Cursor-Bewegungstasten, um einen Cursor auf zumindest der ersten Ebene von Menüs zu bewegen, um eine Menüoption zu belegen; und

eine Go-Taste zum Auswählen einer Menüoption, die durch den Cursor belegt ist; und

wobei ein Programmkategoriemenü entweder durch Benutzung der Menü-Auswahlstasten oder der Cursor-Bewegungstasten und der Go-Taste ausgewählt werden kann.

46. Fernbedienungseinheit nach einem der Ansprüche 26 bis 45, umfassend eine oder mehrere zusätzliche Menü-Ebenen, wobei eine oder mehrere Menü-Auswahlstasten jeweils ein ein Programmkategoriemenü repräsentierendes Icon umfassen, und wobei vier gerichtete Cursor-Bewegungstasten und eine Go-Taste verwendet werden, um sich durch benachbarte Menü-Ebenen in Folge zu bewegen, und wobei eine jeweilige Menü-Auswahlstaste verwendet wird, um auf ein Programmkategoriemenü, das zu der durch ihr Icon repräsentierten Kategorie gehört, direkt zuzugreifen.

47. Fernbedienungseinheit nach einem der Ansprüche 26 bis 46, wobei ein oder mehrere Menüs der zweiten Ebene von Menüs von auf der ersten Ebene der Menüs dargestellten Menüoptionen aus ausgewählt werden können, wobei die Fernbedienung weiterhin umfaßt:

eine Vielzahl von Standardtasten;

Cursor-Bewegungstasten zum Bewegen eines Cursors durch die auf der ersten Ebene von Menüs angezeigten Menüoptionen;

eine Go-Taste zum Auswählen einer zur Cursorposition gehörenden Menüoption; und

wobei die Cursor-Bewegungstasten, die Go-Taste und die Menü-Auswahlstasten mit der Kommunikationseinrichtung verbunden sind und durch Berührung voneinander und von den Standardtasten körperlich unterscheidbar sind, um so einen Benutzer in die Lage zu versetzen, auf eine Cursor-Bewegungstaste, die Go-Taste oder eine Menü-Auswahlstaste einfach zuzugreifen und sie zu drücken, ohne auf die Fernbedienungseinheit sehen zu müssen.

48. Fernbedienungseinheit nach einem der Ansprüche 26 bis 47, wobei ein oder mehrere Menüs der zweiten Ebene von Menüs von auf der ersten Ebene von Menüs dargestellten Menüoptionen aus ausgewählt werden können, wobei die Fernbedienung weiterhin umfaßt:

ein Schriftblatt mit Beschriftung;

vier aus dem Schriftblatt hervorstehende und mit der Kommunikationseinrichtung verbundene gerichtete Cursor-Bewegungstasten zum Bewegen eines auf dem Fernseher dargestellten Cursors, um eine Menüoption zu belegen; und

eine aus dem Schriftblatt herausragende und mit der Kommunikationseinrichtung verbundene Go-Taste zum Auswählen der momentan durch den Cursor belegten Menüoption, wobei das Drücken der Go-Taste auf der Fernbedienungseinheit die Ausführung von Software in dem Set-Top-Terminal bewirkt, und wobei die vier gerichteten Cursor-Bewegungstasten und die Go-Taste benutzt werden, um sich in Folge durch eines der Zweite-Ebene-Menüs zu bewegen.

49. Fernbedienungseinheit nach einem der Ansprüche 27 bis 48, weiterhin umfassend Bezahlfernsehen-Tasten und eine Netztaste, wobei:

die Cursor-Bewegungstasten texturiert sind;

die Menü-Auswahlstasten die größten Tasten auf der Fernbedienung sind; und

die Bezahlfernsehen-Tasten, die Netztaste und die Go-Taste anders als andere Tasten auf der Fernbedienung gefärbt sind.

50. Fernbedienungseinheit nach einem der Ansprüche 26 bis 49, wobei ein oder mehrere Menüs der zweiten Ebene von Menüs von auf der ersten Ebene von Menüs dargestellten Menüoptionen aus ausgewählt werden können, und wobei die zweite Ebene von Menüs Programmkategoriemenüs beinhalten, die zu Programmkategorien gehören, in denen Programme ähnlicher Beschaffenheit zur Auswahl zusammen gruppiert sind, wobei die Fernbedienung weiterhin umfaßt:

ein Schriftblatt mit Beschriftung;
 zumindest eine aus dem Schriftblatt herausragende und mit der Kommunikationseinrichtung verbundene Cursor-Bewegungstaste zum Bewegen eines Cursors auf den Menüoptionen;
 eine aus dem Schriftblatt hervorragende und mit der Kommunikationseinrichtung verbundene Go-Taste zum Auswählen einer Menüoption an der Cursorposition;
 eine Netztaste, die aus dem Schriftblatt herausragt und mit der Kommunikationseinrichtung verbunden ist; und
 Standardtasten, die eine Kanal-Weiter-Taste, eine Kanal-Zurück-Taste und von 0 bis 9 numerierte numerische Tasten beinhalten;

wobei eine Programmkategorie unter Benutzung der Menü-Auswahl-tasten oder der Cursor-Bewegungstasten zum Ansehen ausgewählt werden kann.

51. Fernbedienung nach einem der Ansprüche 26 bis 50, wobei die Menü-Auswahl-tasten in einem ersten Abschnitt der Fernbedienung beinhaltet sind, wobei der erste Abschnitt weiterhin umfaßt:

Cursor-Bewegungseinrichtungen zum Bewegen eines Cursors über Menüoptionen auf den Menüs; und
 eine Auswahleinrichtung zum Auswählen der Menüoptionen an der Cursorposition;

wobei die Fernbedienungseinheit weiterhin umfaßt:

einen zweiten Abschnitt umfassend:

zumindest eine Lautstärke-Steuertaste;
 zumindest eine Kanal-Auswahl-taste; und
 zumindest eine Netztaste;

wobei der zweite Abschnitt die Lautstärke-, die Kanal- und die Netz-Funktionen eines Fernsehers steuert; und
 wobei der erste Abschnitt den zweiten Abschnitt erweitert und vom zweiten Abschnitt physikalisch trennbar ist, und wobei die Fernbedienungseinheit eine integrierte Fernbedienung mit Lautstärke-, Kanal-, Netz-, Menü-auswahl- und Cursorbewegungs-Funktionen zur Verfügung stellt.

52. Fernbedienung nach einem der Ansprüche 10 bis 16, wobei eine jeweilige der Menü-Auswahl-tasten eines der Programm-kategorie-menüs direkt auswählt.

53. Fernbedienung nach Anspruch 52, wobei zumindest eines der Programm-kategorie-menüs Programme anzeigt, die zum Anschauen auswählbar sind.

54. Fernbedienung nach Anspruch 53, wobei das Set-Top-Terminal von einem Kabelende ein Programmsignal empfängt und ein von den Programm-kategorie-Menüs zum Anschauen ausgewähltes Programm anschaulich ist, wenn die Programmsignale empfangen werden.

55. Fernbedienung nach einem der Ansprüche 10 bis 16 oder 52 bis 54, wobei das Drücken jeder der Menü-Auswahl-tasten eine einzelne Funktion ausführt.

56. Fernbedienung nach Anspruch 55, wobei jedes Drücken einer bestimmten Menü-Auswahl-taste das gleiche Programm-kategorie-menü direkt auswählt.

57. Schnittstellensystem nach einem der Ansprüche 17 bis 25, wobei die Tasten niederdrückbar sind.

58. Fernbedienungseinheit nach einem der Ansprüche 26 bis 51, wobei die Tasten niederdrückbar sind.

Revendications

1. Procédé pour sélectionner un sous-menu de catégories de programmes sur un système de télévision en utilisant un menu principal ayant un curseur de menu et des options de menu correspondant à des catégories de programmes et en utilisant une télécommande dotée de boutons de sélection de menu, d'une commande de mouvement de curseur, et d'un bouton de validation, le procédé comportant les étapes consistant à :

générer un menu principal ayant des options de menu correspondant à des sous-menus de catégories de programmes, les options de menu pouvant être sélectionnées en utilisant un curseur de menu, sélectionner un sous-menu de catégories de programmes à partir du menu principal comportant les étapes consistant à :

5

déplacer le curseur de menu jusqu'à une option de menu correspondant à un sous-menu de catégories de programmes voulu en utilisant la commande de mouvement de curseur située sur la télécommande, et appuyer sur le bouton de validation situé sur la télécommande lorsque le curseur se trouve sur l'option de menu voulue, et

10

dans lequel le sous-menu de catégories de programmes voulu peut de plus être sélectionné à un instant quelconque en exécutant l'étape consistant à appuyer sur l'un des boutons de sélection de menu, chaque bouton de sélection de menu correspondant à l'un des sous-menus de catégories de programmes, et générer le sous-menu de catégories de programmes sélectionné.

15

2. Procédé selon la revendication 1, dans lequel la commande de mouvement de curseur est une manette et l'étape consistant à déplacer le curseur de menu comporte l'étape consistant à :

20

faire pivoter la manette pour déplacer le curseur dans une direction correspondant à la direction dans laquelle la manette est pivotée.

3. Procédé selon les revendications 1 ou 2, dans lequel la commande de mouvement de curseur est une boule et l'étape consistant à déplacer le curseur de menu comporte l'étape consistant à :

25

faire tourner la boule pour déplacer le curseur dans une direction correspondant à la direction dans laquelle la boule est entraînée en rotation.

4. Procédé selon la revendication 3, dans lequel la boule est une boule pouvant être enfoncée et l'étape consistant à appuyer sur le bouton de validation comporte l'étape consistant à :

30

enfoncer la boule pouvant être enfoncée.

5. Procédé selon l'une quelconque des revendications 1 à 4, dans lequel la commande de mouvement de curseur est une pluralité de boutons de mouvement de curseur, représentant chacun une direction différente de défilement du curseur, et dans lequel l'étape consistant à déplacer le curseur de menu comporte l'étape consistant à :

35

enfoncer un bouton de mouvement de curseur pour déplacer le curseur dans une direction correspondant à la direction de défilement du curseur représentée par le bouton enfoncé.

40

6. Procédé selon la revendication 5, dans lequel les boutons de mouvement de curseur sont texturés et l'étape consistant à déplacer le curseur de menu comporte en outre l'étape consistant à :

identifier un bouton de mouvement de curseur en sentant physiquement sa texture.

45

7. Procédé selon les revendications 5 ou 6, dans lequel les boutons de mouvement de curseur sont colorés différemment des boutons de sélection de menu, et l'étape consistant à sélectionner un sous-menu de catégories de programmes comporte en outre l'étape consistant à :

50

faire la distinction entre les boutons de mouvement de curseur et les boutons de sélection de menu en observant visuellement la couleur des boutons.

8. Procédé selon les revendications 5, 6, ou 7, dans lequel les boutons de mouvement de curseur sont chacun biseautés et l'étape consistant à déplacer le curseur de menu comporte en outre l'étape consistant à :

55

identifier un bouton de mouvement de curseur en sentant physiquement la direction dans laquelle le bouton de mouvement de curseur est biseauté.

9. Procédé selon l'une quelconque des revendications 1 à 8, dans lequel les boutons de sélection de menu ont

chacun une icône disposée dessus représentant une catégorie de programmes, et dans lequel l'étape consistant à enfoncer l'un des boutons de sélection de menu comporte l'étape consistant à :

5 identifier le bouton de sélection de menu à enfoncer en observant visuellement une icône située sur le bouton de sélection de menu qui correspond à la catégorie de programmes que l'on souhaite sélectionner.

10. Télécommande destinée à être utilisée avec un terminal ST, le terminal ST générant une pluralité de menus qui peuvent être séquencés à partir d'un menu principal jusqu'à un premier niveau de menus et jusqu'à un second niveau de menus, la télécommande comportant :

10 une première section destinée à fournir des fonctions de télécommande de télévision, et comportant :

15 au moins un bouton de commande de volume,
au moins un bouton de sélection de canal, et
au moins un bouton de mise en service,
une seconde section destinée à fournir des fonctions d'accès aux menus comportant :

20 une pluralité de boutons de sélection de menu pour sélectionner directement des menus de second niveau, chaque bouton de sélection de menu correspondant à l'un des menus de second niveau de sorte que l'enfoncement de l'un des boutons de sélection de menu sélectionne directement le menu de second niveau correspondant sans effectuer un accès aux menus de premier niveau, et des moyens de mouvement de curseur pour déplacer un curseur sur la pluralité de menus,

25 dans laquelle la première section commande les fonctions de volume, de canal et de mise en service d'une télévision,

et dans laquelle la seconde section étend la première section pour fournir une télécommande intégrée ayant des fonctions de volume, de canal, de mise en service, de sélection de menu, et de mouvement de curseur.

30 11. Télécommande selon la revendication 10, dans laquelle la pluralité de boutons de sélection de menu sont colorés différemment des moyens de mouvement de curseur.

12. Télécommande selon les revendications 10 ou 11, dans laquelle les moyens de mouvement de curseur sont texturés.

35 13. Télécommande selon les revendications 10, 11, ou 12, comportant en outre des moyens pour communiquer avec le terminal ST et dans laquelle la sélection d'un bouton quelconque de la pluralité de boutons de sélection de menu lance la génération d'un menu parmi la pluralité de menus par le terminal ST.

40 14. Télécommande selon l'une quelconque des revendications 10 à 13, dans laquelle les première et seconde sections sont physiquement séparables et les moyens de mouvement de curseur comportent une pluralité de boutons de mouvement de curseur.

45 15. Télécommande selon l'une quelconque des revendications 10 à 14, dans laquelle les moyens de mouvement de curseur comportent un groupe de quatre boutons directionnels.

16. Télécommande selon les revendications 14 ou 15, dans laquelle les boutons de mouvement de curseur sont biseautés.

50 17. Système d'interface destiné à recevoir une pluralité de signaux de télévision et à générer une pluralité de menus incluant des menus principaux et des sous-menus, chacun de la pluralité de menus utilisant des données de contenu de menu, le système d'interface comportant :

55 un terminal ST pour traiter les données de contenu de menu et générer des menus,
une unité de télécommande pour effectuer la génération de menus du terminal ST comportant :

des boutons de sélection de menu pour sélectionner directement l'un des sous-menus parmi la pluralité de sous-menus, chaque bouton de sélection de menu représentant un sous-menu différent disponible pour la sélection, dans lequel le sous-menu sélectionné est directement sélectionné en enfonçant le bou-

ton de sélection de menu qui correspond à ce sous-menu sélectionné sans tout d'abord sélectionner l'un des menus principaux, et des moyens, couplés aux boutons de sélection de menu, pour communiquer avec le terminal ST, l'enfoncement du bouton de sélection de menu qui correspond au sous-menu sélectionné amenant le terminal ST à générer le sous-menu sélectionné.

5

18. Système d'interface selon la revendication 17, dans lequel au moins l'un des signaux de télévision reçus inclut un signal d'informations de commande de programme numérique, et dans lequel une partie des données de contenu de menu est portée sur un signal d'informations de commande de programme numérique.

10

19. Système d'interface selon les revendications 17 ou 18, dans lequel les boutons de sélection de menu comportent en outre des icônes représentant les différents sous-menus et dans lequel chaque bouton de sélection de menu inclut une icône représentant l'un des différents sous-menus.

15

20. Système d'interface selon l'une quelconque des revendications 17 à 19, dans lequel certains menus de la pluralité de menus ont des options de menu, la télécommande comportant :

des moyens pour choisir une option quelconque parmi les options de menu.

20

21. Système d'interface selon l'une quelconque des revendications 17 à 20, comportant en outre une télévision pour afficher visuellement le sous-menu sélectionné.

22. Système d'interface selon l'une quelconque des revendications 17 à 21, dans lequel certains menus de la pluralité de menus et de sous-menus ont un curseur et dans lequel l'unité de télécommande comporte en outre :

25

des boutons de mouvement de curseur, couplés aux moyens de communication, pour amener un curseur à changer de position sur le menu ou le sous-menu sélectionné.

23. Système d'interface selon la revendication 22, dans lequel les boutons de sélection de menu sont colorés différemment des boutons de mouvement de curseur.

30

24. Système d'interface selon les revendications 22 ou 23, dans lequel les boutons de mouvement de curseur sont texturés.

35

25. Système d'interface selon l'une quelconque des revendications 17 à 24, dans lequel le terminal ST utilise des instructions de programme et comporte en outre :

des moyens pour recevoir un signal de programmation de télévision, des moyens pour générer des menus, incluant des menus principaux et des sous-menus, en utilisant le signal de programmation de télévision,

40

des moyens pour recevoir des communications provenant de l'unité de télécommande, des moyens pour réaliser l'ordre d'exécution des instructions de programme en utilisant les communications reçues, et

45

des moyens pour effectuer un séquençement à travers les menus principaux et les sous-menus, en utilisant les communications de télécommande reçues.

26. Unité de télécommande destinée à être utilisée avec un terminal ST générant une pluralité de menus, chaque menu affichant un ensemble d'options de menu, la pluralité de menus étant divisée en au moins deux niveaux de menus, un premier niveau de menus et un second niveau de menus, l'unité de télécommande comportant :

50

des boutons de sélection de menu pour sélectionner l'un des menus de second niveau, chaque bouton de sélection de menu représentant l'un des menus de second niveau, l'enfoncement du bouton de sélection de menu qui représente le menu de second niveau sélectionné effectuant un accès directement à ce menu de second niveau et contournant le premier niveau de menus, et

55

des moyens, couplés aux boutons de sélection de menu, pour communiquer avec le terminal ST, la sélection de l'un quelconque des boutons de sélection de menu étant communiquée au terminal ST en effectuant la génération de menus dans le terminal ST et en provoquant la génération du menu de second niveau sélectionné.

27. Télécommande selon la revendication 26, dans laquelle certains menus utilisent un curseur pouvant être déplacé; la télécommande comportant en outre :

des boutons de mouvement de curseur pour amener le curseur à se déplacer sur les menus.

5

28. Télécommande selon les revendications 26 ou 27, dans laquelle certains menus sont générés en utilisant des données de contenu de menu, et dans laquelle le terminal ST reçoit un signal d'informations de commande de programme numérique contenant au moins une partie des données de contenu de menu.

10

29. Télécommande selon l'une quelconque des revendications 26 à 28, dans laquelle le second niveau de menus inclut des menus de catégories de programmes qui correspondent à des catégories de programmes dans lesquelles les programmes de même type sont regroupés ensemble pour la sélection, et utilisant des icônes pour indiquer les catégories de programmes, chaque bouton de sélection de menu comportant en outre une icône pour indiquer visuellement le menu de catégories de programmes représenté par le bouton de sélection de menu.

15

30. Unité de télécommande selon l'une quelconque des revendications 26 à 29, comportant en outre une manette pour déplacer un curseur sur les menus.

20

31. Unité de télécommande selon l'une quelconque des revendications 26 à 30, comportant en outre une boule pour déplacer un curseur sur les menus.

32. Unité de télécommande selon l'une quelconque des revendications 26 à 31, comportant en outre un bouton roulant pouvant être enfoncé pour déplacer un curseur sur les menus.

25

33. Unité de télécommande selon l'une quelconque des revendications 27 à 32, dans laquelle les boutons de sélection de menu sont colorés différemment des boutons de mouvement de curseur.

34. Unité de télécommande selon l'une quelconque des revendications 27 à 33, dans laquelle les boutons de mouvement de curseur sont texturés.

30

35. Télécommande selon l'une quelconque des revendications 27 à 34, comportant en outre un bouton de validation, dans laquelle les boutons de mouvement de curseur comportent quatre boutons de mouvement de curseur directionnels et dans laquelle un premier bouton de mouvement de curseur directionnel s'oppose à un deuxième bouton de mouvement de curseur directionnel le long de la longueur de la télécommande pour former une paire longitudinale de boutons directionnels et un troisième bouton de mouvement de curseur directionnel s'oppose à un quatrième bouton de mouvement de curseur directionnel transversal à la télécommande pour former une paire transversale de boutons directionnels, et dans laquelle les paires longitudinale et transversale de boutons directionnels sont centrées et perpendiculaires l'une à l'autre avec le bouton de validation positionné dans une zone située entre les paires longitudinale et transversale de boutons directionnels, et

35

40

dans laquelle chacun des quatre boutons de mouvement de curseur directionnels comporte une face biseautée où la face biseautée est en biais dans le sens descendant vers le bouton de validation.

36. Télécommande selon la revendication 35, dans laquelle le bouton de validation est encastré au-dessous de la face biseautée des quatre boutons de mouvement de curseur directionnels.

45

37. Télécommande selon l'une quelconque des revendications 26 à 36, dans laquelle la télécommande comporte en outre des boutons standards, un bouton de validation et des boutons de télévision payante, et dans laquelle :

les boutons standards comportent des boutons de sélection de canal, de volume, et de source de signal, et les boutons standards sont longitudinalement séparés des boutons de curseur, de validation, de sélection de menu et de télévision payante.

50

38. Télécommande selon l'une quelconque des revendications 26 à 37, dans laquelle la télécommande comporte en outre des boutons standards, des boutons de mouvement de curseur, un bouton de validation et des boutons de télévision payante, et dans laquelle :

55

les boutons standards comportent des boutons de sélection de canal, de volume, et de source de signal, et les boutons standards sont transversalement séparés des boutons de mouvement de curseur, de validation,

de sélection de menu, et de télévision payante.

39. Unité de télécommande selon l'une quelconque des revendications 26 à 38, comportant en outre un bouton de validation pour sélectionner une option de menu.
- 5 40. Unité de télécommande selon l'une quelconque des revendications 35 à 39, dans laquelle le bouton de validation est coloré différemment des boutons de sélection de menu.
- 10 41. Unité de télécommande selon l'une quelconque des revendications 26 à 40, dans laquelle l'unité de télécommande comporte en outre des boutons standards, et dans laquelle les boutons de sélection de menu peuvent être physiquement distingués des boutons standards.
- 15 42. Unité de télécommande selon l'une quelconque des revendications 26 à 37 ou 39 à 41, dans laquelle la télécommande contient une pluralité de boutons, incluant un groupe standard comportant des boutons de commande de volume et de sélection de canal, et un groupe spécial incluant des boutons de mouvement de curseur et les boutons de sélection de menu, où les deux groupes de boutons sont physiquement séparés l'un de l'autre sur l'unité de télécommande par une ligne située au centre de gravité de l'unité de télécommande ou au-dessus de celui-ci.
- 20 43. Unité de télécommande selon l'une quelconque des revendications 26 à 42, comportant en outre une pluralité de boutons standards, et dans laquelle au moins un bouton de sélection de menu est coloré différemment des boutons standards.
- 25 44. Télécommande selon l'une quelconque des revendications 26 à 43, dans laquelle des icônes sont utilisées, chaque bouton de sélection de menu comportant en outre une icône pour indiquer visuellement le menu de second niveau représenté par le bouton de sélection de menu.
- 30 45. Unité de télécommande selon l'une quelconque des revendications 26 à 44, dans laquelle le second niveau de menus inclut des menus de catégories de programmes qui correspondent à des catégories de programmes dans lesquelles des programmes de même type sont regroupés ensemble pour la sélection, et dans laquelle le premier niveau de menus contient une ou plusieurs options de menu pour sélectionner un menu de second niveau, la télécommande comportant en outre :

des boutons de mouvement de curseur pour déplacer un curseur sur au moins le premier niveau de menus pour recouvrir une option de menu, et
35 un bouton de validation pour sélectionner une option de menu qui est recouverte par le curseur, et

dans laquelle un menu de catégories de programmes peut être sélectionné soit en utilisant les boutons de sélection de menu soit les boutons de mouvement de curseur et le bouton de validation.
- 40 46. Unité de télécommande selon l'une quelconque des revendications 26 à 45, comportant un ou plusieurs niveaux de menus supplémentaires, dans laquelle un ou plusieurs boutons de sélection de menu comportent chacun une icône représentant un menu de catégories de programmes, et dans laquelle quatre boutons de mouvement de curseur directionnels et un bouton de validation sont utilisés pour effectuer un séquençement à travers des niveaux de menus adjacents et chaque bouton de sélection de menu est utilisé pour effectuer un accès directement à un menu de catégories de programmes correspondant à la catégorie représentée par son icône.
- 45 47. Unité de télécommande selon l'une quelconque des revendications 26 à 46, dans laquelle un ou plusieurs menus du second niveau de menus peuvent être sélectionnés à partir d'options de menu affichées sur le premier niveau de menus, la télécommande comportant en outre :

50 une pluralité de boutons standards,
des boutons de mouvement de curseur pour déplacer un curseur à travers les options de menu présentées sur le premier niveau de menus,
un bouton de validation pour sélectionner une option de menu correspondant à l'emplacement du curseur, et
55 dans laquelle les boutons de mouvement de curseur, le bouton de validation, et les boutons de sélection de menu sont couplés aux moyens de communication et peuvent être physiquement distingués les uns des autres et des boutons standards par le toucher, ce qui permet à un utilisateur d'avoir facilement accès à un bouton de

mouvement de curseur, au bouton de validation ou à un bouton de sélection de menu, et d'appuyer sur l'un de ces derniers, sans regarder l'unité de télécommande.

48. Unité de télécommande selon l'une quelconque des revendications 26 à 47, dans laquelle un ou plusieurs menus du second niveau de menus peuvent être sélectionnés à partir des options de menu affichées sur le premier niveau de menus, la télécommande comportant en outre :

une face plate ayant des étiquettes,
quatre boutons de mouvement de curseur directionnels, saillant de la face plate et couplés aux moyens de communication, pour déplacer un curseur affiché sur la télévision pour recouvrir une option de menu, et
un bouton de validation, saillant de la face plate et couplé aux moyens de communication, pour choisir l'option de menu actuellement recouverte par le curseur,

dans laquelle l'enfoncement du bouton de validation sur l'unité de télécommande réalise l'exécution d'un logiciel au niveau du terminal ST, et dans laquelle les quatre boutons de mouvement de curseur directionnels et le bouton de validation sont utilisés pour effectuer un séquençement à travers l'un quelconque des menus de second niveau.

49. Unité de télécommande selon l'une quelconque des revendications 27 à 48, comportant en outre des boutons de télévision payante et un bouton de mise en service, et dans laquelle :

les boutons de mouvement de curseur sont texturés,
les boutons de sélection de menu sont les plus grands boutons se trouvant sur la télécommande, et
les boutons de télévision payante, le bouton de mise en service et le bouton de validation sont colorés différemment des autres boutons situés sur la télécommande.

50. Unité de télécommande selon l'une quelconque des revendications 26 à 49, dans laquelle un ou plusieurs menus du second niveau de menu peuvent être sélectionnés à partir d'options de menu affichées sur le premier niveau de menus, et dans laquelle le second niveau de menus inclut des menus de catégories de programmes qui correspondent à des catégories de programmes dans lesquelles des programmes de même type sont regroupés ensemble pour la sélection, la télécommande comportant en outre :

une face plate ayant des étiquettes,
au moins un bouton de mouvement de curseur, saillant de la face plate et couplé aux moyens de communication, pour déplacer un curseur sur les options de menu,
un bouton de validation, saillant de la face plate et couplé aux moyens de communication, pour sélectionner une option de menu à l'emplacement du curseur,
un bouton de mise en service saillant de la face plate et couplé aux moyens de communication, et
des boutons standards incluant un bouton d'incrément de canal, un bouton de décrémentation de canal, et des boutons numériques numérotés de zéro à neuf,

dans laquelle une catégorie de programmes peut être sélectionnée pour être visualisée en utilisant les boutons de sélection de menu ou les boutons de mouvement de curseur.

51. Télécommande selon l'une quelconque des revendications 26 à 50, dans laquelle les boutons de sélection de menu sont situés sur une première section de l'unité de télécommande, la première section comportant en outre :

des moyens de mouvement de curseur pour déplacer un curseur sur des options de menu relatives aux menus, et
des moyens de sélection pour sélectionner l'option de menu à l'emplacement du curseur,

et dans laquelle l'unité de télécommande comporte en outre :

une seconde section comportant :

au moins un bouton de commande de volume,
au moins un bouton de sélection de canal, et
au moins un bouton de mise en service,

dans laquelle la seconde section commande les fonctions de volume, de canal et de mise en service d'une télévision, et

dans laquelle la première section étend la seconde section et est physiquement séparable de la seconde section, et dans laquelle l'unité de télécommande offre une télécommande intégrée dotée de fonctions de volume, de canal, de mise en service, de sélection de menu, et de mouvement de curseur.

52. Télécommande selon l'une quelconque des revendications 10 à 16, dans laquelle chaque bouton de la pluralité de boutons de sélection de menu sélectionne directement un menu parmi une pluralité de menus de catégories de programmes.

53. Télécommande selon la revendication 52, dans laquelle au moins un menu parmi la pluralité de menus de catégories de programmes affiche des programmes destinés à être sélectionnés pour être visualisés.

54. Télécommande selon la revendication 53, dans laquelle des signaux de programme sont reçus au niveau du terminal ST à partir d'une tête de câble et un programme sélectionné pour être visualisé à partir des menus de catégories de programmes est visualisé lorsque les signaux de programme sont reçus.

55. Télécommande selon l'une quelconque des revendications 10 à 16 ou 52 à 54, dans laquelle l'enfoncement de chacun des boutons de sélection de menu exécute une seule fonction.

56. Télécommande selon la revendication 55, dans laquelle chaque enfoncement d'un bouton de sélection de menu particulier sélectionne directement le même menu de catégories de programmes.

57. Système d'interface selon l'une quelconque des revendications 17 à 25, dans lequel les boutons peuvent être enfoncés.

58. Unité de télécommande selon l'une quelconque des revendications 26 à 51, dans laquelle les boutons peuvent être enfoncés.

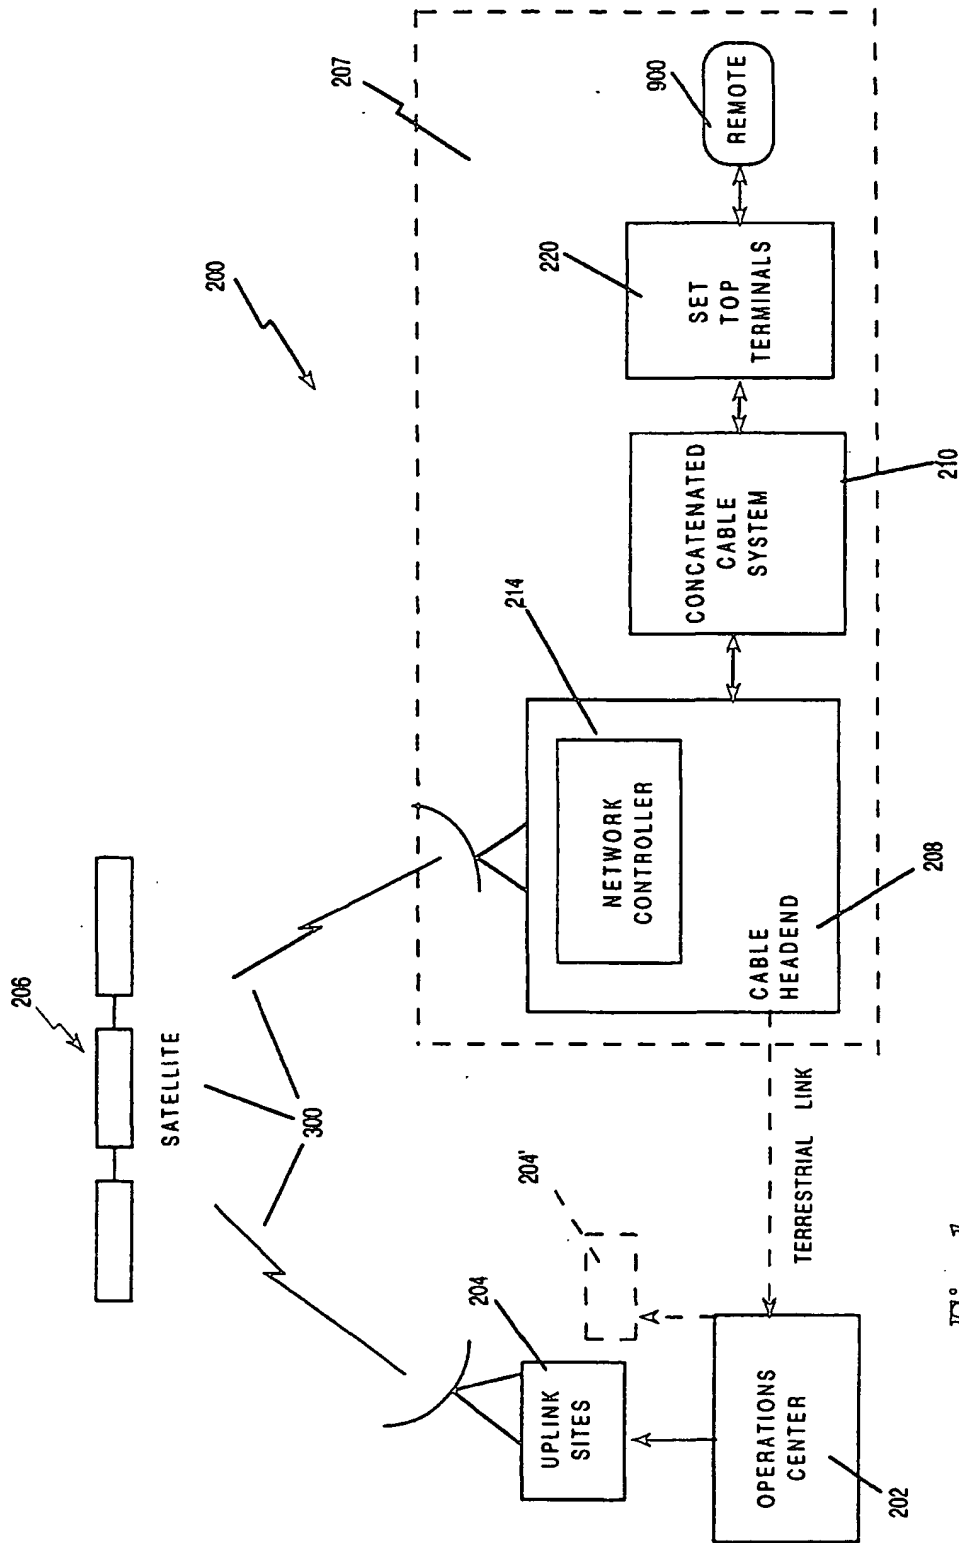


Fig. 1

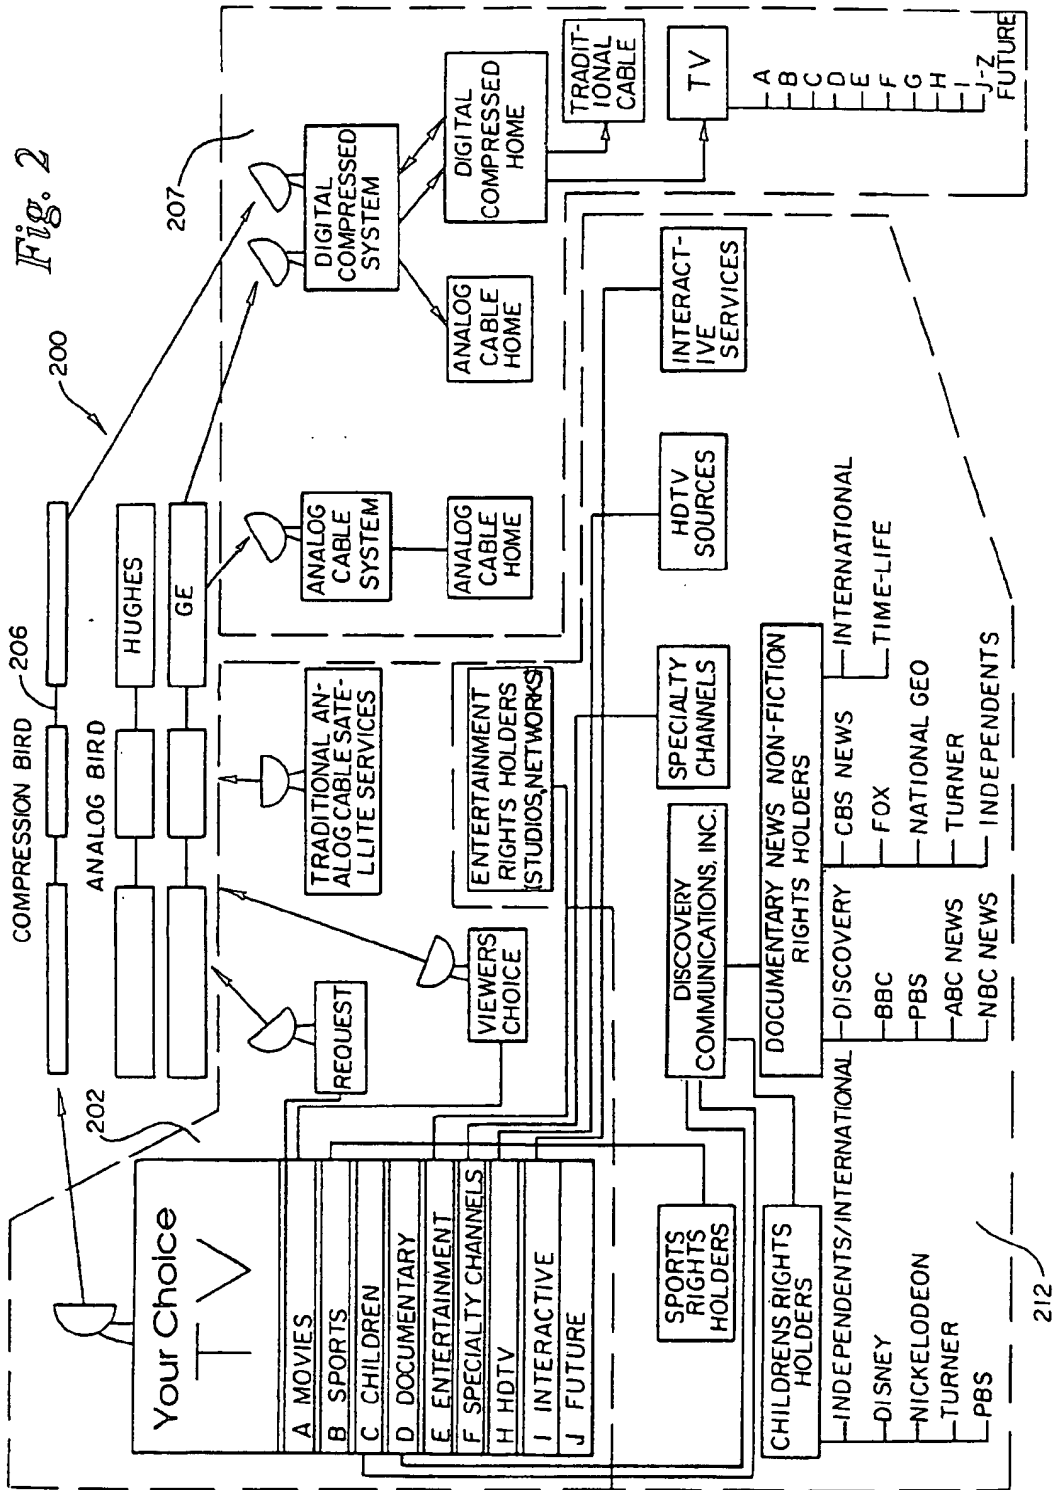
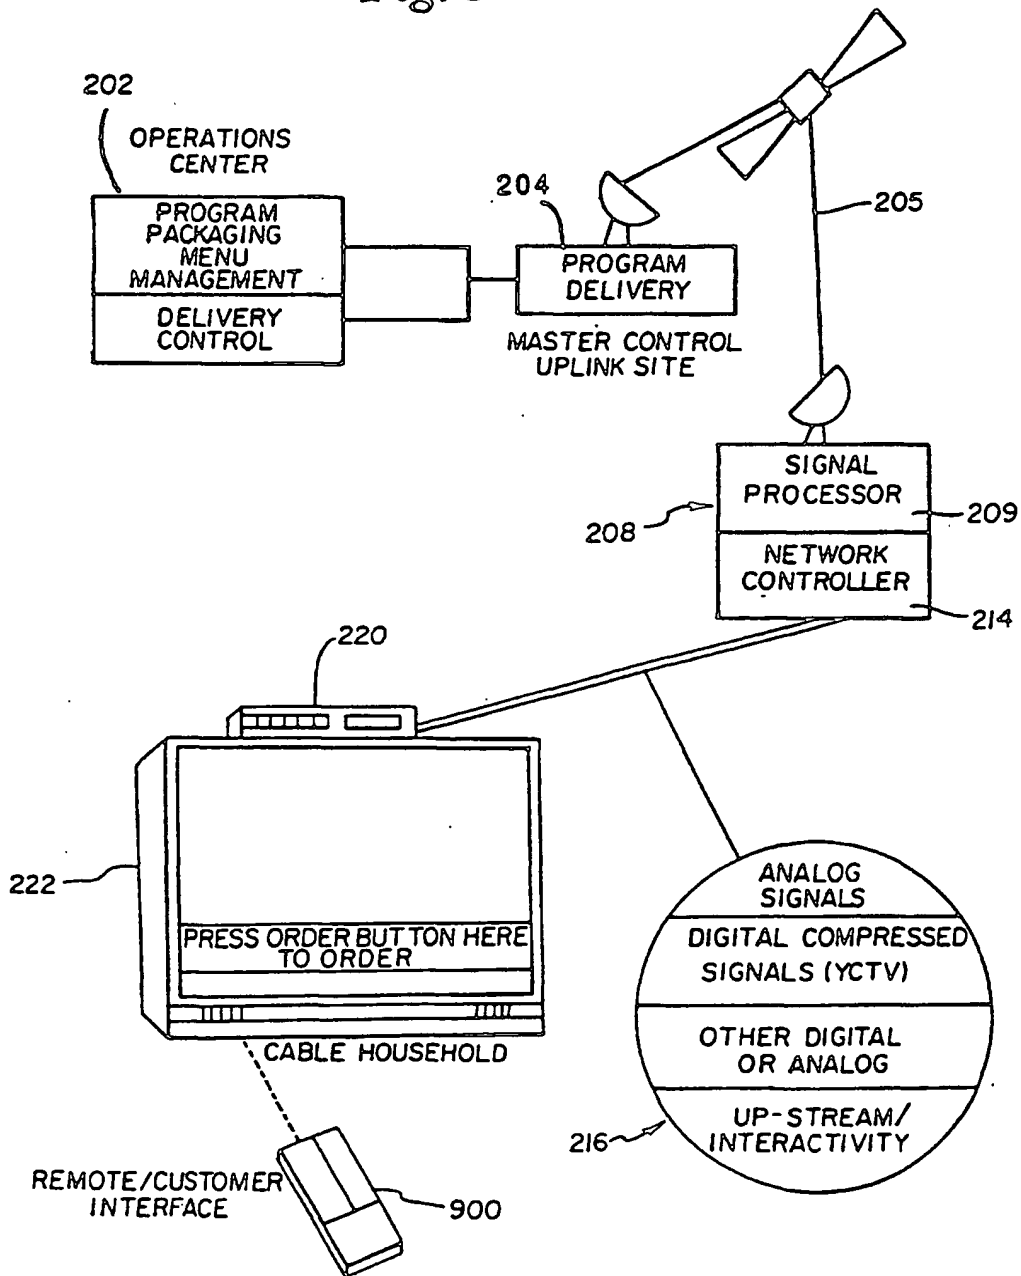


Fig. 3



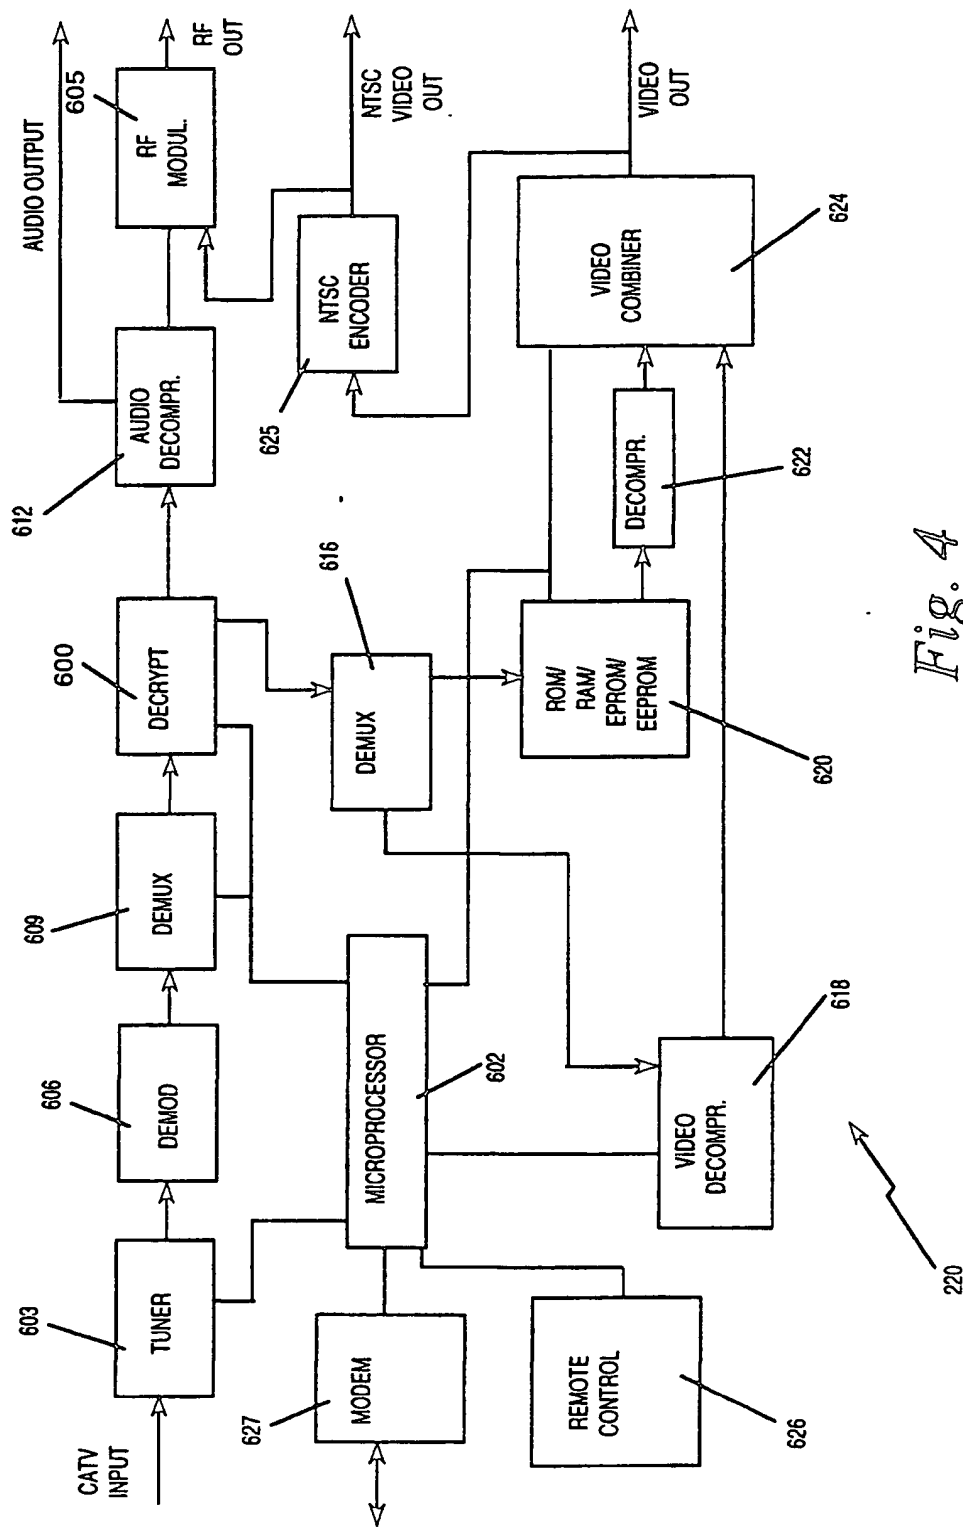


Fig. 4

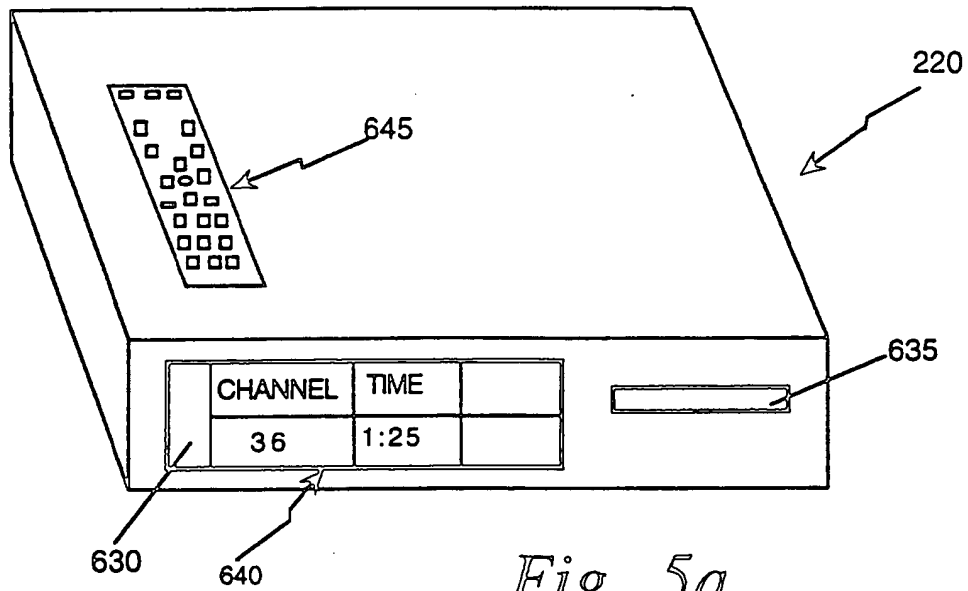


Fig. 5a

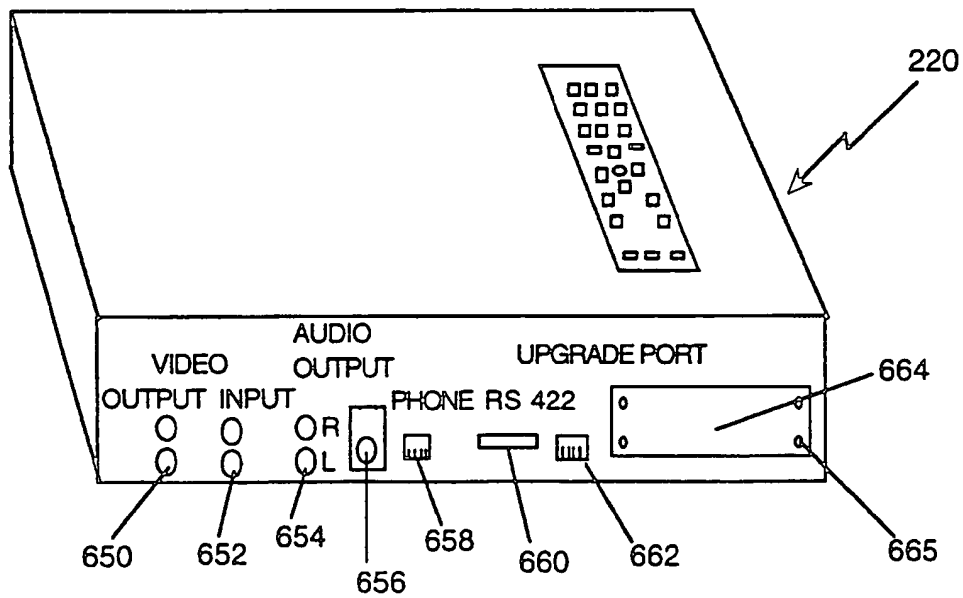


Fig. 5b

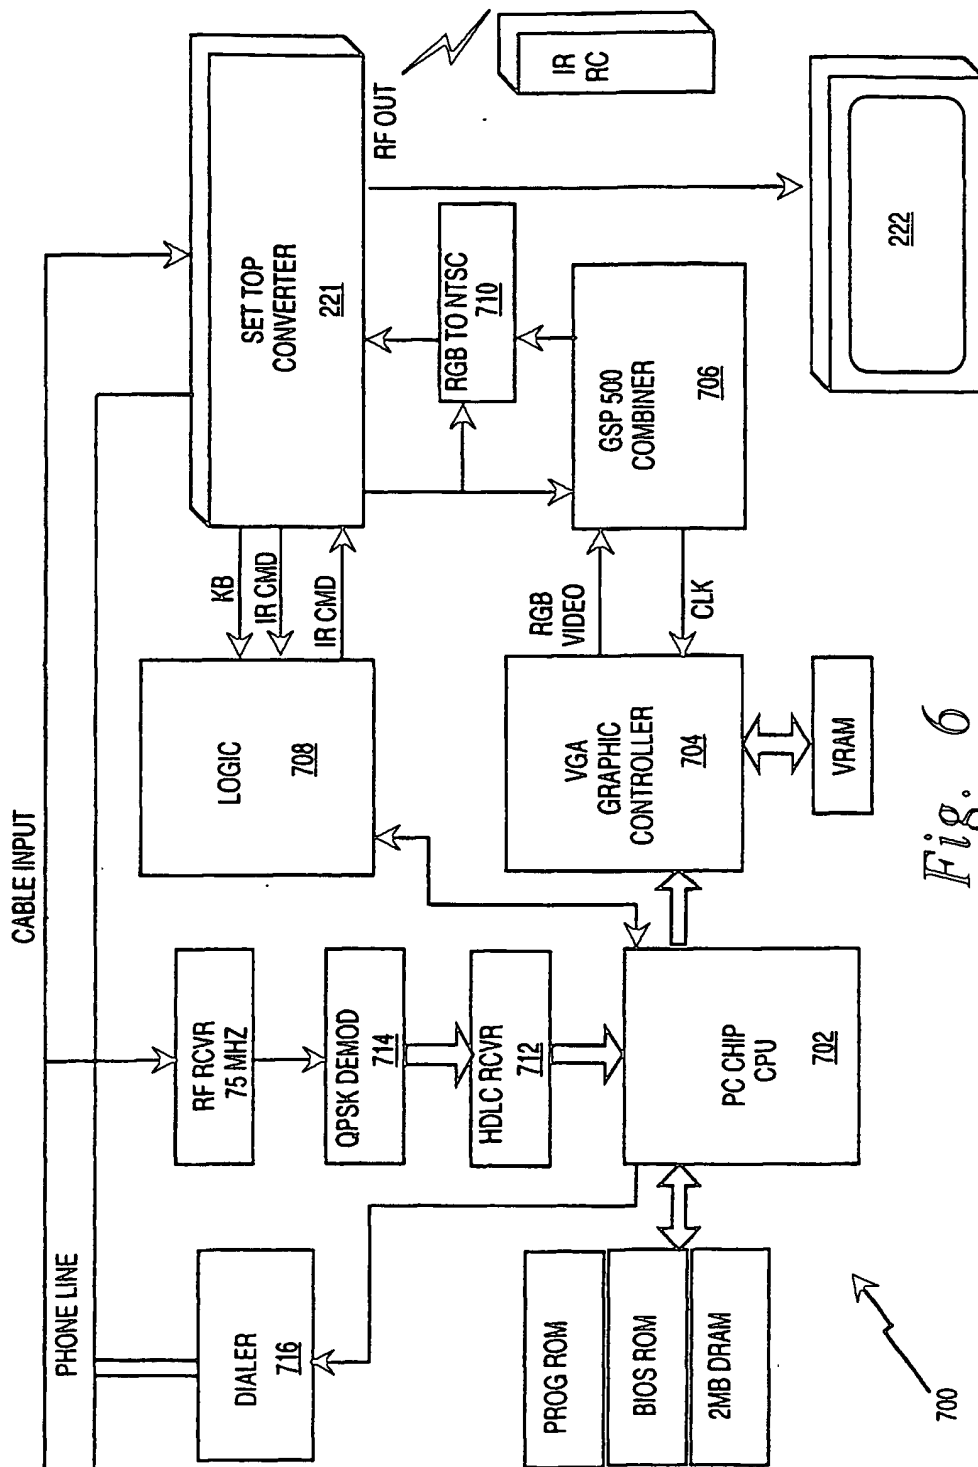
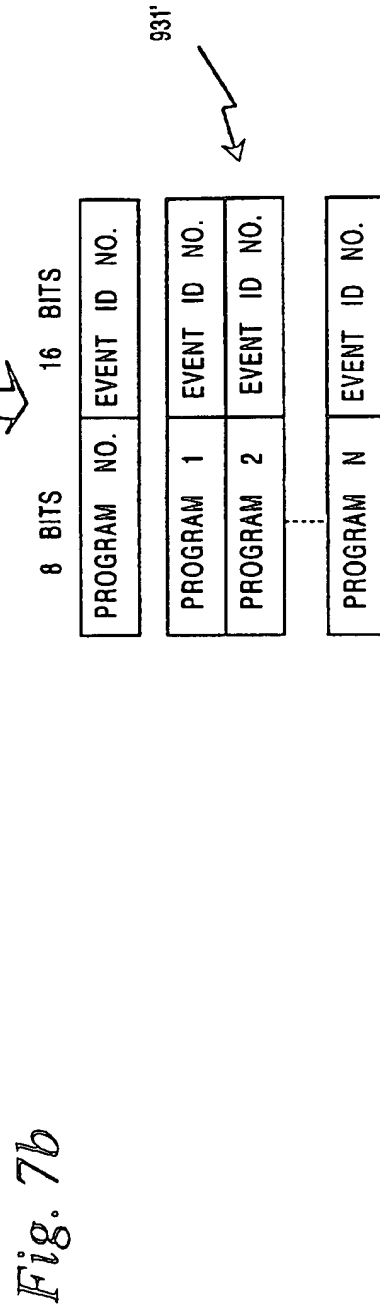
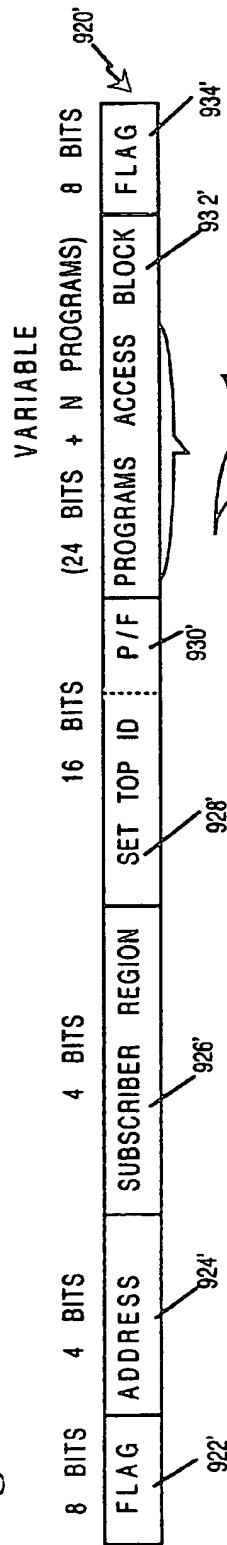
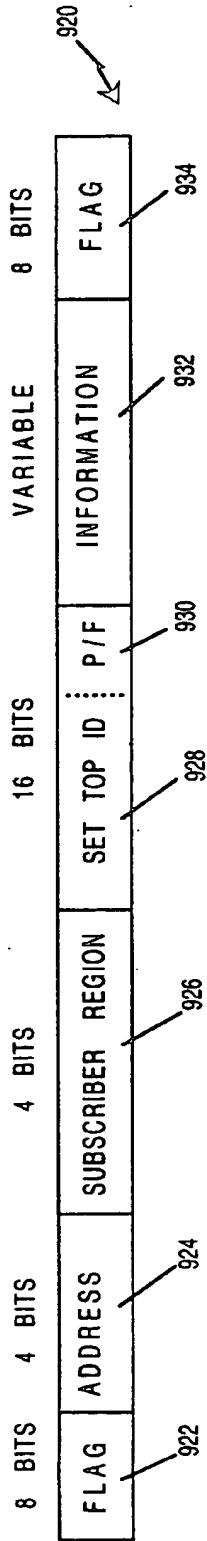


Fig. 6



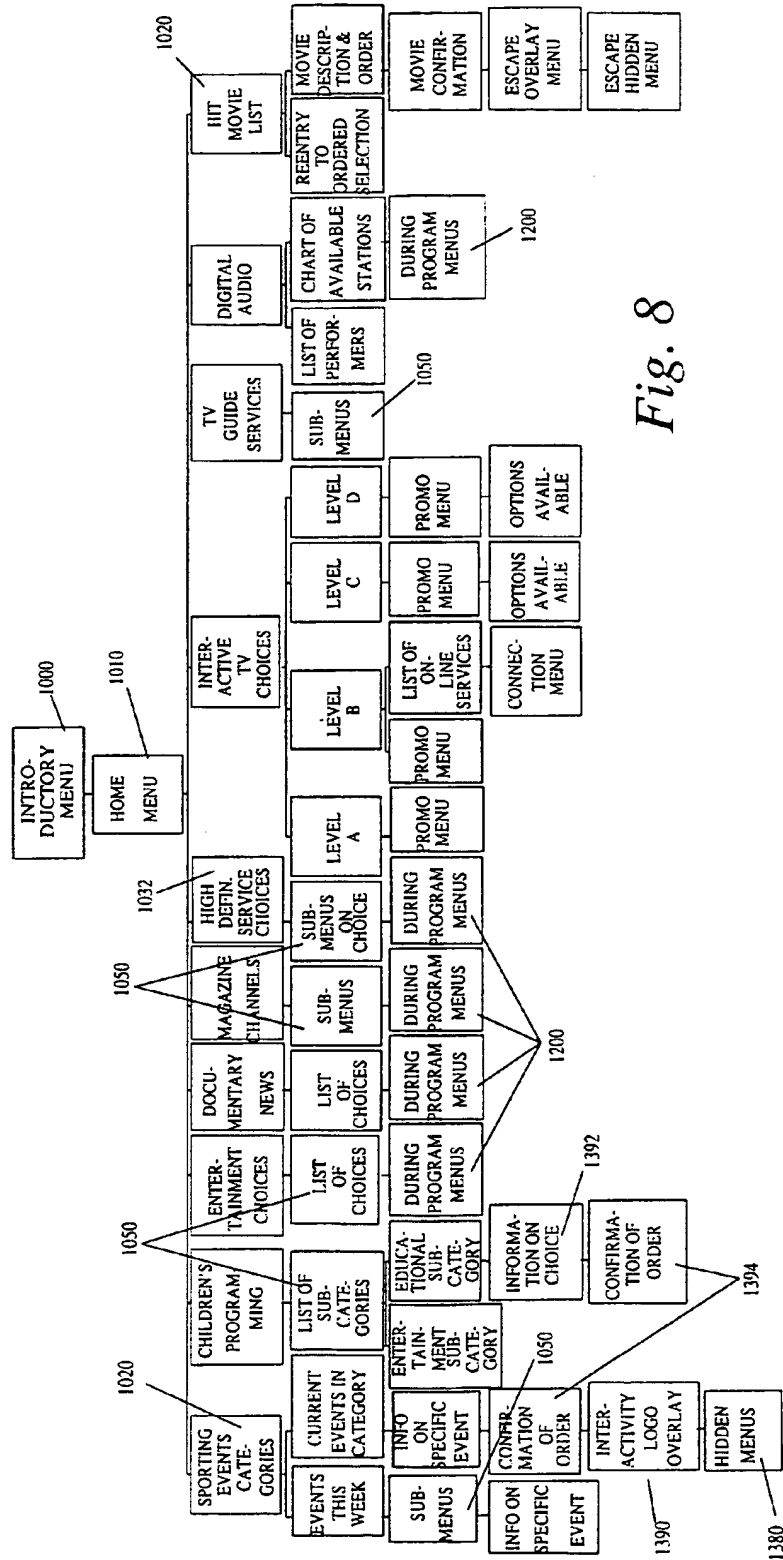


Fig. 8

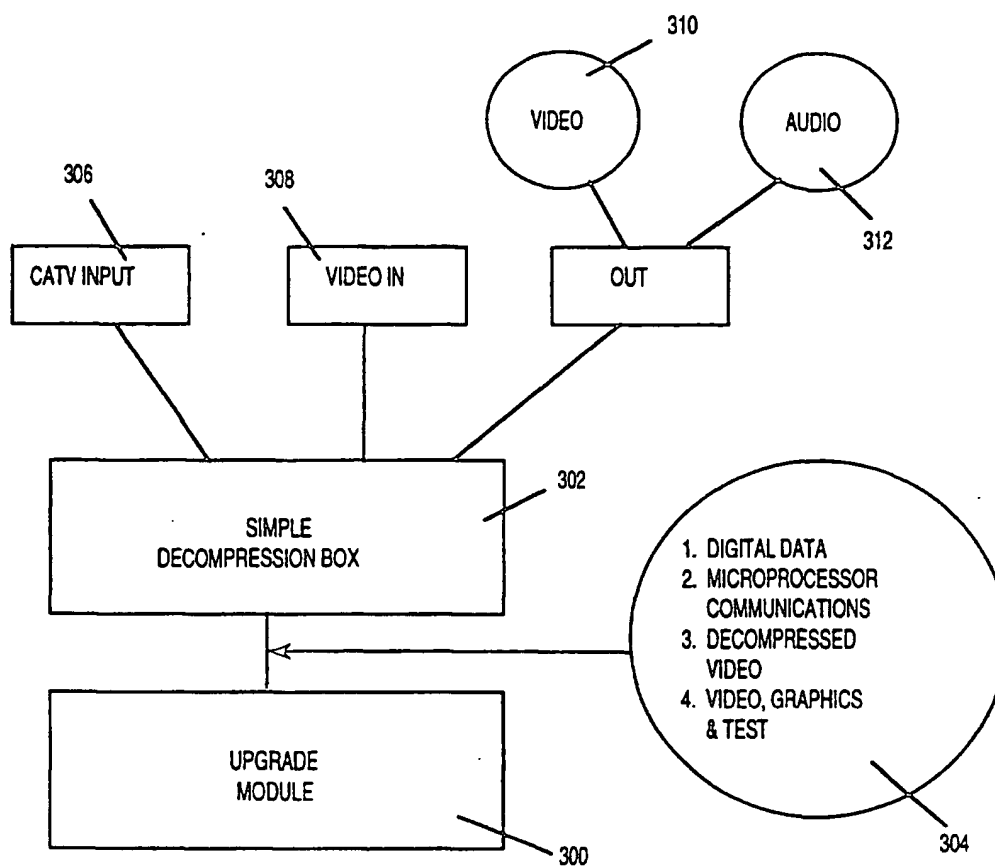


Fig. 9a

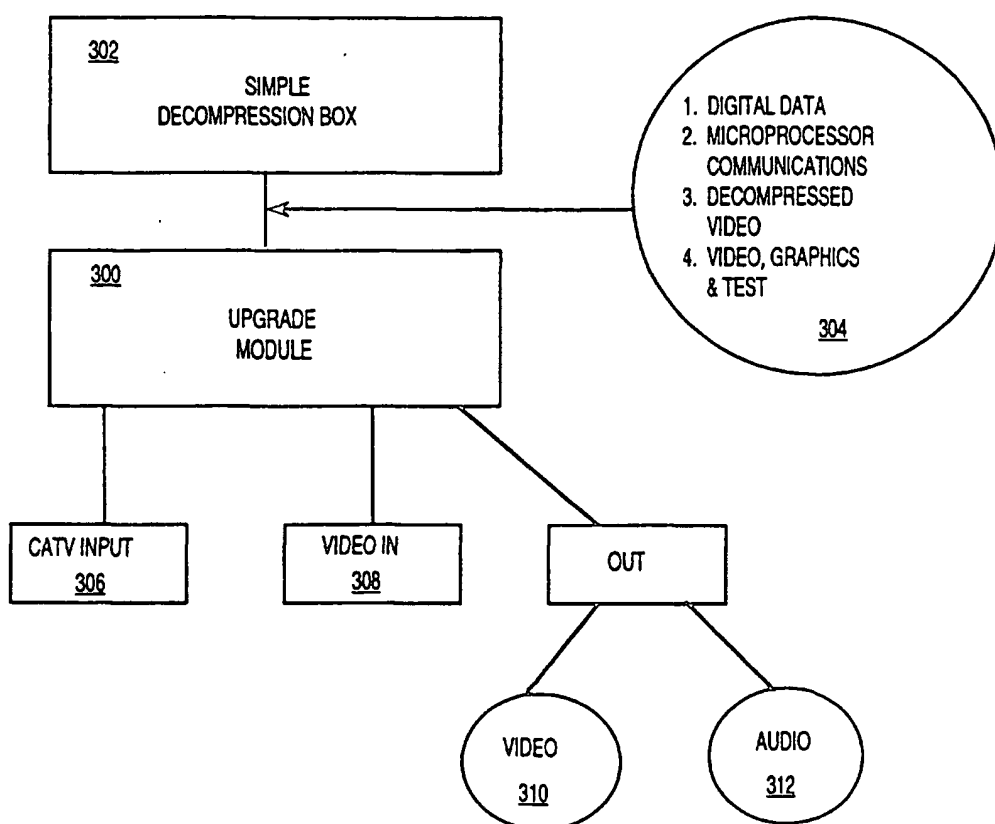
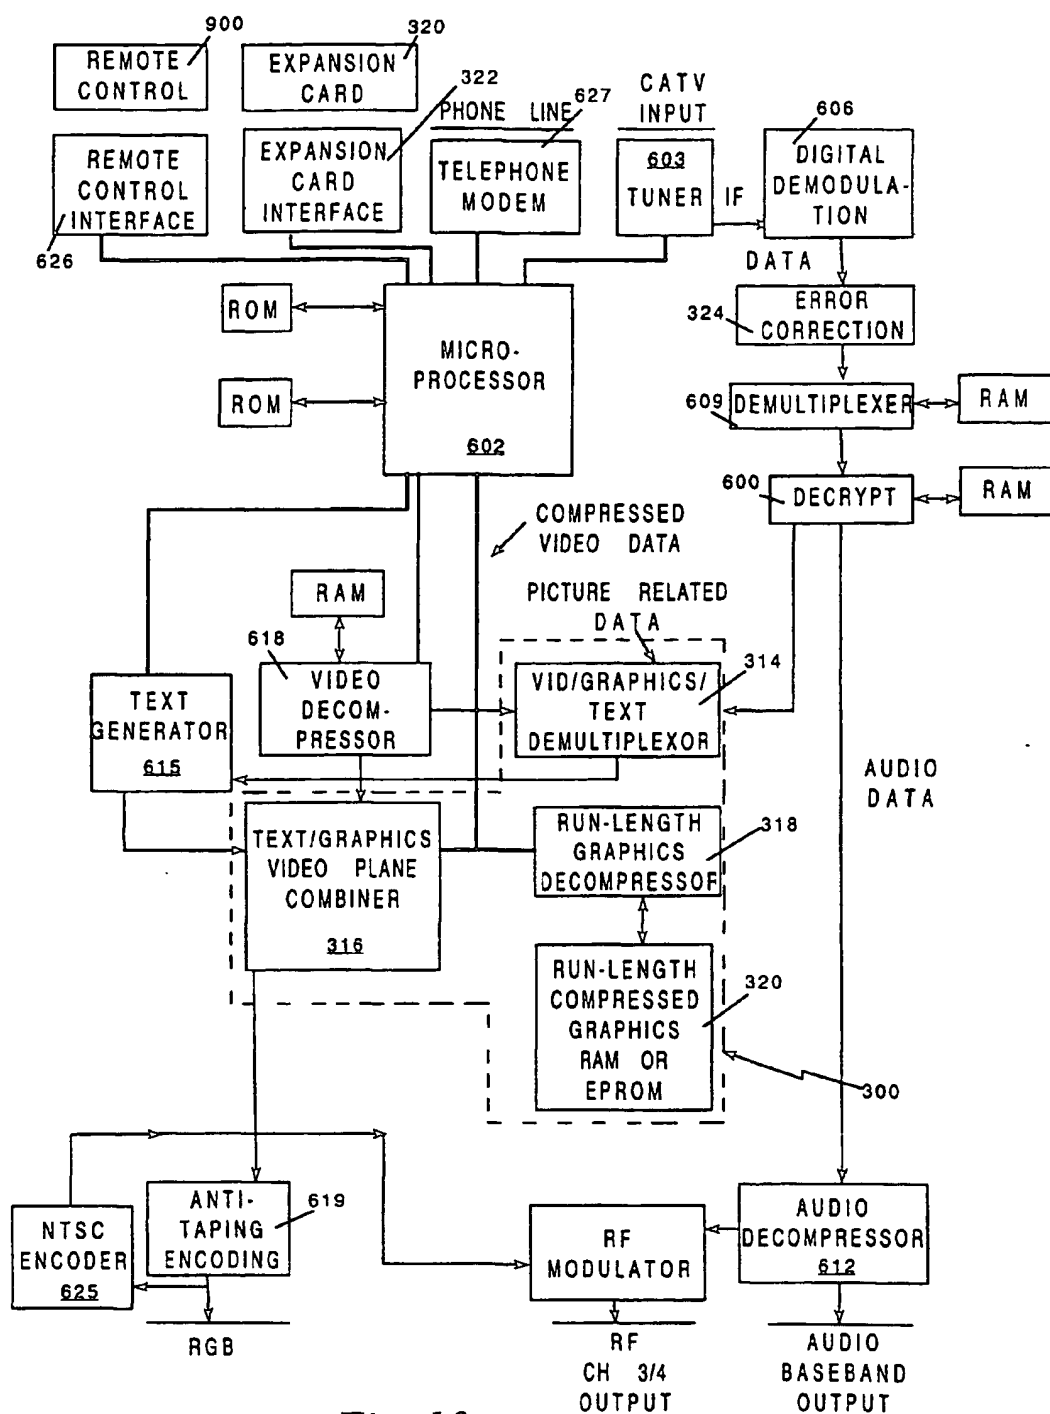


Fig. 9b



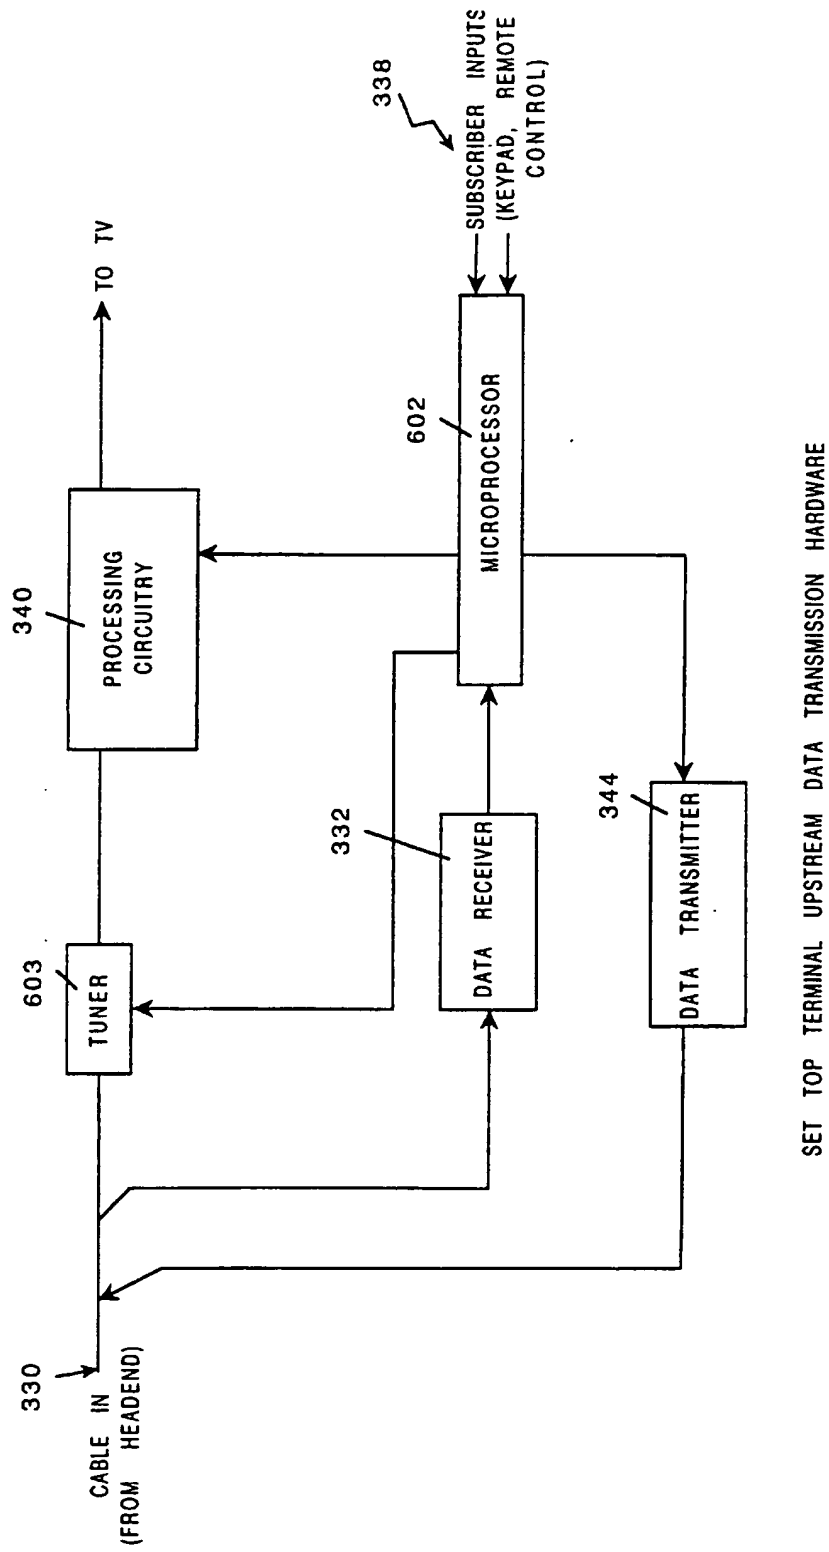


Fig. 11

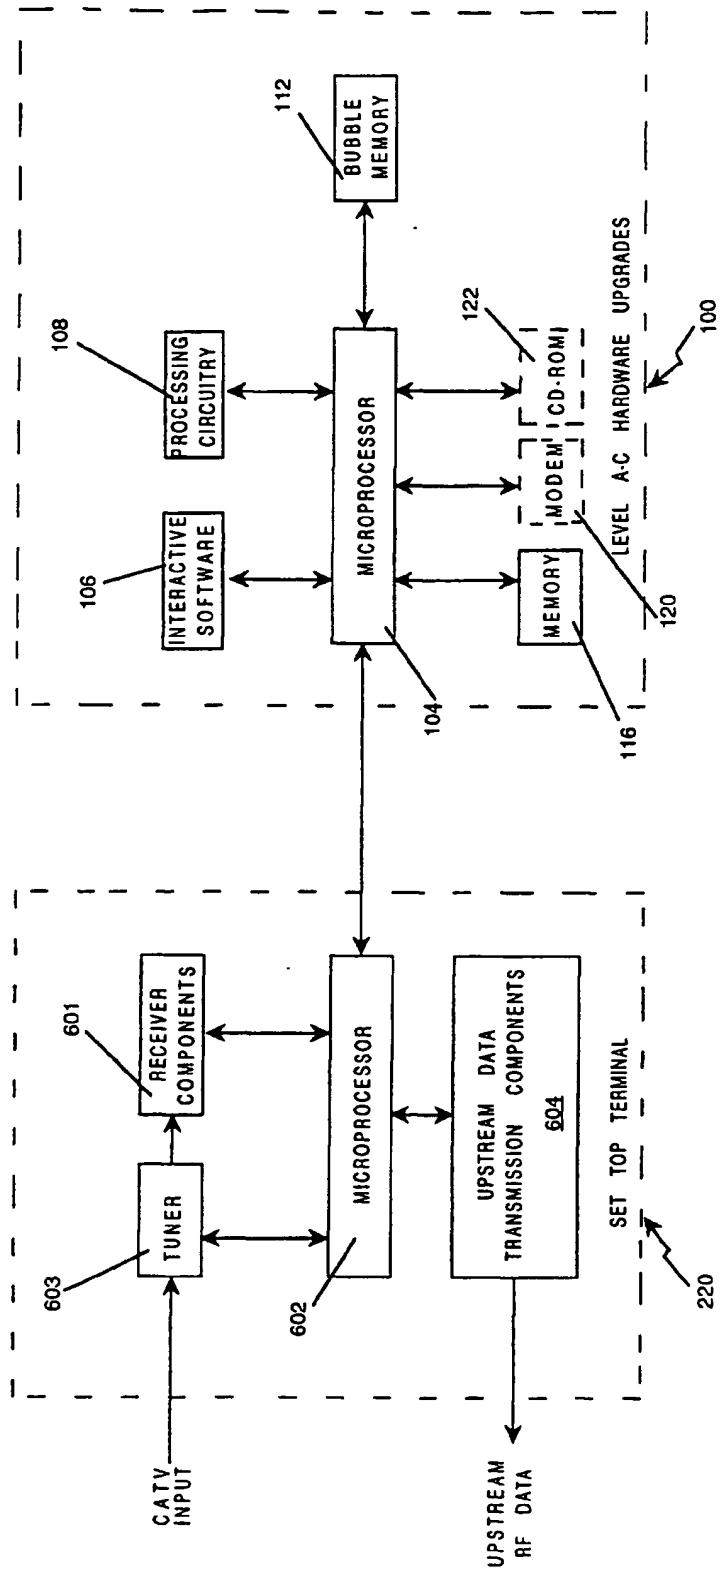


Fig. 12a

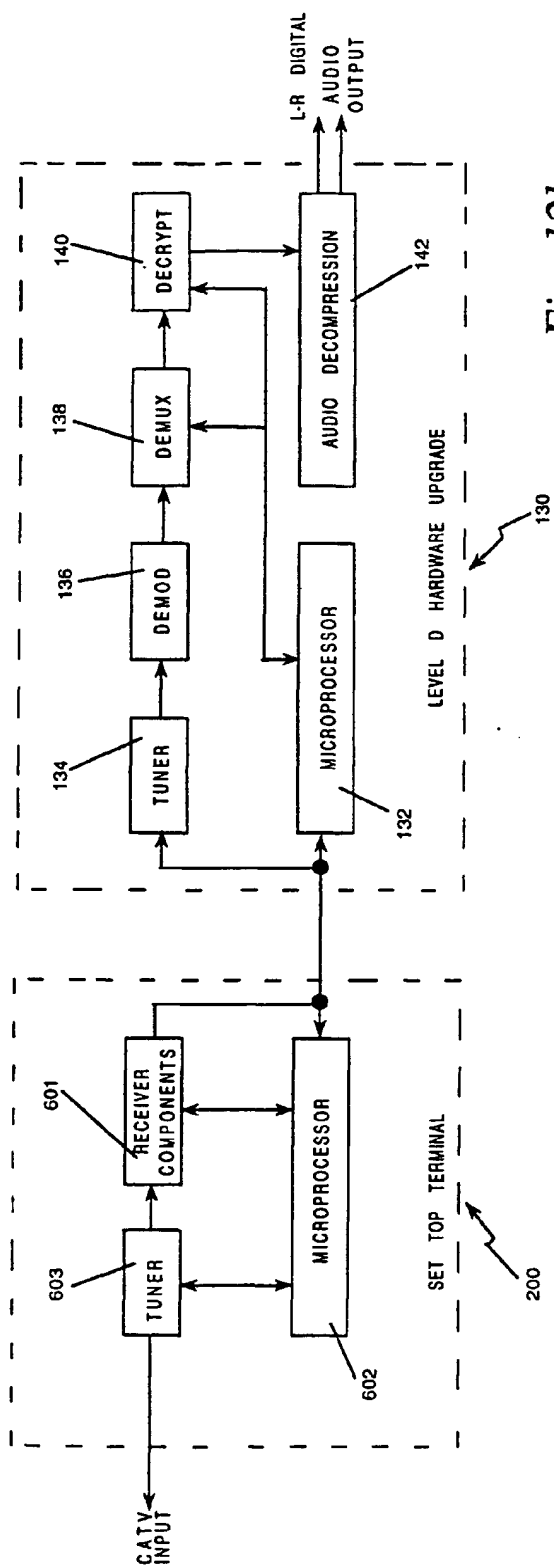


Fig. 12b

Fig. 13a

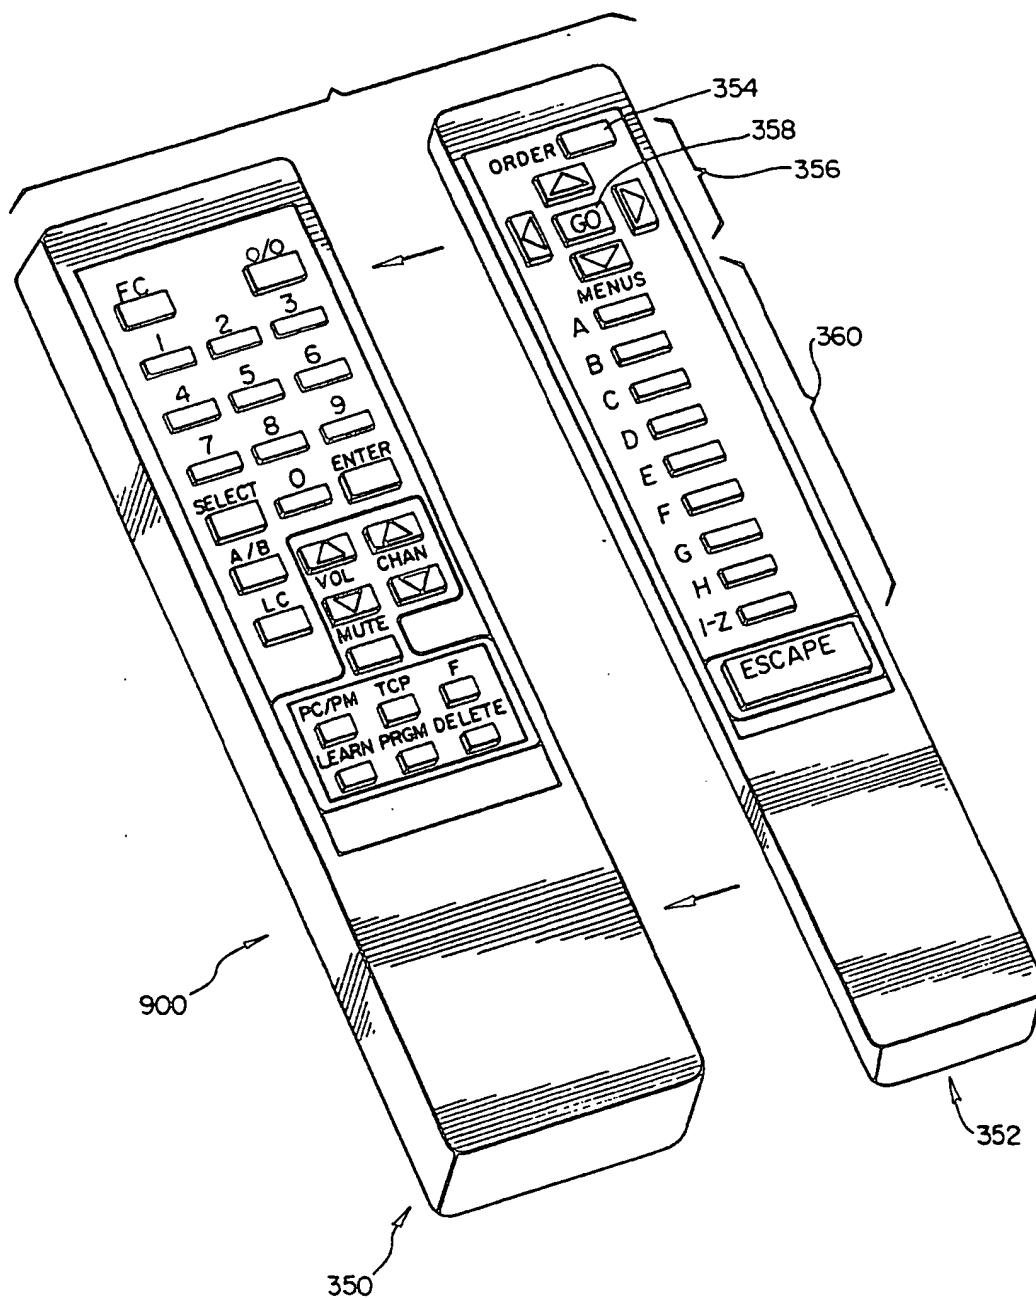
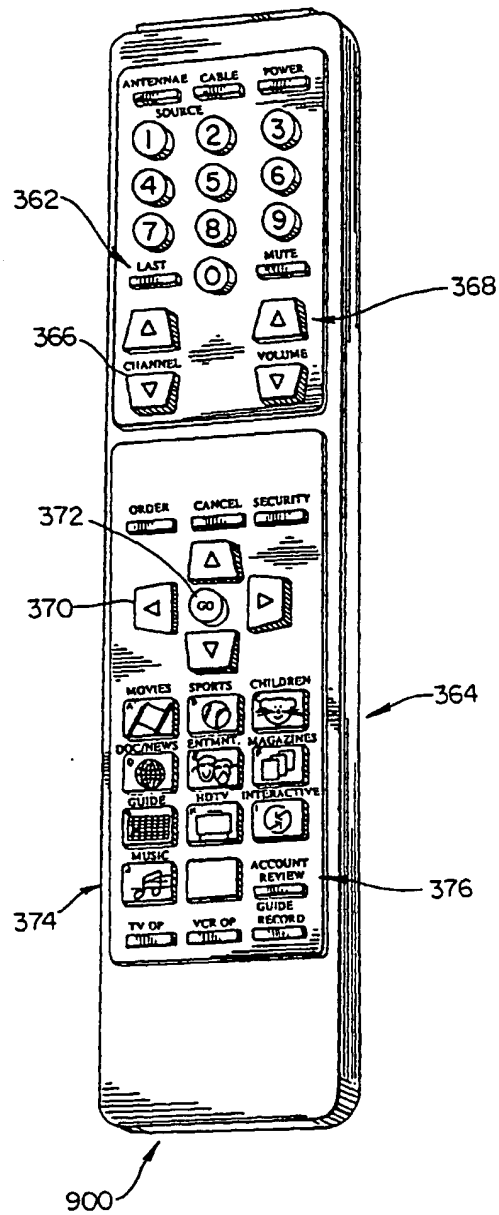


Fig. 13b



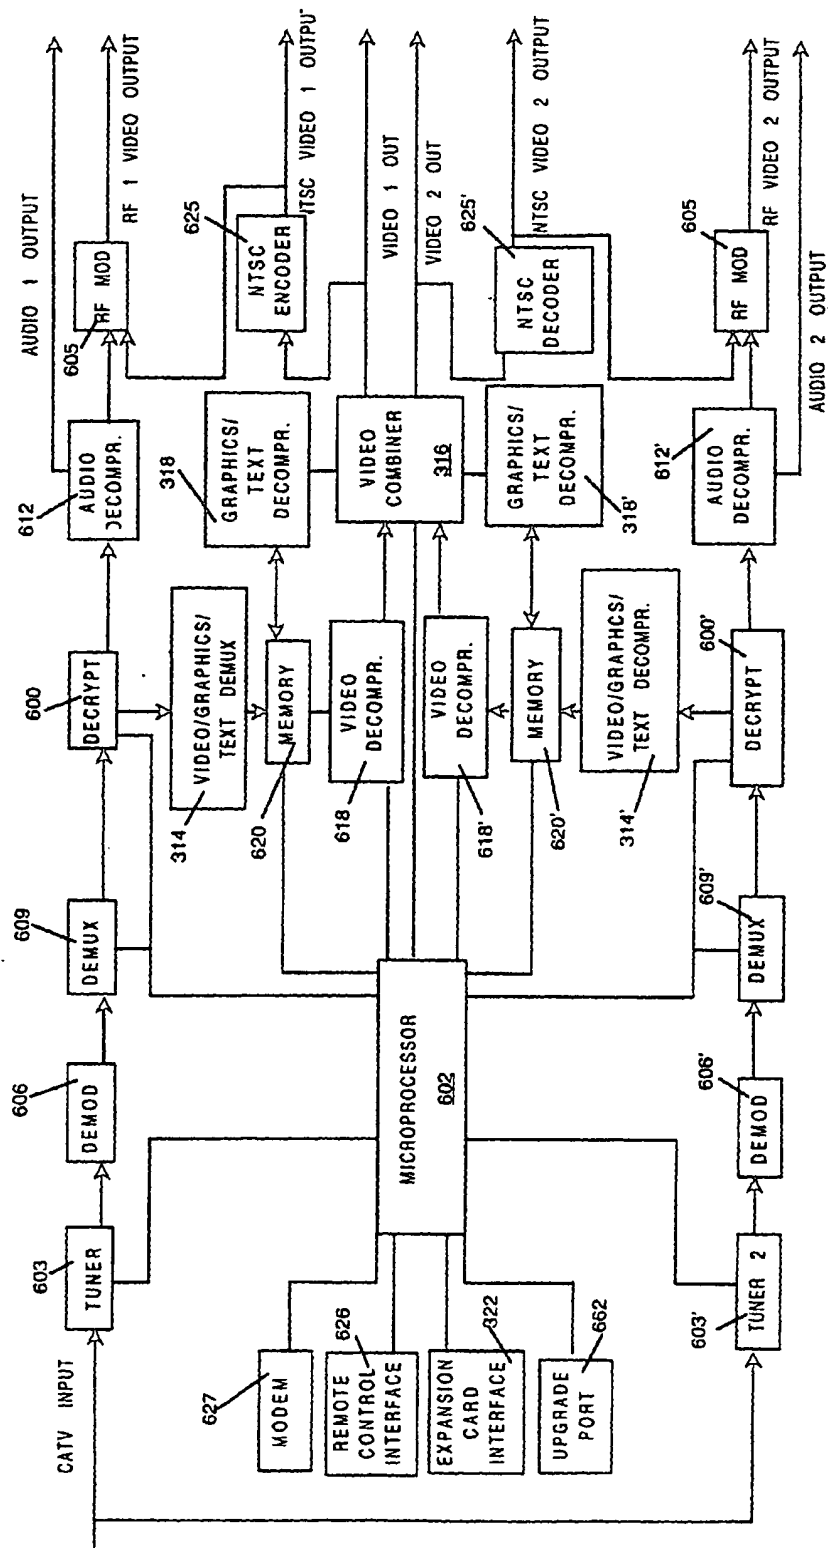


Fig. 14

Fig. 15


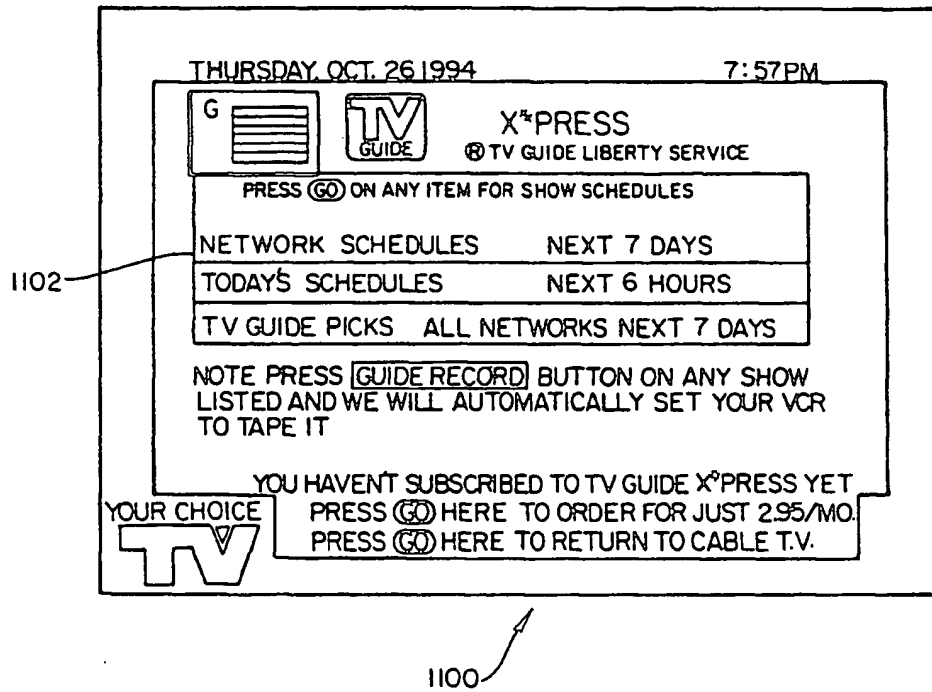


Fig. 16a



MOOD QUESTION MENUS

1114

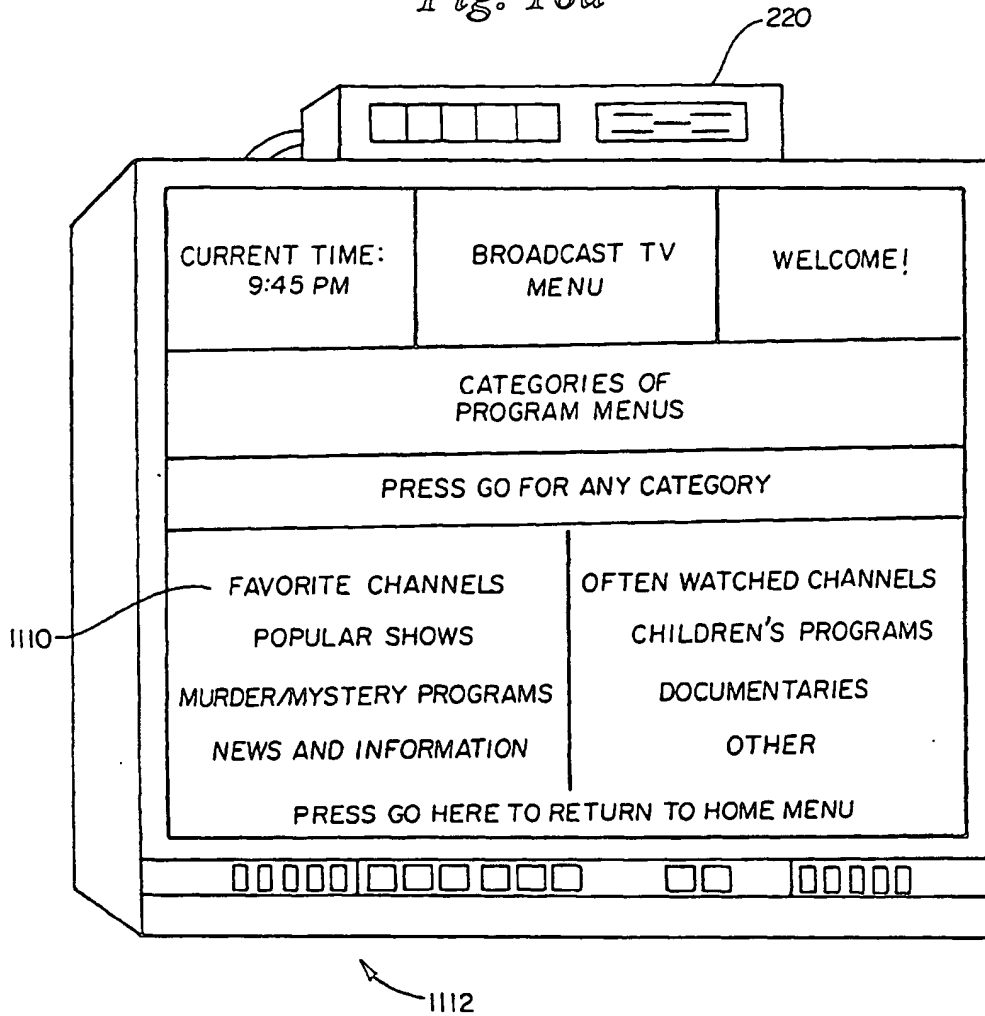

LENGTH OF PROGRAM DESIRED

SHORT	30 minutes or less
MEDIUM	30 to 60 minutes
LONG	60 minutes or more

Fig. 16b

1116



TYPE OF PROGRAM DESIRED

SERIOUS
THOUGHTFUL
LIGHT

Fig. 16c


1118



DO YOU WISH AN ACTIVE OR PASSIVE PROGRAM?


ACTIVE
PASSIVE

Fig. 16d

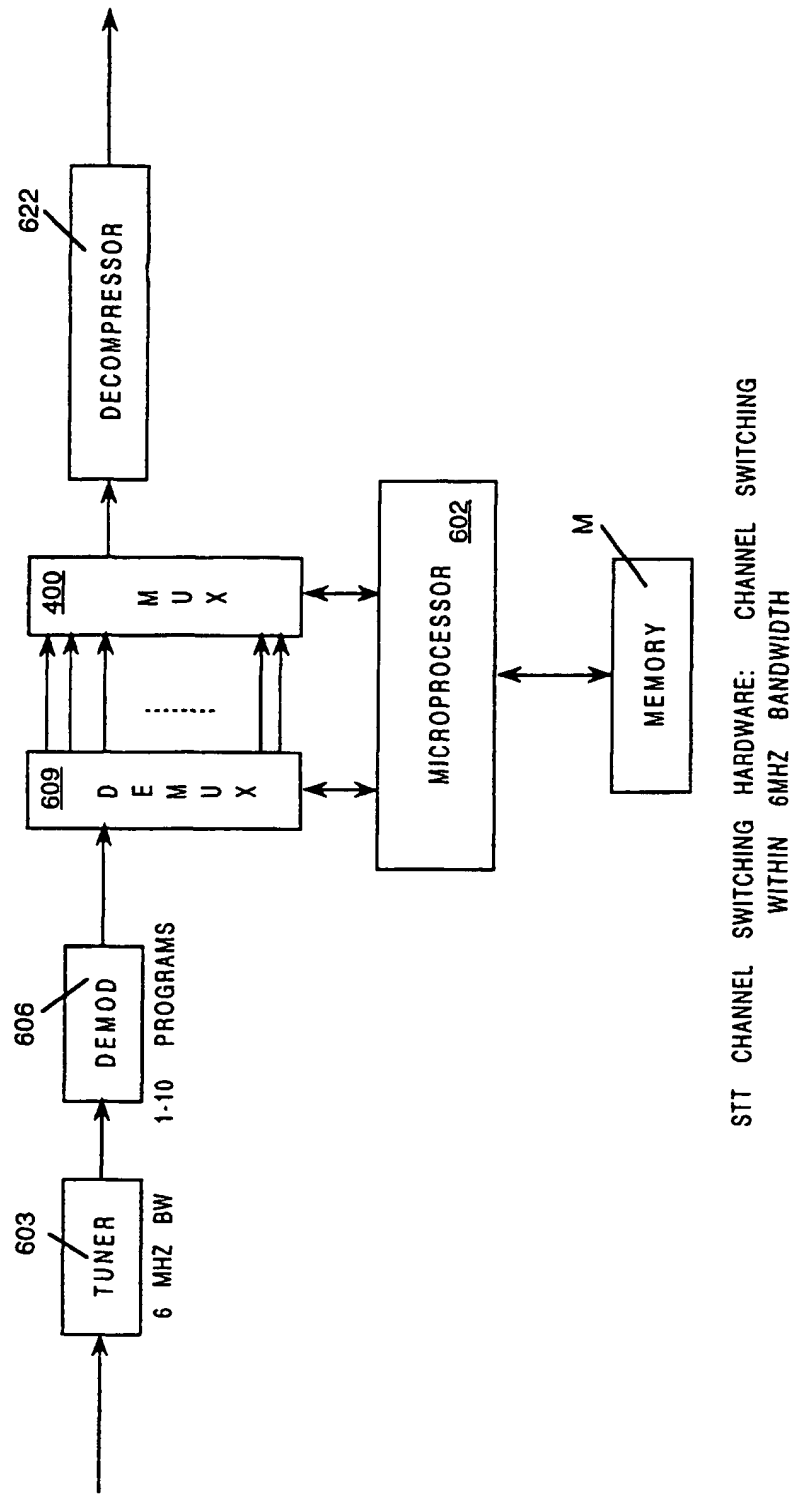

STT CHANNEL SWITCHING HARDWARE: CHANNEL SWITCHING
WITHIN 6MHZ BANDWIDTH

Fig. 17a

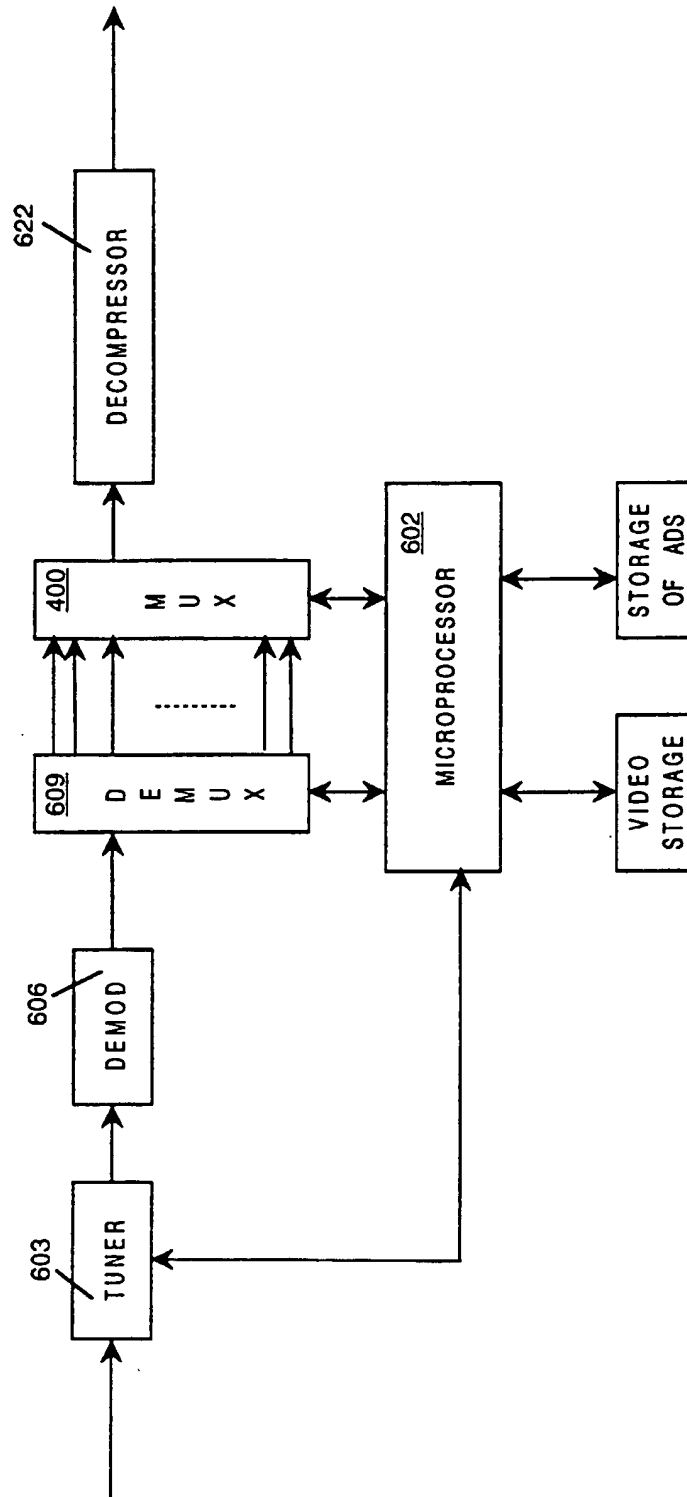

STT CHANNEL SWITCHING HARDWARE: CHANNEL SWITCHING
OUTSIDE 6MHZ BANDWIDTH

Fig. 17b

Fig. 18

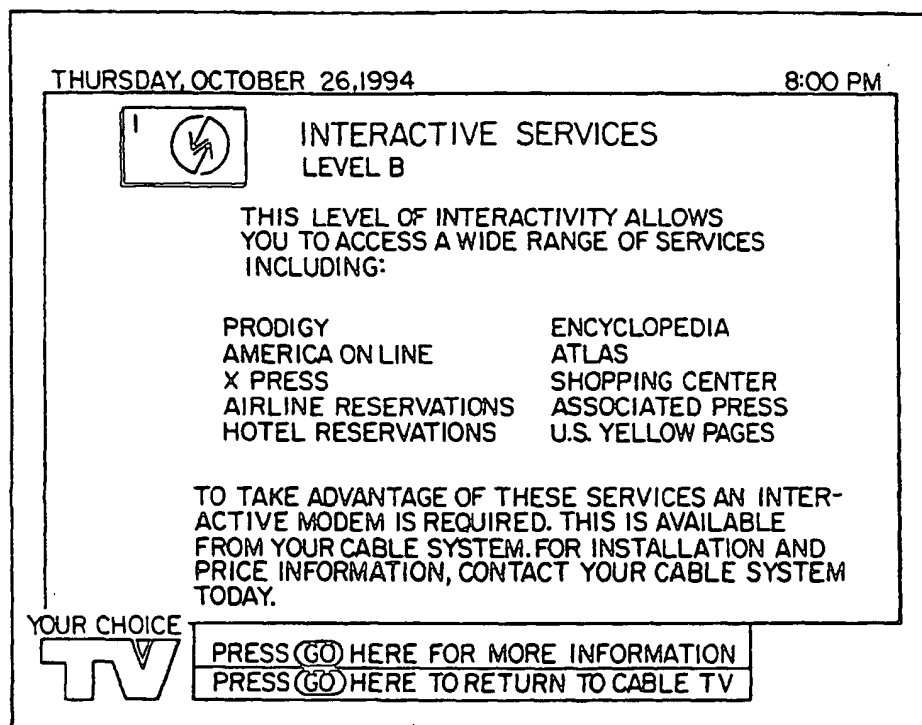


Fig. 19a

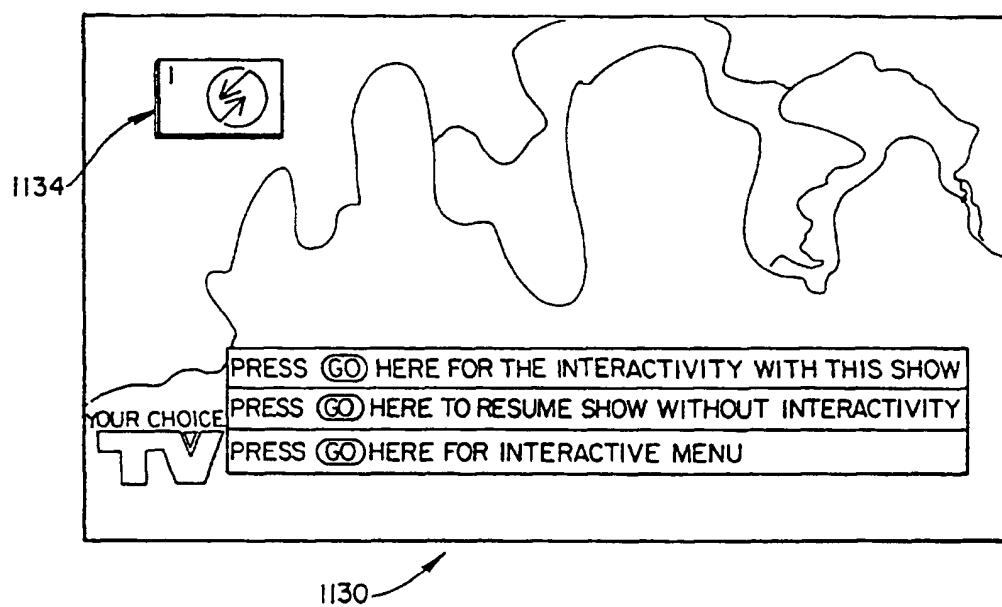


Fig. 19b


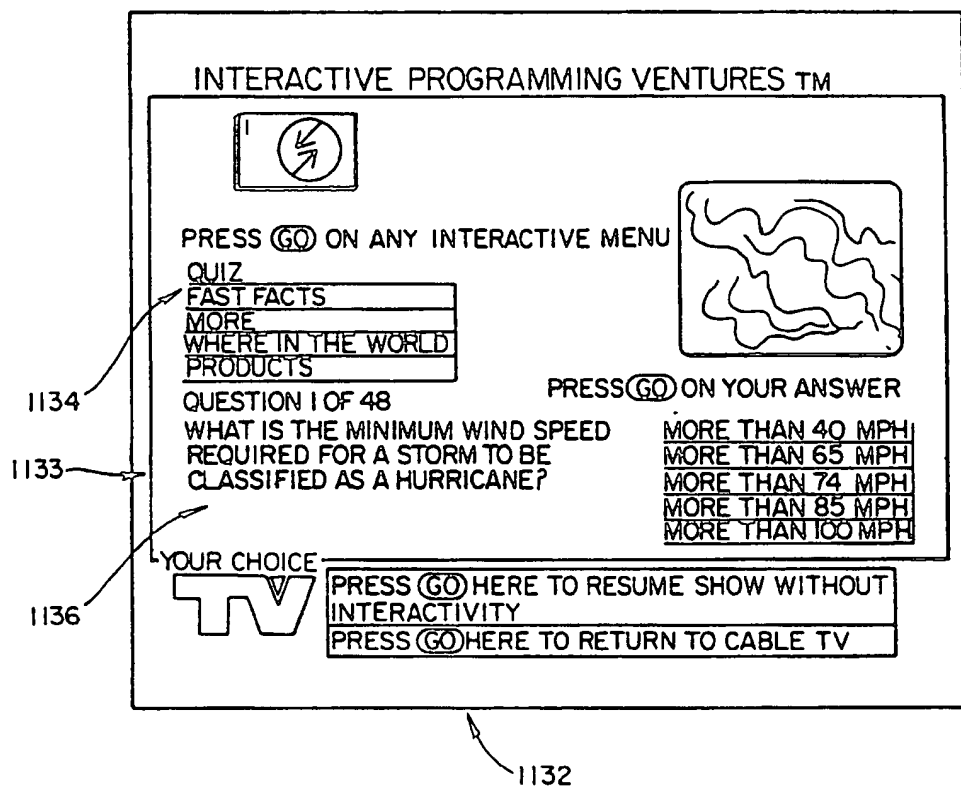



Fig. 20a

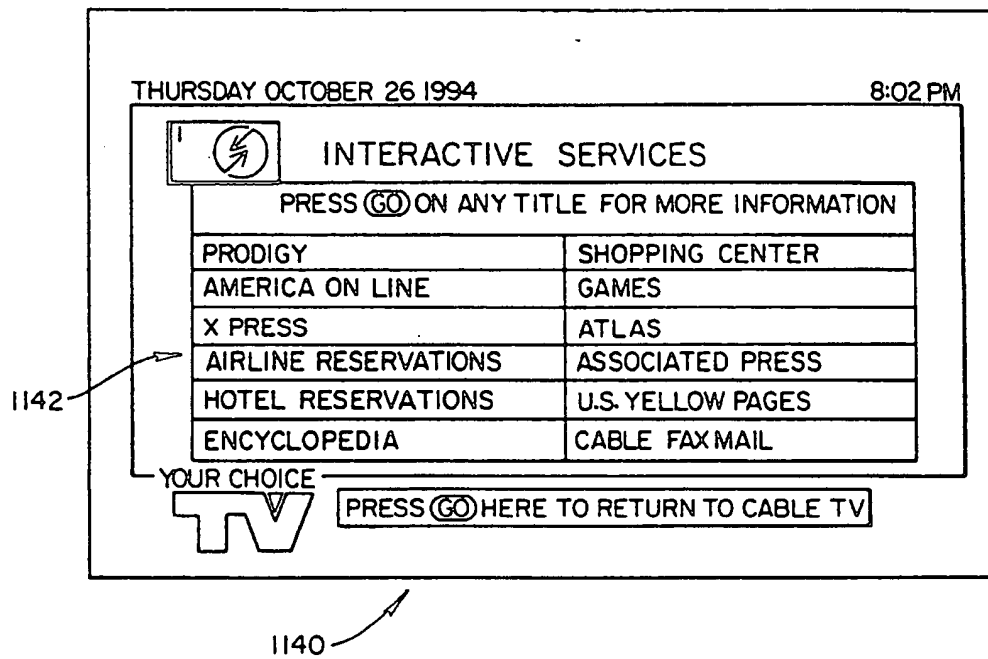

Thursday, October 26, 1994

8:04 PM


1144



AIRLINE INFORMATION AND RESERVATIONS(continued)

Here are your airline flight options for a morning departure from Phoenix to Dulles.
Press **GO** on Any Flight to Check Availability and Fare

Depart Time	Arrive Time	Airline	Flight No.	Stops	Connecting Through
6:15 AM	1:30 PM	AMERICAN	32	0	
7:30 AM	2:45 PM	AMERICAN	212	0	
8:00 AM	3:07 PM	DELTA	49	0	
10:30 AM	7:15 PM	US AIR	285	1	Chicago
11:25 AM	6:10 PM	UNITED	10	0	
11:45 AM	8:40 PM	UNITED	77	1	Dallas



Press **GO** Here to Return to Airline Main Menu


Press **GO** Here to Return to Menu

Press **GO** Here to Return to Cable TV

FIG. 20b

Thursday, October 26, 1994

8:05PM




AIRLINE INFORMATION AND RESERVATIONS(continued)


DELTA FLIGHT #49 from Phoenix to Dulles direct
departs 8:00 AM and arrives 3:07 PM










SEATS AVAILABLE ARE SHOWN IN BLUE

3 First Class Seats Remaining
15 Coach Class Seats Remaining


1152





Press  on Any Blue Seat(s) to Make Reservations


First Class	Coach Class	Aircraft Equipment 757
<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">  </div> <div style="border: 1px solid black; padding: 2px;">  </div> <div style="border: 1px solid black; padding: 2px;">  </div> </div>	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">  </div> <div style="border: 1px solid black; padding: 2px;">  </div> <div style="border: 1px solid black; padding: 2px;">  </div> </div>	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">  </div> <div style="border: 1px solid black; padding: 2px;">  </div> <div style="border: 1px solid black; padding: 2px;">  </div> </div>

YOUR CHOICE



Press  Here to Erase Above and Repeat

Press  Here to Cancel Above and Exit

Press  Here to Continue


1150

FIG. 20c

Thursday, October 26, 1994

8:06 PM

1156



AIRLINE INFORMATION AND RESERVATIONS(continued)

CREDIT CARD CHARGE

Amount: \$590.00 Delta Flight # 49

One Way: Phoenix to Dulles Date: 11/25/94

Departs: 8:00 AM Arrives: 3:07 PM Dinner

American
Express

Visa

Discover

Master
Charge

Enter Your Credit Card Number:

2

1

7

7

3

5


Enter Expiration Date (example 01/91 12/92):

Month:


01


Year:


92

Press  on
Credit Card You
Want to Use:

YOUR CHOICE



Press  Here to Erase Above and Repeat

Press  Here to Cancel Above and Exit



Press  Here to Confirm Above Charge

FIG. 20d

Thursday, October 26, 1994


8:08 PM



DMX Demonstration





Here are the menu options you'll enjoy:

Press  On the station you want

Top 5	Hard Rock Heavy Metal	Easy Listening Instrumentals	New Age Favorite Light Rock	Country Top 40 New Country	Rhythm and Blues Legends	Classical Piano
Top 10	Rock Classics	Easy List. Favorites	Beatles Only	Country Classics	Soul	Classical Strings
Top 40	Rap	Jazz	Rock Legends	Bluegrass	Soul Classics	Classical Guitar
Rock	'30s	'40s	'50s	'60s	'70s	'80s
Waltz	Latin	Disco	Polka	Reggae	Dance Fever	Teen Dance
You are Listening to: MAGGIE MAY by Rod Stewart 1972						
More Information on Current Artist/Song						
Screen ON/OFF						

All this for just \$ 4.95 per month. Less than 1/2 the cost of one CD! ORDER NOW.



Press  Here to Order DMX

Press  Here to Return to Cable TV

FIG. 21

Fig. 22

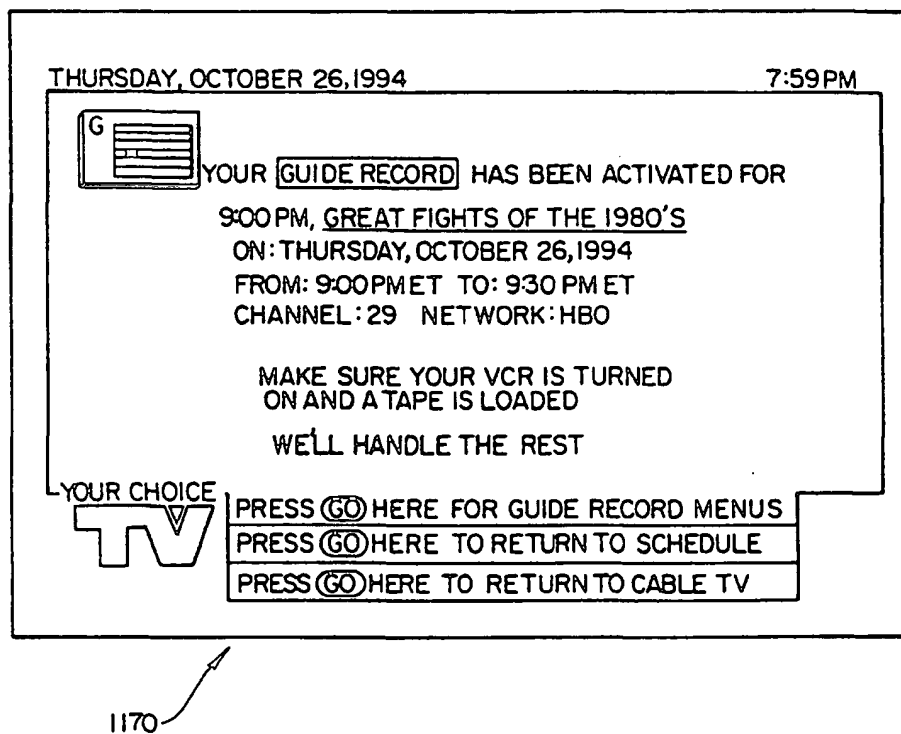


Fig. 23

